



Product catalog

More choice.
More efficiency.
More performance.





Additives

Oil additives	5
Fuel additives for gasoline	6
Fuel additives for diesel	7
Radiator additives	8

Lubricants

Engine oils 4-stroke car	10
Engine oils 2-stroke universal	17
Automatic transmission/steering gear oils	17
Multi-disc clutch/central hydraulic oils	19
Manual transmission/hypoid transmission/transfer case fluids	20
Hydraulic oils	22
Greases	23
Pastes	24

Vehicle care

Paint	26
Glass	27
Rims/tires	28
Top	28
Interior	29
Plastic	29
Rubber	30
Engine	30
Winter products	30

Repair aids/service products

Brake fluids	32
Radiator antifreeze	32
Rust solvent/multipurpose	34
Exhaust assembly and repair	36
Air-conditioning	36
Cleaner/oil binder	37
Hand care	37

Workshop Pro-Line

Additives	40
Service products	41
JetClean	43

Adhesives & sealants

Windshield repair	45
Sealants	45
Industrial adhesives	45
Corrosion protection	46
Underseal	47
Cavity protection	47



COMMERCIAL VEHICLES/CONSTRUCTION AND MINING EQUIPMENT

Additives	49
Engine oils	49
Automatic transmission fluids	50
Gear oils	50
Greases/pastes	51
Vehicle care	51

2-WHEEL/QUAD/KART/SNOWMOBILE

Additives	53
Engine oils 4-stroke - street	53
Engine oils 4-stroke - offroad	54
Engine oils 2-stroke - street	55
Engine oils 2-stroke - scooter	55
Engine oils 2-stroke - offroad	55
Gear oils	56
Fork oils/Shock absorber oils	56
Maintenance products for filters	57
Maintenance products	57
Brake fluids	58

BICYCLE PRODUCTS

Lubricants	60
Maintenance products	60
Tyre reparation	60

MARINE

Additives	62
Engine oils 4-stroke	62
Engine oils 2-stroke	63
Gear oils	64
Greases	64
Maintenance products	64

GARDEN EQUIPMENT

Lubricants	67
Maintenance Products	67

GUN CARE PRODUCTS

68

WORKSHOP EQUIPMENT/ACCESSORIES/TOOLS

Accessories for containers/drums	71
Accessories/tool – Greases	72
Accessories/tool – Adhesives & sealants - Underseal	72
Accessories/tool – Workshop chemical products	73
Accessories/tool – A/C system cleaning	73
Accessories/tool – Diesel particulate filter purge	73

FIRST AND SECOND PLACEMENTS

74

TABLE OF CONTENTS, NUMERIC

76



Additives

ADDITIVES	
Oil additives	5
Fuel additives for gasoline	6
Fuel additives for diesel	7
Radiator additives	8



Cera Tec

High-tech ceramic wear protection. Reduces friction and wear through ceramic compounds offering high chemical and thermal resistance. Prevents direct metal-to-metal contact, thus increasing the assembly service life. Reduces fuel consumption in gasoline and diesel engines thanks to the low-friction effect. Miscible with all commercially available motor oils and motor vehicle gear oils.

Area of use

For engines, manual transmissions, pumps and compressors. Is added to the respective oil. Self-mixing. Sufficient for 5 liters of oil. With a long-term effect lasting around 50,000 km. Suitable for toothed belts running in oil. Not suitable for use with wet clutches!

Cont.

300 ml

Packaging Unit

6

Part no.

3721⁷³



Oil Additive

The MoS₂ lubrication enhancer contained forms a high-load lubricating film on all rubbing and sliding metal surfaces. It reduces friction and ensures smoother running of the assemblies. This results in considerable fuel and oil savings, a scientifically proven reduction in rate of wear, high operating reliability and reliable emergency running properties.

For all commercially available motor oils in gasoline and diesel engines with and without a diesel particulate filter (DPF). Tested for use with turbochargers and catalytic converters. Suitable for toothed belts running in oil. Recommended dosage: 3-5 % added to the motor oil. Add to max. 2 % of the oil content on motorcycles with wet clutch.

200 ml

6

1012³³



Tappet Stop Noise

Reduces hydraulic tappet noise. Cleans oil holes and ducts in the oil circuit and ensures that hydraulic tappet once again works optimally. Increases the operational reliability and driving comfort of the vehicle. Improves the function of timing chain tensioners filled with oil pressure, which can result in the reduction of timing chain noise.

Suitable for all commercial motor oils in gasoline and diesel engines with and without diesel particulate filter (DPF). Tested safe with catalytic converters and turbochargers. Can contents are sufficient for up to 6 liters motor oil. Not suitable for motorcycles with wet clutches.

300 ml

6

2783¹³⁶



Engine Oil Resealer

Regenerates rubber and plastic engine seals such as shaft seals and valve stem seals and prevents oil stains under the vehicle. Counteracts oil dilution. Reduces engine noise and oil consumption through piston rings and valve guides.

Suitable for all commercial motor oils in gasoline and diesel engines with and without diesel particulate filter (DPF). Tested safe with catalytic converters and turbochargers. Can contents are sufficient for up to 5 l motor oil. Sealing action after 600 – 800 km mileage. Not suitable for motorcycles with wet clutches.

300 ml

6

2782¹³⁶



Viscoplus for Oil

Reduces oil consumption and improves compression through optimally flexible sealing. Stabilizes the motor oil and provides ideal oil pressure. Reduces engine noise build-up and ensures outstanding lubricating film stability. Reduces wear.

Suitable for all commercial motor oils in gasoline and diesel engines with and without diesel particulate filter (DPF). Tested safe with catalytic converters and turbochargers. Can contents are sufficient for up to 5 l motor oil. Not suitable for motorcycles with wet clutches.

300 ml

20

8958¹⁵²



Gear Protect

High-pressure wear protection additive from the latest technology. Reduces friction and wear. The transmission runs quieter, smoother and can be shifted more softly. With long-term effect of up to 100,000 km. Smooths tooth flanks and increases the stability of the components.

For manual transmissions, power take-off and differential gears. Contents sufficient for 2 l transmission oil. Not suitable for automatic transmissions and motorcycles with wet clutches. Add any time and when changing the transmission oil.

80 ml

6

1007⁸¹



ATF Additive

Optimally cares for rubber and plastic seals in steering gears and automatic transmissions. Leaks on transmissions and gears, caused by hardened and brittle seals, are prevented and eliminated. Cleans holes and channels in the transmission and refreshes the oil's performance. Reduces noise formation and improves the shifting in automatic transmissions. Extends the life of steering gears and automatic transmissions.

Add ATF Additive to the power steering reservoir or add to the transmission oil through the dipstick. The contents of 250 ml are sufficient for up to 8 l oil volume. Suitable for steering gears and automatic transmissions that are filled with ATF II and ATF III oils.

250 ml

6

5135⁷¹

OIL ADDITIVES

**Automatic Transmission Cleaner**

Cleans and frees the ATF circuit of deposits and residues. Provides for optimal shifting performance and prolongs transmission service life.

Area of use

Suitable for all automatic transmissions. Contents of can are sufficient to treat 6-9 liters of oil. Can be added to the gear oil through the dipstick opening using a funnel or used in all commercial automatic transmission cleaning devices.

Cont.	Packaging Unit	Part no.
300 ml	6	2512 ⁷¹

**Gear-Oil Additive**

Contains highly concentrated MoS₂ to reduce wear in manual and differential transmissions, axle drives without integrated wet differential locks and mechanical steering systems. MoS₂ reduces temperature peaks and ensures quieter running and smoother shifting. The transmission heats up less and benefits from smoother tooth faces in terms of quieter running and improved performance.

For manual and differential transmissions, axle drives without integrated wet differential lock and mechanical steering systems, especially under high thermal loads. 20 g is sufficient for 1 liter of gear oil. 50 g is sufficient for 2.5 liters of gear oil.

50 g	12	2510 ¹⁵⁵
------	----	---------------------

**Power Steering Oil Leak Stop**

The additives contained provide optimum care for rubber and plastic seals in the steering gear. Prevents oil loss, stops oil loss in steering gears that drip and regenerates hardened seals. Holes and ducts of the steering gear are cleaned and the performance of the oil is thus revitalized. The noise levels are reduced, the service life is extended and the repair costs are lowered.

Suitable for steering gears that are filled with ATF II, ATF III, ATF VI or central hydraulic system oils. Add to the compensating reservoir of the steering system. 35 ml is sufficient for 1 liter of oil.

35 ml	12	1099 ³⁴
-------	----	--------------------

**Engine Flush Plus**

Highly effective cleaning fluid for clearing the engine interior of troublesome deposits. Brings all types of oil-soluble and oil-insoluble residues into suspension and removes these from the oil circuit during the next oil change. Following this, the engine that has been cleared of deposits and contaminants and the fresh oil can then deliver its full performance. Wear in the engine is thus reduced and the service life is extended.

For gasoline and diesel engines. Can be safely used in vehicles with toothed belt running in oil. 300 ml sufficient for up to 6 l of oil. Not suitable for use in motorcycles with wet clutches!

300 ml	20	8374 ¹³⁵
--------	----	---------------------

FUEL ADDITIVES FOR GASOLINE

**Speed Tec Gasoline**

This highly modern fuel additive was specially developed to noticeably improve acceleration and throttle response under partial load. Provides more driving pleasure through optimized performance yield. The engine starts better and even runs more smoothly.

Suitable for all 2- and 4-cycle gasoline engines. Tested safe with catalytic converters and turbochargers. For adding directly to the fuel tank. Can contents are sufficient for up to 70 l fuel. Perfect for constant use for any kind of refueling.

250 ml	6	3720 ⁴⁹
--------	---	--------------------

**Injection Cleaner**

Removes deposits on injection valves, intake valves, spark plugs and in the combustion chamber and prevents new deposits from forming. Eliminates starting problems and rough engine running. Maintains all components of the gasoline injection system. Protects the entire fuel system against corrosion. Improves throttle response and compression. Optimizes the emission test values and the performance of the engine. Clean engines use less fuel and reduce the pollutant emissions.

Suitable for all gasoline engines – preventive or remedial. To be added directly into the fuel tank. 300 ml sufficient for up to 70 l of fuel. Effect remains for up to 2,000 km. Tested for use with turbochargers and catalytic converters.

300 ml	20	1803 ¹⁵²
50 l	1	5113 ³⁴

**Carburetor and Valve Cleaner**

Increases engine performance. Removes deposits in carburetor, in valves, spark plugs and in the combustion chamber and prevents renewed formation. Saves fuel. Improves compression. Protects the entire fuel system from corrosion. Prevents carburetor icing. Clean engines need less fuel and reduce emissions.

Suitable for all gasoline engines – as a preventative measure or to solve problems. Tested safe with catalytic converters and turbochargers. For adding directly to the fuel tank. 300 ml are sufficient for up to 70 l fuel. Effect lasts up to 2,000 km. Can also be put directly into the carburetor with the engine running.

300 ml	20	2507 ¹³⁵
--------	----	---------------------



Lead Substitute

Lubricates and protects valve seat ring on vehicles that originally required leaded fuel. Reduces wear on the cylinder head, maintaining optimal compression. Prevents engine breakdown and increases reliability.

Area of use

For older gasoline engines for which the manufacturer originally specified leaded gasoline. For preventative use. Tested safe with catalytic converters and turbochargers. For adding directly to the fuel tank. One filling with the 25 ml dispenser is sufficient for 25 l fuel. For permanent use every time you fill up.

Cont.	Packaging Unit	Part no.
250 ml	6	1010 ³³
250 ml	12	1838 ¹⁵²



DFI Cleaner

Modern fuel additive with polyetheramine technology. Thanks to the use of active PEA, achieves the greatest cleaning effect in the fuel system as well as excellent piston and combustion chamber cleanliness. Considerably reduces the risk for damage to the engine due to low-speed pre-ignition (LSPI).

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Opel 95527846, Opel 95527847, Opel 95599923

Suitable for all passenger cars with 4-stroke gasoline engines.

120 ml	6	21377 ³⁴
--------	---	----------------------------



Hybrid Additive

Additive specially developed for the latest hybrid engines. With outstanding cleaning effect adapted to the engine technology. Removes deposits and protects against corrosion. Stabilizes the fuel and protects against aging and oxidation.

Suitable for all hybrid vehicles with gasoline engine. To be added directly into the fuel tank. 250 ml is sufficient for up to 75 liters of fuel (dosage 1:300).

250 ml	6	1001 ⁷¹
--------	---	---------------------------



Octane Plus

Self-mixing combination of agents formulated according to state-of-the-art additive and fuel technology. Universal use. Increases the research octane number (RON) of the fuel by 2-4 points, depending on the RON. Thanks to the increased performance of the fuel, engine damage caused by knocking combustion is prevented. The increase of the octane number ensures low fuel consumption.

IMPORTANT: Only available for order outside Europe.

For increasing the octane number of gasolines in vehicles without particulate filters.

150 ml	20	2956 ¹⁵²
--------	----	----------------------------



Fuel Protect Gasoline

Ash-free, self-mixing combination of active agents according to the latest additive, fuel and engine technology. Specially developed to satisfy the demands and operating conditions of today's engines. Prevents corrosion problems in the fuel system and thus prevents operational malfunctions.

For all gasoline engines, specifically when used with fuels slightly contaminated with water. Add to fuel whenever filling up. 300 ml sufficient for 60 l fuel.

300 ml	20	2530 ¹³⁵
--------	----	----------------------------



Catalytic-System Cleaner

Protects the catalytic converter from clogging with soot. Cleans intake valves and the combustion chamber. Improves the combustion of the fuel. Clean engines reduce fuel consumption and therefore CO₂ emissions. Prevents corrosion in the fuel system.

Suitable for all gasoline engines with a catalytic converter.

300 ml	20	8931 ¹⁵²
--------	----	----------------------------

FUEL ADDITIVES FOR DIESEL



Super Diesel Additive

Removes deposits in the diesel injection system and in the combustion chamber and prevents new deposits. Maintains all components of the diesel injection system. Prevents any seizing up and gumming up of nozzle needles. Boosts the cetane number, improves the ignition performance of the diesel fuel and ensures smooth engine running. Protects the entire fuel system against corrosion and wear. Optimizes the emission test values and the performance of the engine. Clean engines use less fuel and reduce the pollutant emissions.

Suitable for all diesel engines with and without a diesel particulate filter. Preventive or remedial. Fully compatible with all conventional diesel and biodiesel fuels. 250 ml is sufficient for up to 75 l of fuel (dosage 1:300). Effect remains for up to 2,000 km. Tested for compatibility with turbochargers.

250 ml	20	1806 ¹⁵²
--------	----	----------------------------

FUEL ADDITIVES FOR DIESEL



Diesel Particulate Filter Protector

Ensures optimum combustion of the fuel, reduces soot formation, lowers emissions and extends the service life of diesel particulate filters. Vehicles used for short trips and city traffic are especially affected by clogged diesel particulate filters. Regular use keeps the diesel particulate filter clean, avoiding expensive repairs and downtimes.

Area of use

Cont.	Packaging Unit	Part no.
250 ml	20	7180 ¹⁵²

For diesel vehicles with diesel particulate filter if these are not fitted with an electronically controlled additive tank system for filter regeneration such as Citroën and Peugeot. Contents sufficient for 50 – 70 l of diesel fuel.



Diesel Purge

Removes deposits on injection nozzles and in the combustion chamber. Increases the cetane number. Eliminates engine operation problems such as knocking in idle and provides round and quiet engine running. Protects the entire fuel system from corrosion. Optimizes the emission test values. Can also be used as a preventative measure. Clean engines need less fuel and reduce emissions.

For all diesel engines both with and without diesel particulate filters. Preventative during every inspection, after repairs on the fuel system or to solve problems (see application description on the pack or in the technical datasheet). Turbocharger tested. Perfectly compatible with all conventional diesel and biodiesel fuels. Can contents are sufficient for up to 75 l fuel.

500 ml	20	8380 ¹³⁵
--------	----	---------------------



Anti-bacterial Diesel additive

Highly effective biocide with wide action spectrum against bacteria, yeasts and moulds. For preventive use in diesel-powered vehicles that have been decommissioned for a long time or are in low use such as construction machinery, commercial vehicles, motorhomes, passenger cars, storage tankers etc. and for sterilizing already infested tank systems. **Use biocides safely. Always read the label and product information before use.**

For all diesel engines both with and without diesel particulate filters – as a preventative measure or to deal with problems. Turbocharger tested. For adding directly to the fuel tank. Perfectly compatible with all conventional diesel and biodiesel fuels. One filling of the dispenser 25 ml (integrated in the cap) is sufficient during preventative use for 25 l fuel (dosing 1 : 1000) and for using during problems for 5 l fuel (dosing 1:200).

1 l	6	21317 ²⁶⁶
-----	---	----------------------



Common Rail Additive

Maintains and protects the entire fuel system from wear, deposits and corrosion. Improves engine running and prevents performance decrease. Increases the lubricity of diesel fuels. Clean engines need less fuel and reduce emissions.

For all diesel engines with and without diesel particulate filters – especially suitable for preventative use for common rail and pump-jet technology. Tested for turbochargers. For adding directly to the fuel tank. Can contents are sufficient for up to 75 l fuel. Effect lasts up to 2,000 km.

250 ml	6	8953 ¹⁵²
--------	---	---------------------

RADIATOR ADDITIVES



Radiator Cleaner

Deposits in the cooling/heating system create blockages for heat exchange and they also block thermostat valves and control mechanisms. When engine temperatures are too high, the engine runs uneconomically and suffers excessive wear at considerable risk of damage. LIQUI MOLY Radiator Cleaner removes deposits containing oil and lime, and ensures that the engine runs reliably and at the optimum temperature. Does not contain aggressive acids or alkalis.

For all coolant and heating systems in water-cooled engines. 300 ml is sufficient for 10 l of coolant (dosage 1:33). Compatible with all conventional coolant additives and antifreezes (with the exception of "low conductivity" coolants).

300 ml	20	1804 ¹⁵²
--------	----	---------------------



Radiator Stop Leak

It's hard to locate small leaks caused by stone chipping, porous soldered connections or hairline cracks in the cooling system on water-cooled engines – the only clue is in the reduced coolant level. This dispersion completely seals this type of leaks immediately and safeguards the combustion chamber against damage caused by coolant ingress. Compatible with all conventional coolant additives and antifreezes. Can also be used preventively.

For all coolant and heating systems with and without water filters (with the exception of "low conductivity" coolants). Also for aluminum and plastic radiators. 150 ml is sufficient for up to 7 l of coolant; 250 ml is sufficient for up to 10 l of coolant.

150 ml	20	8956 ¹⁵²
--------	----	---------------------



Lubricants

LUBRICANTS

Engine oils 4-stroke car	10
Engine oils 2-stroke universal	17
Automatic transmission/steering gear oils	17
Multi-disc clutch/central hydraulic oils	19
Manual transmission/hypoid transmission/ transfer case fluids	20
Hydraulic oils	22
Greases	23
Pastes	24

ENGINE OILS 4-STROKE CAR



0W-16

**Special Tec AA 0W-16**

Premium class low-friction motor oil. Provides outstanding protection against wear, lowers oil and fuel consumption, keeps the engine clean and ensures fast oil penetration.

Specifications and approvals: API SP, ILSAC GF-6B

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Honda, Lexus, Suzuki, Toyota

Area of use

Ideal for modern Asian and American gasoline engines. Especially where there are long intervals between oil changes and high requirements on the engine.

Cont.	Packaging Unit	Part no.
1 l	6	21326 ¹³
5 l	4	21328 ¹³
20 l	1	21324 ⁷⁵

0W-20

**Special Tec AA 0W-20**

Modern premium-class fuel-efficient engine oil, which especially has been developed for the year-round use in Asian and American vehicles. The combination of unconventional base oils on synthesis technology in connection with the latest additives guarantees an engine oil which protects against wear, reduces the oil and fuel consumption, keeps the engine clean and provides for a quick oiling of the engine.

Specifications and approvals: API SP, ILSAC GF-6A

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Chrysler MS-6395, Fiat 9.55535-CR1, Ford WSS-M2C 947-A, Ford WSS-M2C 947-B1, Ford WSS-M2C 962-A1, GM 6094 M, GM dexos1 Gen 3, Honda, Hyundai, Kia, Mazda, Mitsubishi Dia Queen, Nissan, Subaru, Toyota

Ideal for modern Asian and American gasoline engines. Especially suitable where there are long intervals between oil changes and heavy duty engine requirements.

1 l	6	6738 ¹³
5 l	4	6739 ¹³
20 l	1	8071 ⁷¹
60 l	1	8072 ³⁴

**Special Tec V 0W-20**

Low-friction motor oil based on synthetic technology. The combination of non-conventional base oils and modern additive technology reduces the friction inside the engine to a minimum and ensures maximum engine performance as well as low fuel consumption.

Specifications and approvals: ACEA C5, API SN, Volvo VCC RBS0-2AE

This lubricant was developed primarily for use in various Volvo models. Tested safe with catalytic converters and turbochargers.

1 l	6	20631 ¹³
5 l	4	20632 ¹³
20 l	1	20633 ⁷¹

**Top Tec 6200 0W-20**

High-tech low-friction motor oil based on synthetic technology. Developed for the high requirements of Audi, Porsche, Seat, Škoda and VW. The lower viscosity ensures excellent cold-start behavior, improves engine efficiency and reduces consumption. Innovative additive technology ensures excellent protection against wear, impressive engine cleanliness and greater oxidation stability. Enables extremely long oil change intervals (WIV etc.).

Specifications and approvals: ACEA C5, Ford WSS-M2C 956-A1, Porsche C20, VW 508 00, VW 509 00

For various vehicles from Audi, Porsche, Seat, Škoda and VW. Use only in gasoline and diesel engines with a particulate filter that require a lubricant of VW standard 508 00/509 00 or Porsche standard C20. Tested for use with turbochargers and catalytic converters. Not backwards compatible.

1 l	6	20787 ¹³
5 l	4	20789 ¹³
20 l	1	20782 ³⁴
60 l	1	20783 ³⁴
205 l	1	20785 ³⁴

**Top Tec 6300 0W-20**

Premium low-friction motor oil based on synthetic technology. Provides optimum lubrication, excellent lubricating film stability and minimum wear and deposits even under extreme loads. Ideally suited for engines with start-stop system. Ensures maximum performance with low fuel consumption.

Specifications and approvals: ACEA C5, API SN, Jaguar / Land Rover STJLR.51.5122, MB-Approval 229.71

Specially designed for the high demands that Jaguar, Land Rover and Mercedes-Benz make for various gasoline and diesel engines. Suitable for use where there are long intervals between oil changes and high engine load.

5 l	4	21217 ¹³
-----	---	---------------------

**Top Tec 6600 0W-20**

Premium low-friction motor oil based on synthetic technology. Ensures optimum lubrication, outstanding lubricating film stability and minimum wear and deposits even under extreme loads. Ideally suited for engines with start/stop system. Guarantees maximum performance with low fuel consumption.

Specifications and approvals: ACEA C5, ACEA C6, API SP, ILSAC GF-6A, BMW Longlife-17 FE+, Jaguar / Land Rover STJLR.03.5006, MB-Approval 229.71, MB-Approval 229.72, Opel OV 040 1547 - A20

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Chrysler MS-12145, Fiat 9.55535-GSX, Ford WSS-M2C 947-B1, Ford WSS-M2C 962-A1

For gasoline and diesel vehicles. Specially developed for the requirements of BMW, Mercedes-Benz, Opel and other manufacturers.

1 l	6	21410 ¹³
5 l	4	21411 ¹³
20 l	1	21412 ¹³
60 l	1	21442 ³⁴
205 l	1	21443 ³⁴

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based

0W-20

**Molygen New Generation 0W-20**

High-performance, low-friction engine oil for year-round use. The combination of unconventional base oils and advanced additive technology as well as the special Molygen additive ensures that the motor oil is of low viscosity with a high shear stability and reliably prevents the formation of deposits, significantly reducing frictional losses in the engine and providing the optimum protection from wear. The results are savings in fuel and an extended service life for the engine.

Specifications and approvals: API SP, ILSAC GF-6A

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Chrysler MS-6395, Fiat 9.55535-CR1, Ford WSS-M2C 947-A, Ford WSS-M2C 947-B1, Ford WSS-M2C 962-A1, GM 6094 M, GM dexos1 Gen 3, Honda, Hyundai, Kia, Mazda, Mitsubishi, Mitsubishi Dia Queen, Nissan, Subaru, Toyota

Area of use

Optimum for modern Asian and American gasoline engines with multi-valve technology and turbocharging with and without charge air cooling. For the protection and value conservation of the engine during long intervals between oil changes and when there are extreme engine requirements.

Cont.	Packaging Unit	Part no.
1 l	12	21356 ¹³
4 l	4	21357 ¹³

0W-30

**Special Tec F 0W-30**

Low-friction motor oil based on synthetic technology that was developed specially for the requirements of Ford diesel engines. The excellent adhesion of the lubricant to the metal surfaces makes the oil outstandingly suitable for vehicles with start-stop systems. This high-performance lubricant meets the requirements of turbocharging and modern exhaust gas aftertreatment systems such as catalytic converters and diesel particulate filters.

Specifications and approvals: ACEA C2, API SN, Ford WSS-M2C 950-A, Jaguar / Land Rover STJLR.03.5007

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: IVECO 18-1811 SC1 LV

All-season HC synthetic motor oil. Specially for TDCi diesel vehicles from Ford as of model year 2014. Tested for use with turbochargers, catalytic converters and diesel particulate filters.

1 l	6	8902 ¹³
5 l	4	8903 ¹³
20 l	1	20724 ⁷¹

**Special Tec V 0W-30**

Especially suitable for Volvo vehicles.

Low-friction engine oil based on synthesis technology – ensures reliable prevention of deposits, has an extremely high shear stability, reduces friction in the engine and provides excellent protection against wear. Optimally suited to state-of-the-art diesel and gasoline engines with and without multi-valve technology, Valvetronic, turbochargers and with and without diesel particle filters (DPF) or intercooling. It is especially suitable for long oil change intervals and high engine loads.

Specifications and approvals: ACEA A5, ACEA B5, API SL, API CF, ILSAC GF-3, Volvo VCC 95200377

This lubricant was developed primarily for use in various Volvo models. Other manufacturers such as Mitsubishi, Renault, Jaguar, Honda etc. also use lubricants with these specifications in various vehicle types.

1 l	6	2852 ¹³
5 l	4	2853 ¹³
20 l	1	2363 ³⁴

**Synthoil Longtime Plus 0W-30**

Special development for VW, Audi, SEAT and SKODA gasoline and diesel vehicles with service interval extension (also pump jet engines).

The fully synthetic low-viscosity motor oil from the Longlife 2 generation keeps the engine perfectly clean. Exceeds the high Volkswagen test requirements. Reduces fuel consumption in one of the toughest consumption tests in Europe (CEC-L-54-T-96/ MB M 111) by more than 2.5% as compared with the specified reference oil. Fast cold-start oiling provides excellent engine wear protection during the start and warm-up phase.

Specifications and approvals: ACEA A5/B5, VW 506 01

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: VW 503 00, VW 506 00

All-year oil for gasoline and diesel engines with and without pump-jet technology. Specially developed for vehicles with service interval extension (German abbreviation: WIV) from Audi, Volkswagen, Seat, Skoda. Tested safe with catalytic converters and turbochargers.

5 l	4	1151 ⁷¹
-----	---	--------------------

**Top Tec 4210 0W-30**

High-tech low-friction motor oil based on synthetic technology. Ensures maximum performance, low fuel consumption and optimum lubrication under all operating conditions. Reduces friction between moving engine parts and minimizes wear. The low proportion of ash-forming ingredients ensures maximum service life of the particulate filters.

Specifications and approvals: ACEA C3, BMW Longlife-04, MB-Approval 229.51, MB-Approval 229.52, Porsche C30, VW 504 00, VW 507 00

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: API SN

For gasoline and diesel vehicles also particulate filter. Specially developed for vehicles of Audi, Porsche and the Volkswagen Group, which, according to the Motor Oil Strategy 2020/2021, prescribe a lubricant of this specification and viscosity in various models worldwide.

1 l	6	21604 ²⁴⁷
5 l	4	21605 ²⁴⁷
20 l	1	21606 ²⁴⁷
205 l	1	21608 ³⁴

**Top Tec 4310 0W-30**

Sophisticated, low-ash low-friction motor oil for year-round use. The combination of synthetic technology and innovative additives provides outstanding protection against wear and reduces oil and fuel consumption while ensuring fast oil penetration of the engine.

Specifications and approvals: ACEA C2, Peugeot Citroen (PSA) B71 2312

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Fiat 9.55535-DS1, Fiat 9.55535-GS1

Ideal for the latest diesel and gasoline engines with and without multi-valve technology, turbocharging, charge air cooling and diesel particulate filter (DPF). In addition to various vehicles from PSA as well as Fiat, Alfa Romeo (TwinAir and MultiAir engines), can also in vehicles from other manufacturers that require a motor oil with this specification. Outstanding suitability for use in gas-driven passenger cars (CNG/LPG).

1 l	6	2361 ¹³
5 l	4	2362 ¹³
20 l	1	3737 ⁷¹
205 l	1	3739 ³⁴

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

¹³ BOOKLET ³⁴ D-GB ⁷¹ D-GB-I-E-P ²⁴⁷ D-BOOKLET

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based



ENGINE OILS 4-STROKE CAR



0W-30

**Top Tec 6100 0W-30**

Motor oil based on synthetic technology. Ensures outstanding performance and a long engine service life. Improves the viscosity, lowers friction and reduces fuel consumption. Additives with a much lower proportion of ash-forming substances provide optimal protection for the diesel particulate filter from dirt. Keeps sensitive engine components clean.

Specifications and approvals: ACEA C2, API SP, BMW Longlife-12 FE, MB-Approval 227.61, MB-Approval 229.61

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: BMW 83 21 2 365 935, BMW 83 21 2 405 097, BMW 83 21 2 405 666

Area of use

Due to the low HTHS viscosity, the motor oil may only be used in approved BMW diesel and gasoline engines.

Cont.	Packaging Unit	Part no.
1 l	6	20777 ¹³
5 l	4	20779 ¹³

0W-40

**Synthoil Energy 0W-40****For the greatest engine performance!**

Fully synthetic low-viscosity motor oil. Fast cold start properties. Keeps oil consumption low. Prevents build-up of harmful deposits. Excellent dirt-suspending and cleaning properties keep the engine optimally clean.

Specifications and approvals: ACEA A3, ACEA B4, API SN

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: BMW Longlife-98, Ford WSS-M2C 937-A, MB 229.3, Porsche A40, VW 502 00, VW 505 00

All-year oil for gasoline and diesel engines. Tested safe with catalytic converters and turbochargers.

5 l	4	9515 ¹³
20 l	1	1362 ⁷¹

5W-20

**Special Tec AA 5W-20**

Modern premium-class fuel-efficient engine oil, which especially has been developed for the year-round use in Asian and American vehicles. The combination of unconventional base oils on synthesis technology in connection with the latest additives guarantees an engine oil which protects against wear, reduces the oil and fuel consumption, keeps the engine clean and provides for a quick oiling of the engine.

Specifications and approvals: API SP, ILSAC GF-6A

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Chrysler MS-6395, Fiat 9.55535-CR1, Ford WSS-M2C 930-A, Ford WSS-M2C 945-A, Ford WSS-M2C 945-B1, Ford WSS-M2C 960-A1, GM 6094 M, GM dexos1 Gen 3, Honda, Hyundai, Kia, Mazda, Mitsubishi Dia Queen, Nissan, Toyota

Ideal for modern Asian and American gasoline engines. Especially suitable where there are long intervals between oil changes and heavy duty engine requirements.

1 l	6	20792 ¹³
5 l	4	20793 ¹³
20 l	1	3834 ⁷¹

**Special Tec F ECO 5W-20**

Low-friction motor oil based on synthetic technology. Reliably prevents the formation of deposits, ensures excellent lubrication reliability and enables high fuel savings. In terms of the wear resistance, the requirements of the older Ford standard WSS-M2C913-C are met and, in certain points, even exceeded. Ford recommends using this for all engines for which oils from the specifications WSS-M2C913-B, WSS-M2C913-C or WSS-M2C925-B are currently prescribed.

Specifications and approvals: ACEA C5, API SN, Ford WSS-M2C 948-B, Jaguar / Land Rover STJLR.03.5004

For Ford gasoline engines except Ford Ka (08/2008-), Focus ST and Focus RS (2004.75 with 2.5 l Duratec-ST (V15) engine). A lubricant from this specification is prescribed for EcoBoost engines. This motor oil is fully compatible with older versions.

20 l	1	3842 ⁷¹
------	---	--------------------

**Special Tec LR 5W-20****Especially suitable for Jaguar and Land Rover.**

Low-friction engine oil, which provides excellent protection against wear, reduces oil and fuel consumption, keeps the engine clean and ensures its fast lubrication.

Specifications and approvals: ACEA A1, ACEA B1, API SL, Ford WSS-M2C 925-B, ILSAC GF-3, Jaguar / Land Rover STJLR.03.5004

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Ford WSS-M2C 925-A

Specially tailored to the high requirements set by Jaguar and Land Rover for their vehicles. It is suitable for long oil change intervals and high engine loads.

5 l	4	8460 ¹³
-----	---	--------------------

5W-30

**Leichtlauf Performance 5W-30**

Low-friction motor oil for gasoline and diesel vehicles with and without diesel particulate filter (DPF) and turbocharger. Protects against wear, reduces oil and fuel consumption and ensures fast oil penetration of the engine.

Specifications and approvals: ACEA C3, API SP

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: ACEA C2, MB 229.31

For gasoline and diesel engines with multi-valve technology, Valvetronic and turbocharging (with or without charge air cooling). Also ideal for use in gas-driven vehicles (CNG/LPG).

1 l	12	21363 ¹³
5 l	4	21364 ¹³
20 l	1	21365 ⁷⁵
205 l	1	21366 ³⁴

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based

5W-30

**Molygen New Generation 5W-30 DPF**

Synthetic technology low-friction motor oil with innovative Molygen wear-protection technology and extremely high power reserve for maximum performance. Good dirt suspending and cleaning capacity ensures optimum engine cleanliness. The results are savings in fuel and an extended service life for the engine. Assures reliable operation and maximizes the operating life of the diesel particulate filter (DPF). Exceeds the test requirements of well-known vehicle manufacturers.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: ACEA C2, ACEA C3, API SN, BMW Longlife-04 (up to 2018), Fiat 9.55535-S3, Ford WSS-M2C 917-A, GM dexos2, GWM, HAVAL, Hyundai, Kia, MB 229.31, MB 229.51, MB 229.52, Opel GM-LL-A-025, Opel GM-LL-B-025, VW 505 00, VW 505 01, Wuling

Area of use

For gasoline and diesel engines including common rail technology. Particularly suited for vehicles with a diesel particulate filter (DPF), also for retrofits. Tested for use with turbochargers and catalytic converters.

Cont.	Packaging Unit	Part no.
1 l	12	21224 ¹³
4 l	4	21225 ¹³

**Leichtlauf HC7 5W-30**

First class, modern, low-friction engine oil for year-round use. The combination of unconventional hydrocracked-based base oils and the latest additive technology has provided an engine oil which is guaranteed to reduce oil and fuel consumption while providing for rapid oil penetration in the engine.

Specifications and approvals: ACEA A3, ACEA B4

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: API SN, BMW Longlife-98, Chrysler, Daihatsu, Ford, GM, Honda, Hyundai, Isuzu, Kia, Mazda, MB 229.3, Mitsubishi, Nissan, Opel GM-LL-A-025, Opel GM-LL-B-025, Renault RN 0700, Renault RN 0710, Subaru, Suzuki, Toyota, VW 502 00, VW 505 00

Optimum for modern gasoline and diesel engines with multi-valve technology and turbocharging with and without charge air cooling, and for use in gas fuelled (CNG/LPG) passenger cars. Especially suitable where there are long intervals between changes and heavy duty engine requirements.

205 l	1	21123 ³⁴
-------	---	----------------------------

**Special Tec AA 5W-30**

Modern premium-class fuel-efficient engine oil, which especially has been developed for the year-round use in Asian and American vehicles. The combination of unconventional base oils using synthetic technology together with the latest additive technology guarantees a motor oil that provides exceptional protection against wear, reduces oil and fuel consumption and keeps the engine clean while ensuring fast oil penetration of the engine.

Specifications and approvals: API SP, ILSAC GF-6A

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Chrysler, Fiat 9.55535-CR1, Ford WSS-M2C 946-A, Ford WSS-M2C 946-B1, Ford WSS-M2C 961-A1, GM 6094 M, GM dexos1 Gen 3, GWM, HAVAL, Honda, Hyundai, Kia, Mazda, Nissan, Subaru, Toyota, Wuling

Optimum for modern Asian and American gasoline engines with multi-valve technology and turbocharging with and without charge air cooling. Especially suitable where there are long intervals between oil changes and heavy duty engine requirements.

1 l	6	7615 ¹³
5 l	4	7530 ¹³
20 l	1	7517 ⁷¹
205 l	1	7518 ³⁴

**Special Tec B FE 5W-30**

Low-friction motor oil based on synthetic technology with a premium additive package. Minimizes friction in the engine and ensures maximum engine performance and low fuel consumption.

Specifications and approvals: ACEA A5, ACEA B5, API SL, BMW Longlife-01 FE

Primarily developed for the requirement of BMW gasoline engines without particulate filter from model year 2002 and selected BMW M models. Tested for use with turbochargers and catalytic converters.

20 l	1	21383 ⁷⁵
205 l	1	21385 ³⁴

**Special Tec F 5W-30**

Particularly suitable for Ford vehicles.

Low-friction motor oil based on synthetic technology. Reliably prevents the formation of deposits, has extremely high shear stability, reduces frictional losses in the engine and provides outstanding protection against wear. Especially suitable where there are long intervals between oil changes and heavy duty engine requirements.

Specifications and approvals: ACEA A5, ACEA B5, Ford WSS-M2C 913-D, Jaguar / Land Rover STJLR.03.5003

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Fiat 9.55535-G1, Ford WSS-M2C 913-A, Ford WSS-M2C 913-B, Ford WSS-M2C 913-C, IVECO 18-1811 S1

Required for various vehicle types from 2011. Backwards compatible and can be used without hesitation in older Ford vehicles from 7/1998. Also suitable for vehicles from various other manufacturers. Tested for use with turbochargers and catalytic converters. **Not suitable for VW with extended maintenance intervals (WVI)!**

1 l	6	2325 ¹³
5 l	4	2326 ¹³
20 l	1	3854 ⁷¹
60 l	1	3856 ³⁴
205 l	1	3857 ³⁴

**Special Tec LL 5W-30**

Especially suitable for Opel vehicles.

High-tech low-viscosity motor oil based on synthetic technology. With advanced wear-protection formula. Fastest cold-start oiling during starting and minimum friction during daily driving ensure an extremely long engine service life. Provides the ideal oil pressure under all operating conditions. Keeps oil consumption low. Exceeds the strict test requirements demanded by renowned manufacturers.

Specifications and approvals: ACEA A3, ACEA B4, API SL, BMW Longlife-01, MB-Approval 229.5, VW 502 00, VW 505 00

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Opel GM-LL-A-025, Opel GM-LL-B-025

All-year oil for gasoline and diesel engines. Ideal for Opel vehicles up to model year 2010. Tested safe with catalytic converters and turbochargers.

1 l	6	2447 ¹³
5 l	4	2448 ¹³
20 l	1	1194 ⁷¹
60 l	1	1195 ³⁴
205 l	1	1196 ³⁴

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

¹³ BOOKLET ³⁴ D-GB ⁷¹ D-GB-I-E-P ⁷⁵ D-GB-I-F-E-P-DK-FIN-N-S

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based



ENGINE OILS 4-STROKE CAR



5W-30

**Top Tec 4200 5W-30 New Generation**

High-tech low-friction motor oil based on synthetic technology. Outstanding protection against wear, reduces oil and fuel consumption and ensures fast oil penetration of the engine. Depending on the manufacturer's specifications, oil change intervals of up to 30,000 or 50,000 km or every 2 years for low mileage drivers are thus possible.

Specifications and approvals: ACEA C3, API SP, BMW Longlife-04, MB-Approval 229.31, MB-Approval 229.51, MB-Approval 229.52, Opel OV 040 1547 - G30 / OV 040 1547 - D30, Porsche C30, VW 504 00, VW 507 00

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: ACEA C2, BMW Longlife-01 (up to 2018)*, BMW Longlife-01 FE (up to 2018)*, Fiat 9.55535-S1, Fiat 9.55535-S3, GWM, HAVAL, VW 500 00, VW 501 01, VW 502 00, VW 503 00, VW 503 01, VW 505 00, VW 505 01, VW 506 00, VW 506 01 (With the exception of R5 and V10 TDI engines before 6/2006), Wuling, *limited to BMW gasoline engines without particle filters in the EU including Norway, Switzerland, Great Britain and Liechtenstein

Area of use

For gasoline and diesel engines that meet the Euro 4, Euro 5 and Euro 6 emission standards (including FSI, common rail and pumped jet injection). Also suitable for gas-driven vehicles (CNG/LPG) and vehicles with a diesel particulate filter (DPF), even if retrofitted. Exception: R5 and V10 TDI engines before manufacture year 06/2006. Tested for use with turbochargers and catalytic converters.

Cont.	Packaging Unit	Part no.
1 l	6	8972 ¹³
5 l	4	8973 ¹³
20 l	1	3708 ⁷¹
60 l	1	3709 ³⁴
205 l	1	3711 ³⁴

**Top Tec 4400 5W-30**

Especially suitable for Renault.

Latest generation high-tech low-viscosity motor oil based on synthetic technology. Prevents the build-up of harmful deposits and guarantees total engine power. Reduces oil thickening through particulate drag-in. Reduces oil consumption. Secures the functional performance of the diesel particulate filter (DPF) while ensuring the longest possible service life. Provides fast oiling of engine and turbocharger. Provides great lubrication security along with ideal wear protection. Guarantees maximum performance even with long oil-change intervals (up to 30,000 km).

Specifications and approvals: ACEA C4, Renault RN 0720

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Fiat 9.55535-S4, MB 226.51, MB 229.51

All-year oil for gasoline and diesel engines including common rail technology. Especially suitable for gas-powered vehicles (CNG/LPG) and vehicles with diesel particulate filters (DPF) – also for retrofits. Tested safe with catalytic converters and turbochargers.

5 l	4	2322 ¹³
20 l	1	3752 ⁷¹

**Top Tec 4410 5W-30**

Especially suitable for Renault.

High-tech low-friction motor oil based on synthetic technology. Prevents undesirable deposits, ensures reliable lubrication, maximum protection and the best performance. Enables fast penetration of the oil to the engine and turbocharger.

Specifications and approvals: ACEA C3, MB-Approval 226.52, Renault RN 17

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Renault RN 0700*, Renault RN 0710*, *except Renault Sport/Alpine

For all gasoline engines (except RS and Alpine), all diesel engines without DPF and diesel engines with DPF as of model year 2018. Suitable for turbochargers and catalytic converters.

1 l	6	21402 ¹³
5 l	4	21404 ¹³
20 l	1	21399 ²⁴⁷

**Top Tec 4500 5W-30**

Especially suitable for Mazda, Mitsubishi, Jaguar and Land Rover.

Latest generation high-tech low-viscosity motor oil based on synthetic technology. Secures maximum engine performance. Reduces fuel consumption in one of the toughest consumption tests in Europe (CEC-L-54-T-96/MB M 111) by more than 2.5 % as compared with the specified reference oil. With outstanding wear protection. Fastest cold-start oiling during starting and minimum friction during daily driving ensure an extremely long engine service life.

Specifications and approvals: ACEA C1, Jaguar / Land Rover STJLR.03.5005

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Ford WSS-M2C 934-B, JASO DL-1, Mazda, Mitsubishi

All-year oil for gasoline and diesel engines including common rail technology. Especially suitable for gas-powered vehicles (CNG/LPG) and vehicles with diesel particulate filters (DPF) – also for retrofits. Tested safe with catalytic converters and turbochargers.

1 l	6	2317 ¹³
5 l	4	2318 ¹³
20 l	1	3731 ⁷¹
60 l	1	3732 ³⁴

**Top Tec 4600 5W-30**

Suitable for gasoline vehicles and for diesel vehicles with and without particulate filter.

Modern motor oil for gasoline and diesel engines with and without diesel particulate filter (DPF) and exhaust gas turbocharging. The combination of unconventional basic oils using synthetic technology, together with the latest additive technology, guarantee a motor oil that provides exceptional protection against wear and reduces oil and fuel consumption, while ensuring that the engine is immediately supplied with oil. This product allows for oil change intervals of up to 40,000 km, depending on the manufacturer's specifications.

Specifications and approvals: ACEA C2, ACEA C3, API SN, BMW Longlife-04, MB-Approval 229.31, MB-Approval 229.51, MB-Approval 229.52, Opel OV 040 1547 - D30, VW 505 00, VW 505 01

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Fiat 9.55535-S3, Ford WSS-M2C 917-A, GM dexos2, GWM, HAVAL, Opel GM-LL-A-025, Opel GM-LL-B-025, Wuling

Optimum for modern gasoline and diesel engines with multi-valve technology, Valvetronic and turbo charging (with or without charge air cooling). Especially suitable where there are long intervals between oil changes and heavy duty engine requirements. Also suitable for gas-powered vehicles (CNG/LPG). Tested safe with catalytic converters and turbochargers.

1 l	6	2315 ¹³
5 l	4	2316 ¹³
20 l	1	3757 ⁷¹
60 l	1	3758 ³⁴
205 l	1	3759 ³⁴

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based

5W-40

**Leichtlauf HC7 5W-40**

First class, modern, low-friction engine oil for year-round use. The combination of unconventional hydrocracked-based base oils and the latest additive technology has provided an engine oil which is guaranteed to reduce oil and fuel consumption while providing for rapid oil penetration in the engine.

Specifications and approvals: ACEA A3, ACEA B4, API SN, BMW Longlife-98, MB-Approval 229.3, Porsche A40, VW 502 00, VW 505 00

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Opel GM-LL-A-025, Opel GM-LL-B-025, Renault RN 0700, Renault RN 0710

Area of use

Optimum for modern gasoline and diesel engines with multi-valve technology and turbocharging with and without charge air cooling, and for use in gas fuelled (CNG/LPG) passenger cars. Especially suitable where there are long intervals between changes and heavy duty engine requirements.

Cont.	Packaging Unit	Part no.
5 l	4	2309 ¹³
20 l	1	1378 ⁷¹
205 l	1	1385 ³⁴

**Leichtlauf High Tech 5W-40**

Suitable for gasoline vehicles and for diesel vehicles without particulate filter. Modern top class low-friction engine oil for all-season use in gasoline and diesel engines without diesel particulate filters (DPF). The combination of innovative base oils – based on synthesis technology and the latest additive technology – guarantees an engine oil that reduces oil and fuel consumption and that ensures fast lubrication of the engine. Depending on the manufacturer instructions, oil change intervals of up to 40,000 km are possible.

Specifications and approvals: ACEA A3, ACEA B4, API SP, BMW Longlife-01, MB-Approval 229.5, Peugeot Citroen (PSA) B71 2296, Porsche A40, Renault RN 0700, Renault RN 0710, VW 502 00, VW 505 00

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Chrysler MS-10725, Chrysler MS-10850, Fiat 9.55535-H2, Fiat 9.55535-M2, Fiat 9.55535-N2, Fiat 9.55535-Z2, GWM, HAVAL, Opel GM-LL-B-025, Peugeot Citroen (PSA) B71 2294

Ideally suited for modern gasoline and diesel engines with multivalve technology, turbocharger and with or without charge air cooling. Especially suitable where there are long intervals between changes and heavy duty engine requirements.

1 l	6	2327 ¹³
5 l	4	2328 ¹³
20 l	1	3867 ⁷¹
60 l	1	3868 ³⁴
205 l	1	3869 ³⁴

**Leichtlauf Performance 5W-40**

Low-friction motor oil for gasoline and diesel vehicles with and without diesel particulate filter (DPF). Protects against wear, reduces oil and fuel consumption and ensures fast oil penetration of the engine.

Specifications and approvals: ACEA C3

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: MB 229.31

For gasoline and diesel engines including common rail and pumped jet injection. Also suitable for gas-driven vehicles (CNG/LPG) and vehicles with a diesel particulate filter (DPF), even if retrofitted.

1 l	12	21367 ¹³
5 l	4	21368 ¹³
20 l	1	21369 ⁷⁵
205 l	1	21370 ³⁴

**Molygen New Generation 5W-40**

Low-viscosity high-tech low-friction motor oil with high shear stability. Combined with innovative additive technology and the special Molygen additive. Reliably prevents the formation of deposits, reduces frictional losses in the engine and provides optimum protection against wear. The results are savings in fuel and an extended service life for the engine.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: ACEA A3, ACEA B4, API SN, BMW Longlife-01 (up to 2018)*, Fiat 9.55535-H2, Fiat 9.55535-N2, Fiat 9.55535-Z2, GWM, HAVAL, MB 229.5, Opel GM-LL-B-025, Porsche A40, Renault RN 0700, Renault RN 0710, VW 502 00, VW 505 00

Best for modern gasoline and diesel engines with and without exhaust gas turbochargers. For the protection and value retention of the engine during long intervals between oil changes and with high loads.

1 l	12	8576 ¹³
4 l	4	8578 ¹³
5 l	4	8536 ¹³

**Special Tec AA 5W-40 Diesel**

Modern premium low-friction motor oil. Thanks to its combination of base oils based on synthetic technology and the latest additives, offers excellent protection against wear, reduces oil and fuel consumption, keeps the engine clean and ensures fast oil penetration of the engine.

Specifications and approvals: ACEA E9, API CK-4, Cummins CES 20086, Ford WSS-M2C 171-F1

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Caterpillar ECF-3, Chrysler MS-10902, Cummins CES 20081, Detroit Diesel DFS 93K222, Isuzu, JASO DH-2, Mack EOS-4.5, MB 228.31, Mitsubishi, MTU Typ 2.1, Nissan, Renault Trucks RLD-3, Toyota, Volvo VDS-4.5

Especially for Asian and American diesel pickups and diesel passenger cars. Especially suitable where there are long intervals between oil changes and heavy duty engine requirements.

1 l	6	21330 ²⁴⁷
5 l	4	21332 ²⁴⁷

**Synthoil High Tech 5W-40**

Provides a stable lubricating film.

Fully synthetic low-viscosity motor oil. Keeps oil consumption low. Guarantees maximum performance even with long oil-change intervals. Provides the ideal oil pressure under all operating conditions. Fast cold-start oiling provides excellent engine wear protection during the start and warm-up phase.

Specifications and approvals: ACEA A3, ACEA B4, API SN

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: BMW Longlife-98, MB 229.3, Porsche A40, VW 502 00, VW 505 00

All-year oil for gasoline and diesel engines. Tested safe with catalytic converters and turbochargers.

5 l	4	1856 ¹³
20 l	1	1308 ⁷¹



ENGINE OILS 4-STROKE CAR



5W-40

**Top Tec 4100 5W-40**

Low-friction motor oil based on synthetic technology. Outstanding protection against wear, reduces oil and fuel consumption and ensures fast oil penetration of the engine. Oil change intervals of up to 30,000 km are thus possible, depending on the manufacturer's specifications.

Specifications and approvals: ACEA C3, API SN, Ford WSS-M2C 917-A, MB-Approval 229.31, Porsche A40, VW 505 00, VW 505 01

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: BMW Longlife-04 (up to 2018), Fiat 9.55535-H2, Fiat 9.55535-M2, Fiat 9.55535-S2, GM dexos2, Renault RN 0700, Renault RN 0710

Area of use

For gasoline and diesel engines that meet the Euro 4, Euro 5 and Euro 6 emission standards (including common rail and pumped jet injection). Also suitable for gas-driven vehicles (CNG/LPG) and vehicles with a diesel particulate filter (DPF), even if retrofitted. Tested for use with turbochargers and catalytic converters.

Cont.	Packaging Unit	Part no.
1 l	6	9510 ¹³
5 l	4	9511 ¹³
20 l	1	3702 ⁷¹
60 l	1	3703 ³⁴
205 l	1	3704 ³⁴

**Top Tec 4110 5W-40**

High-tech low-friction motor oil based on synthetic technology. Prevents undesirable deposits, ensures reliable lubrication, maximum protection and the best performance. Enables fast penetration of the oil to the engine and turbocharger.

Specifications and approvals: ACEA C3, API SN, BMW Longlife-04, MB-Approval 229.31, MB-Approval 229.51, MB-Approval 229.52, Porsche C40, VW 511 00

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: GM dexos2, GWM, HAVAL, MB 226.5, Renault RN 0700, Renault RN 0710

For gasoline and diesel vehicles with and without a gasoline particulate filter (GPF) or diesel particulate filter (DPF) that meet the Euro 4, Euro 5 and Euro 6 emissions standards. Even if retrofitted. Tested for use with catalytic converters and turbochargers.

20 l	1	21480 ²⁴⁷
------	---	----------------------

5W-50

**Molygen 5W-50**

Specially developed high-performance, low-friction engine oil for year-round use. The combination of synthetic base oils and advanced additive technology as well as the special Molygen additive ensures that the engine oil is of low viscosity and has a high shear stability and reliably prevents the formation of deposits, significantly reducing frictional losses in the engine and providing the optimum protection from wear.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: ACEA A3, ACEA B3, API SJ, MB 229.1, VW 502 00, VW 505 00

Optimum for modern passenger vehicles with gasoline and diesel engines with multi-valve technology and turbochargers. For protection and value conservation of the engine during long intervals between oil changes and extreme engine requirements.

1 l	12	2542 ¹³
4 l	4	2543 ¹³

10W-40

**Leichtlauf Performance 10W-40**

Low-friction motor oil for gasoline and diesel engines, with and without exhaust gas turbocharging and charge air cooler. Protects against wear, reduces oil and fuel consumption and ensures fast oil penetration of the engine.

Specifications and approvals: ACEA A3, ACEA B3, API SL

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: MB 229.1

For gasoline and diesel engines with and without charge air cooling. Suitable for extended oil change intervals and high engine loads.

20 l	1	2537 ³⁴
60 l	1	2101 ³⁴
205 l	1	2102 ³⁴

**Molygen New Generation 10W-40**

High-performance, low-friction engine oil for year-round use. The combination of unconventional base oils and advanced additive technology as well as the special Molygen additive ensures that the motor oil is of low viscosity with a high shear stability and reliably prevents the formation of deposits, significantly reducing frictional losses in the engine and providing the optimum protection from wear. The results are savings in fuel and an extended service life for the engine.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: ACEA A3, ACEA B4, API SL, Fiat 9.55535-G2, GWM, HAVAL, MB 229.3, Peugeot Citroen (PSA) B71 2300, Renault RN 0700, Renault RN 0710, VW 501 01, VW 502 00, VW 505 00, Wuling

Best for modern gasoline and passenger vehicle diesel engines with and without exhaust-gas turbochargers. For the protection and value conservation of the engine during long intervals between oil changes and when there are extreme engine requirements.

1 l	12	9955 ¹³
5 l	4	21254 ³

**Super Leichtlauf 10W-40**

Low-friction motor oil based on synthetic technology. With modern wear protection additives and particularly good dirt suspending and cleaning properties. Prevents the formation of black sludge, keeps engine seals such as shaft sealing rings and valve stem seals flexible and ensures low oil consumption. Particularly suited for vehicles with high mileage.

Specifications and approvals: ACEA A3, ACEA B4, API SN, MB-Approval 229.3, VW 501 01, VW 505 00

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Fiat 9.55535-D2, Fiat 9.55535-G2, GWM, HAVAL, MB 229.1, Peugeot Citroen (PSA) B71 2300, Renault RN 0700, Renault RN 0710, Wuling

For year-round usage in gasoline and diesel engines. Tested for use with turbochargers and catalytic converters.

1 l	6	9503 ¹³
5 l	4	9505 ¹³
20 l	1	1304 ⁷¹
60 l	1	1302 ³⁴
205 l	1	1303 ³⁴

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based

10W-60

**Synthoil Race Tech GT1 10W-60**

Fully synthetic low-friction motor oil for sporty drivers and extreme operating conditions. Offers maximum lubrication reliability, optimum oil pressure and maximum wear protection through classic motor-sport viscosity. Maximum performance and high power reserve get you to the finish line faster and more safely.

Specifications and approvals: ACEA A3, ACEA B4, API SN

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Fiat 9.55535-H3

Area of use

Specially developed for motor sports. Suitable all year for gasoline and diesel engines under sporty use. Tested safe with catalytic converters and turbochargers.

Cont.	Packaging Unit	Part no.
1 l	6	8908 ¹³
5 l	4	8909 ¹³
20 l	1	1392 ⁷¹
60 l	1	1393 ³⁴

15W-40

**Formula Super 15W-40**

Mineral motor oil. Provides a stable lubricating film. Provides the ideal oil pressure under all operating conditions. High safety reserves under extreme loads.

Specifications and approvals: ACEA A2, B3, E2, API SJ, API CF-4, Allison C4, MIL-L 2104 E, MIL-L 46152 D, Volvo VDS

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Caterpillar TO-2, MAN 271, MB 228.1, MTU Typ 1

All-year oil for gasoline and diesel engines. Especially suitable for older vehicles - also with retrofit catalytic converter. Tested safe with catalytic converters and turbochargers.

1 l	6	1439 ²¹
5 l	4	1440 ²¹
20 l	1	1451 ³⁴
205 l	1	1443 ³⁴

**Touring High Tech 15W-40**

Especially suitable for vehicles with high mileage.

Mineral high-performance motor oil. Prevents the formation of oil sludge. Provides a stable lubricating film even under extreme operating conditions. With advanced wear-protection technology. Keeps engine gaskets such as the shaft seal and valve stem seals elastic and ensures low oil consumption. For vehicles with tried and tested engine technology.

Specifications and approvals: ACEA A3/B4, E2, API SL, API CG-4, Allison C4, Volvo VDS

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Caterpillar TO-2, Mack EO-L, MAN M 3275-1, MB 228.3, MB 229.1, MTU Typ 2, Peugeot Citroen (PSA) B71 2295

All-year oil for gasoline and diesel engines. Can be used on all vehicles without particulate filters - also in mixed fleets. Tested safe with catalytic converters and turbochargers.

20 l	1	1298 ⁷¹
60 l	1	1296 ³⁴

20W-50

**MoS₂ Low-Friction 20W-50**

Modern, year-round engine oil formulated from selected mineral base oils. The high additive content which includes the solid lubricant molybdenum disulphide (MoS₂) guarantees optimum lubrication under extreme running conditions and with long periods between oil changes.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: ACEA A3, ACEA B4, API SL

Engine oil for gasoline and diesel turbocharged engines. Especially suitable where there are long intervals between oil changes and extreme running conditions.

1 l	6	1220 ¹³
5 l	4	1212 ¹³
20 l	1	20795 ³⁴
205 l	1	1221 ³⁴

ENGINE OILS 2-STROKE UNIVERSAL

**2-Stroke Motor Oil**

High quality semi-synthetic 2-cycle motor oil for use in all 2-cycle engines. Secures the functional performance of the engine and ensures maximum service life. Self-mixing. Selected mineral and synthetic base oils combined with advanced additive technology facilitates residue-free combustion and keeps the engine clean. The engine is ideally protected from wear.

Specifications and approvals: API TC, ISO L-EGC, JASO FC, TISI (Thailand International Standards Institute)

For separate lubrication and gasoil lubrication in motorcycles, motor bicycles, lawnmowers, power saws and emergency power units. Mixing ratio up to 1:50.

250 ml	12	1051 ²¹
1 l	6	1052 ²¹

AUTOMATIC TRANSMISSION/STEERING GEAR OILS

**Dual Clutch Transmission Oil 8100**

High-performance oil based on HC synthetic base oils and a powerful combination of additives. Achieves excellent clutch performance through extremely shear stable viscosity index improvers, advanced anti-wear additives and stable friction modifiers. Also suitable for dual clutch transmissions, which have a common oil supply for clutch, synchronizer, gear set and hydraulic control.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: BMW 83 22 0 440 214, BMW 83 22 2 147 477, BMW 83 22 2 148 578, BMW 83 22 2 148 579, BMW 83 22 2 167 666, BMW DCTF-1, BMW DCTF-1+, BMW MTF LT-5, Chrysler, Ford WSS-M2C 218-A, Ford WSS-M2C 936-A, Jaguar / Land Rover GX73-M1R564-AA, MB 236.21, MB 236.24, Mitsubishi MZ320065 Dia-Queen SSTF-I, Nissan WSS-M2C 936-A, Peugeot Citroen (PSA) 9734.S2, Porsche 999.917.080.00, Volvo 1161838, Volvo 1161839, VW G 052 182, VW G 052 529, VW G 052 536, VW G 055 529, VW G 055 536, ZF TE-ML 11

For dual clutch transmissions of all types that require a special oil, such as VW, Seat, Škoda, Audi (direct shift gearbox), Ford, Mercedes-Benz (DCT), BMW, Volvo, etc.

1 l	6	3640 ⁷¹
5 l	4	20626 ⁷¹
20 l	1	3641 ⁷¹
60 l	1	3642 ³⁴

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

¹³ B00KLET ²¹ D ³⁴ D-GB ⁷¹ D-GB-I-E-P

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based





Steering Gear Oil 3100

Mineral hydraulic oil specifically developed based on the highest requirements demanded by Mercedes-Benz in accordance with the MB-approval 236.3 standard. Provides high thermal stability, ensuring ideal ageing resistance. Maximum wear protection and favorable friction behavior. Has outstanding low-temperature behavior. With increased corrosion-protection component proportion.

Specifications and approvals: Dexron II D, DTFR 38B100 (236.3), MB-Approval 236.3
LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: VW G 009 300, ZF TE-ML 03D, ZF TE-ML 04D, ZF TE-ML 09, ZF TE-ML 11, ZF TE-ML 14A, ZF TE-ML 17C

Area of use

Can be used in both mechanical steering systems and in power steering in numerous Mercedes-Benz vehicles. Use according to the aggregate or car and transmission manufacturer's prescribed specifications.

Cont.	Packaging Unit	Part no.
1 l	6	1145 ⁷¹



Top Tec ATF 1100

Synthetic technology automatic transmission oil from the latest generation with extremely high performance reserves. Provides high thermal stability, ensuring ideal ageing resistance. Excellent wear protection and favorable friction behavior. Greatest safety reserves through modern additive technology. With improved formula for long transmission life. Compatible with all sealing materials.

Specifications and approvals: Allison C4, Dexron III G, Dexron III H, Dexron TASA (Typ A/Suffix A), DTFR 13C100 (236.1), Ford Mercon, MAN 339 Typ L1, MAN 339 Typ V1, MAN 339 Typ Z1, MB-Approval 236.1, Voith H55.6335.XX (G 607), ZF TE-ML 03D, ZF TE-ML 04D, ZF TE-ML 14A, ZF TE-ML 17C, ZF approval number ZF004926

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Allison TES 389, Caterpillar TO-2, Ford ESP-M2C 166-H, MB 236.6, Volvo 97341, ZF TE-ML 02F, ZF TE-ML 09, ZF TE-ML 11A, ZF TE-ML 11B, ZF TE-ML 14B

For automatic transmissions, manual shift transmission, steering systems, hydraulic and lateral drives both in the passenger car and in the commercial vehicle sector. Use according to the aggregate or car and transmission manufacturer's prescribed specifications.

1 l	6	3651 ⁷¹
20 l	1	3653 ⁷¹



Top Tec ATF 1200

Synthetic technology automatic transmission oil of the latest generation. Prevents build-up of harmful deposits. Arrive at your destination faster and safer with maximum transmission performance and power reserves. Exceeds the highest test requirements demanded by renowned manufacturers. Ensures exact friction behavior and guarantees outstanding ageing resistance. Highest lubrication security under all conditions. Secures the functional performance of the aggregate and ensures long service life. With advanced wear-protection technology.

Specifications and approvals: Allison C4, Dexron III H, Ford Mercon V, Honda ATF Z1 (except CVT), Hyundai SP-II, Hyundai SP-III, JASO 1-A, Kia SP-II, Kia SP-III, Mazda ATF M-III, Mazda ATF M-V, Mitsubishi SP-II, Mitsubishi SP-III, Nissan AT-Matic D Fluid, Nissan AT-Matic J Fluid, Nissan AT-Matic K Fluid, Toyota Type T-II, Toyota Type T-IV

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Allison TES 295, BMW 7045 E, BMW 8072 B, BMW LA 2634, BMW LT 71141, Caterpillar TO-2, Chrysler ATF +3, Chrysler ATF +4, Daimler NAG-1, JWS 3309 (Aisin Warner), MAN 339 Typ V1, MAN 339 Typ Z1, MAN 339 Typ Z2, MB 236.2, MB 236.5, MB 236.6, MB 236.7, MB 236.9, MB 236.10, MB 236.11, MB 236.91, Subaru ATF, Voith H55.6335.XX (G 607), Volvo 97340, Volvo 97341, VW G 052 162, VW G 052 990, VW G 055 025, ZF TE-ML 02F, ZF TE-ML 03D, ZF TE-ML 04D, ZF TE-ML 05L, ZF TE-ML 09, ZF TE-ML 11A, ZF TE-ML 11B, ZF TE-ML 14A, ZF TE-ML 14B, ZF TE-ML 17C

For automatic transmissions, manual shift transmission, steering systems, hydraulic and lateral drives both in the car and in the commercial vehicle sector. Use according to the aggregate or car and transmission manufacturer's prescribed specifications.

1 l	6	3681 ⁷¹
5 l	4	3682 ⁷¹
20 l	1	3683 ⁷¹
205 l	1	3685 ³⁴



Top Tec ATF 1400

Synthetic technology automatic transmission oil from the latest generation with extremely high power reserves. Prevents the build-up of harmful deposits and permanently maintains transmission performance. Ensures optimal friction behavior and guarantees outstanding ageing resistance. Secures the functional performance of the aggregate and ensures the maximum service life. Exceeds the highest requirements specified by renowned vehicle and aggregate manufacturers.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Dodge CVTF+4, Dodge NS-2, Ford CVT23, Ford CVT30, Ford Mercon C, GM/Saturn DEX-CVT, Honda HCF2, Honda HMMF, Hyundai SP-CVT 1, Jeep CVTF+4, Jeep NS-2, Kia SP-CVT 1, MB 236.20, Mini Cooper (E2L 799), Mitsubishi CVTF-J1, Mitsubishi CVTF-J4, Nissan CMT NS-2 Fluid, Nissan CVT NS-3 Fluid, Subaru E-CVT, Subaru High Torque CVTF, Subaru Lineartronic CV-30, Subaru Lineartronic CVTF, Subaru Lineartronic CVTF II, Subaru NS-2, Suzuki CVT Green1, Suzuki CVT Green2, Suzuki NS-2, Suzuki TC, Toyota CVTF FE, Toyota TC, VW G 052 180, VW G 052 516

For latest generation CVT transmissions with steel thrust belt or traction chain. Proven and tested in Mercedes-Benz A-Class and B-Class transmissions, in Audi Multitronic transmissions and in numerous other vehicles. Comply with the vehicle or aggregate manufacturer's instructions.

1 l	6	3662 ⁷¹
20 l	1	3692 ⁷¹
60 l	1	20614 ³⁴



Top Tec ATF 1600

Synthetic technology automatic transmission oil from the latest generation with extremely high performance reserves. Excellent ageing stability. Secures maximum transmission performance. Ensures optimal friction behavior and guarantees outstanding ageing resistance. Even under the toughest conditions and during large temperature fluctuations, it provides flawless hydraulic gear functioning. Especially suitable for shifting problems. With improved formula for long transmission life. Enables extremely long oil change intervals.

Specifications and approvals: MB-Approval 236.14

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: MB 236.12

Developed for the latest Mercedes-Benz 7-speed automatic transmission generation and downward compatible to all older Mercedes-Benz 5-speed automatic transmissions. Comply with the vehicle or aggregate manufacturer's instructions.

1 l	6	3659 ⁷¹
5 l	4	21176 ⁷¹
20 l	1	3694 ⁷¹

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based



Top Tec ATF 1800

Low-viscosity high-performance oil of the new generation for automatic transmissions. It is based on synthesis technology with modern, high-performance additives. Aside from excellent ageing and oxidation stability, optimal shifting is guaranteed under all operating conditions thanks to the extremely high viscosity index. It enables long oil change intervals.

Specifications and approvals: Dexron VI, Ford Mercon LV

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Aisin Warner AW-1, BMW 83 22 0 142 516, BMW 83 22 2 152 426, BMW 83 22 2 289 720, BMW 83 22 2 305 396, BMW 83 22 2 305 397, BMW 83 22 2 355 599, BMW M-1375.4, Fiat 9.55550-AV5, Honda ATF 3.1, Hyundai SP-IV, Hyundai SP-IV-RR, Isuzu ATF WSI, JASO 1A-LV, JWS 3324 (Aisin Warner), Land Rover TYK 500050, Mazda ATF FZ, MB 236.12, MB 236.14, Mitsubishi Dia Queen ATF-MA1, Mitsubishi Dia Queen ATF-PA, Nissan AT-Matic S Fluid, Nissan Matic P, Toyota WS, VW G 055 005, VW G 055 162, VW G 055 540, VW G 060 162

Area of use

For automatic transmissions of various manufacturers such as Aisin Warner, ZF etc., which are installed in vehicles of Audi, BMW, Jaguar, Land Rover, Mercedes-Benz, Porsche, VW, Volvo etc. Meets further manufacturer requirements.

Cont.	Packaging Unit	Part no.
1 l	6	3687 ⁷¹
20 l	1	3688 ⁷¹
60 l	1	3689 ³⁴
205 l	1	20624 ³⁴



Top Tec ATF 1900

High-performance oil for automatic transmissions. It is based on selected basic oils and modern, high-performance additives. The low viscosity helps to reduce the fuel consumption and increases the efficiency. The excellent stability of the friction coefficient enables extended oil change intervals.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: MB 236.15

Developed for Mercedes-Benz 7-speed automatic transmissions of type 722.9 and 724.2 (hybrid).

1 l	6	3648 ⁷¹
20 l	1	3649 ⁷¹



Top Tec ATF 1950

ATF for ideal performance thanks to a premium combination of active agents. The lowered viscosity reduces consumption and increases efficiency. The outstanding stability of the friction coefficient enables extended oil change intervals.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: MB 236.17

For the new generation of the Mercedes-Benz 9-speed automatic transmissions, model 725.0/1.

1 l	6	21378 ²⁶³
20 l	1	21379 ¹³

MULTI-DISC CLUTCH/CENTRAL HYDRAULIC OILS



Central Hydraulic System Oil

LIQUI MOLY central hydraulic system oils meet the highest technical requirements and are suitable for a wide range of automotive applications. The carefully selected formulations made from the best raw materials ensure excellent temperature properties and guarantee the full function of the systems even at the lowest temperatures of up to -45 °C. All central hydraulic system oils are impressive thanks to excellent wear, aging and corrosion protection as well as optimum friction values and minimal foaming tendency.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: BMW 81 22 9 407 758, Fiat 9.55550-AG3, Ford WSS-M2C 204-A, MAN M 3289, MB 345.0, Opel 1940 766, VW G 002 000, VW G 004 000, ZF TE-ML 02K

This synthetic hydraulic fluid with ash-free additives is ideally suited for steering systems, electro-hydraulic convertible tops, level controls, hydropneumatic suspensions, damping systems, cab tilting devices, etc.

1 l	6	1127 ⁷¹
20 l	1	1147 ⁷¹



Multi-disc Clutch Oil

High-performance gear oil specially developed for Haldex all-wheel drive, Quattro and 4motion drives with excellent viscosity index as well as excellent shear stability and outstanding friction coefficient under all operating conditions. Protects reliably against wear, foaming and corrosion. Ensures optimum power transmission on all-wheel drive vehicles.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: GM, Opel, Volvo, VW G 052 175 (TL 52175), VW G 055 175 (TL 52175-X), VW G 060 175 (TL 52175-Y)

For all-wheel drive systems with Haldex couplings from Audi, Opel, Seat, Škoda, Volkswagen and Volvo.

1 l	6	21419 ⁷¹
-----	---	----------------------------



Central Hydraulic System Oil 2200

LIQUI MOLY central hydraulic system oils meet the highest technical requirements and are suitable for a wide range of automotive applications. The carefully selected formulations made from the best raw materials ensure excellent temperature properties and guarantee the full function of the systems even at the lowest temperatures of up to -45 °C. All central hydraulic system oils are impressive thanks to excellent wear, aging and corrosion protection as well as optimum friction values and minimal foaming tendency.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: MB 344.0

This semi-synthetic hydraulic fluid is specially adapted to the requirements of Mercedes-Benz and is primarily suitable for vehicles of types 203.2 and 210 with tandem pumps (common oil reservoir for steering and level control). The specifications and instructions from the assembly or vehicle manufacturer must be followed. Central hydraulic oil 2200 can also be used for refilling in systems. Optimum effect only when the product is used unmixed. The instructions of the vehicle/aggregate manufacturer are to be followed!

1 l	6	3664 ⁷¹
-----	---	---------------------------

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

¹³ B00KLET ³⁴ D-GB ⁷¹ D-GB-I-E-P ²⁶³ D-I-E-P

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based



MULTI-DISC CLUTCH/CENTRAL HYDRAULIC OILS

**Central Hydraulic System Oil 2300**

LIQUI MOLY central hydraulic system oils meet the highest technical requirements and are suitable for a wide range of automotive applications. The carefully selected formulations made from the best raw materials ensure excellent temperature properties and guarantee the full function of the systems even at the lowest temperatures of up to -45 °C. All central hydraulic system oils are impressive thanks to excellent wear, aging and corrosion protection as well as optimum friction values and minimal foaming tendency.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: MB 343.0

Area of use

Cont.

Packaging Unit

Part no.

1 l 6 3665 71

This mineral hydraulic fluid is specially adapted to the requirements of Mercedes-Benz and is suitable for systems such as level controls, hydro-pneumatic suspensions and ALD, 4Matic and soft top hydraulic systems.

**Central Hydraulic System Oil 2400**

LIQUI MOLY central hydraulic system oils meet the highest technical requirements and are suitable for a wide range of automotive applications. The carefully selected formulations made from the best raw materials ensure excellent temperature properties and guarantee the full function of the systems even at the lowest temperatures of up to -45 °C. All central hydraulic system oils are impressive thanks to excellent wear, aging and corrosion protection as well as optimum friction values and minimal foaming tendency.

Specifications and approvals: ISO 7308

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: IVECO 18-1823 Klasse 1, LHM-Plus, Peugeot Citroën (PSA) B71 2710

This mineral hydraulic fluid is specially adapted to the requirements of the Peugeot/Citroën PSA Group and is suitable for systems such as hydraulic brakes, level controls, steering systems, etc. Miscible with older, mineral LHM formulations. Depending on the manufacturer's specifications, also required in commercial vehicles for trailing axle lifting devices and cab tilting devices.

1 l 6 3666 71

**Central Hydraulic System Oil 2500**

LIQUI MOLY central hydraulic system oils meet the highest technical requirements and are suitable for a wide range of automotive applications. The carefully selected formulations made from the best raw materials ensure excellent temperature properties and guarantee the full function of the systems even at the lowest temperatures of up to -45 °C. All central hydraulic system oils are impressive thanks to excellent wear, aging and corrosion protection as well as optimum friction values and minimal foaming tendency.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: LDS, Peugeot Citroën (PSA) S71 2710, Renault PSF Class 1

This synthetic hydraulic fluid with ash-free additives is specially adapted to the requirements of the Peugeot/Citroën PSA Group and is suitable for systems such as hydraulic brakes, level controls, steering systems, etc. Depending on the manufacturer's specifications, also required in commercial vehicles for trailing axle lifting devices and cab tilting devices.

1 l 6 3667 71

MANUAL TRANSMISSION/HYPOID TRANSMISSION/TRANSFER CASE FLUIDS

**Top Tec Gear EV 510**

Synthetic gear oil with powerful additive components. Offers outstanding aging and oxidation stability and has an excellent pressure-absorption capability.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Tesla

For electric vehicle transmissions that require a lubricant with this performance level. This type of lubricant is used in various Tesla models, for example.

1 l 6 21702 71

**Top Tec MTF 5100 75W**

Low-viscosity high-performance transmission fluid. Thanks to excellent shear stability, offers high potential fuel savings and optimum wear protection. Ensures outstanding shifting comfort under all operating conditions thanks to the good viscosity-temperature properties.

Specifications and approvals: API GL4

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: BMW 83 22 7 533 818, BMW MTF LT-3, Fiat 9.55550-MZ6, Ford WSS-M2C 200-D2, Toyota, VW G 052 178, VW G 052 512, VW G 052 726, VW G 055 512, VW G 060 726, VW G 070 726

Used especially for manual and automated manual transmissions (DSG). Recommended particularly for use in vehicles from Audi, BMW, Fiat, Ford, Seat, Škoda, Volkswagen, etc.

1 l 6 20842 71
20 l 1 20843 34**Top Tec MTF 5200 75W-80**

Low-viscosity high-performance transmission fluid with excellent high pressure and wear protection properties. Multi-purpose. Reduces friction, lowers fuel consumption and emissions and ensures smooth shifting operations. The outstanding thermal and oxidative stability guarantees a clean transmission and a long oil service life.

Specifications and approvals: API GL4

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: BMW 83 22 0 309 031, BMW 83 22 0 403 247, BMW MTF LT-2, BMW MTF LT-4, Ford WSD-M2C 200-C, GM 1940764, GM 1940768, Nissan MT-XZ, Nissan MT-XZ TL (JR Type), Peugeot Citroën (PSA) B71 2330, Special Honda MTF-II, Toyota, Volvo 97308

Developed for use in transaxles, manual transmissions and transfer cases. Recommended particularly for BMW, Ford, GM/Opel, Honda, Nissan, Toyota/Peugeot/Citroën (PSA), Volvo and vehicles from other manufacturers.

1 l 6 20845 71
20 l 1 20846 71

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based



Top Tec MTF 5300 70W-75W

Fully synthetic, low-viscosity high-performance transmission fluid. Thanks to excellent shear stability, offers high potential fuel savings and optimum wear protection. Ensures outstanding shifting comfort under all operating conditions thanks to the good viscosity-temperature properties.

Specifications and approvals: API GL4

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: VW G 052 171, VW G 052 527

Area of use

Cont.

Packaging
Unit

Part
no.

Used especially for manual and automated manual transmissions (DSG). Recommended particularly for use in vehicles from Audi, Seat, Škoda and Volkswagen.

1 l	6	21359 ⁷¹
20 l	1	21360 ¹³



High Performance Gear Oil (GL3+) SAE 75W-80

Gear oil based on synthesis technology with extremely high performance reserves. Ensures exact friction behavior and provides outstanding ageing resistance. Exceeds the tough test requirements demanded by renowned manufacturers. Guarantees maximum performance even with long oil-change intervals. With advanced wear-protection technology. Enables smooth shifting.

Specifications and approvals: API GL3+

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: DAF, Eaton Extended Drain (300.000 km), IVECO, MAN 341 Typ E3, MAN 341 Typ Z3, Renault Trucks, Volvo 97305, ZF TE-ML 02D, ZF TE-ML 08

Universal use for the latest manual and transaxle transmissions. LIQUI MOLY recommends this product for vehicles from BMW, Mercedes-Benz, Opel and numerous other manufacturers. Comply with the vehicle or aggregate manufacturer's instructions.

1 l	6	4427 ⁷¹
20 l	1	4428 ⁷¹



High Performance Gear Oil (GL4+) SAE 75W-90

Full synthetic transmission oil. Ensures exact friction behavior and provides outstanding ageing resistance. Exceeds the tough test requirements demanded by renowned manufacturers. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless aggregate functioning. Greatest lubrication security, maximum wear protection through large viscosity bandwidth. Ensures easy shifting and smoothest running.

Specifications and approvals: API GL4+, Ford ESD-M2C 175-A

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: VW 501 50 (G50), ZF TE-ML 08

Universal use for the latest manual and transaxle transmissions. LIQUI MOLY recommends this product for vehicles from Audi, Ford EU, the VW-Group and numerous other manufacturers. Comply with the vehicle or aggregate manufacturer's instructions.

1 l	6	4434 ⁷¹
20 l	1	4435 ⁷¹
60 l	1	4436 ³⁴



Gear Oil (GL5) 75W-80

Semi-synthetic gear oil with extremely high performance reserves. Ensures exact friction behavior and provides outstanding ageing resistance. Has outstanding low-temperature behavior. Exceeds the tough test requirements demanded by renowned manufacturers. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless aggregate functioning. Provides great lubrication security along with ideal wear protection. Enables smooth shifting.

Specifications and approvals: API GL5, MIL-L 2105 C

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Peugeot Citroen (PSA) B71 2315, Peugeot Citroen (PSA) B71 2330

For the latest manual and transaxle transmissions – especially from Citroën and Peugeot. Comply with the vehicle or aggregate manufacturer's instructions.

1 l	6	3658 ⁷¹
-----	---	--------------------



Fully Synthetic Gear Oil (GL5) SAE 75W-90

Full synthetic transmission oil. Ensures exact friction behavior and provides outstanding ageing resistance. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless aggregate functioning. Greatest lubrication security, maximum wear protection through large viscosity bandwidth. Facilitates easy shifting and smoothest running.

Specifications and approvals: API GL5, MIL-L 2105 C, MIL-L 2105 D

For highly stressed manual and auxiliary transmissions – especially for modern transaxle systems and axle drives without limited-slip differentials. Comply with the vehicle or aggregate manufacturer's instructions.

1 l	6	1414 ⁷¹
20 l	1	1415 ⁷¹



Fully Synthetic Hypoid Gear Oil (GL5) LS SAE 75W-140

Full synthetic hypoid transmission oil with extremely high performance reserves. Ensures exact friction behavior and provides outstanding ageing resistance. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless aggregate functioning. Greatest lubrication security, maximum wear protection through large viscosity bandwidth. Reduces transmission noise. Enables maximum oil change intervals.

Specifications and approvals: API GL5

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: BMW rear-axle gear oil, Ford WSL-M2C 192-A, Scania STO 1:0, VME, ZF TE-ML 05D, ZF TE-ML 12D, ZF TE-ML 16G, ZF TE-ML 21D

For highly stressed axle drives with and without limited-slip differentials – especially for vehicles in which the aggregate or vehicle manufacturer specifies oil with Limited Slip additives (LS). Perfectly suitable for motorsports. Comply with the vehicle or aggregate manufacturer's instructions. LIQUI MOLY recommends this product especially for BMW axle drives.

1 l	6	4421 ⁷¹
20 l	1	4422 ³⁴

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

¹³ B00KLET ³⁴ D-GB ⁷¹ D-GB-I-E-P

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based



21



Fully Synthetic Hypoid Gear Oil (GL4/5) 75W-90

Fully synthetic hypoid gear oil with extremely high performance reserves. Exceeds the highest test requirements of well-known vehicle manufacturers. Ensures assemblies function perfectly, even under extreme operating conditions and when exposed to large temperature fluctuations. Offers high lubrication reliability and optimal wear protection. Has excellent low temperature behavior, reduces transmission noise and enables very long oil change intervals.

Specifications and approvals: API GL4, API GL5, API MT-1

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: BMW 83 22 2 365 987, BMW Synthetic OSP, MB 235.8, MIL-PRF 2105 E, SAE J 2360, Volvo 97312, ZF TE-ML 02B, ZF TE-ML 05A, ZF TE-ML 12L, ZF TE-ML 12N, ZF TE-ML 16F, ZF TE-ML 17B, ZF TE-ML 19C, ZF TE-ML 21A

Area of use

Universal gear oil for manual, auxiliary and differential transmissions without locking differential. Note the vehicle or unit manufacturer's instructions!

Cont.	Packaging Unit	Part no.
1 l	6	1024 ⁷¹



Hypoid Gear Oil (GL5) SAE 85W-90

Mineral low-viscosity hypoid gear oil. For vehicles with tried and tested transmission technology. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless aggregate functioning. Provides a stable lubricating film. Provides great lubrication security along with ideal wear protection.

Specifications and approvals: API GL5, DTFR 12B100 (235.0), MB-Approval 235.0, MIL-L 2105 D, ZF TE-ML 16C, ZF TE-ML 17B, ZF TE-ML 19B, ZF TE-ML 21A, ZF approval number ZF000695

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: MAN 342 Typ M1

For highly stressed vehicle transmissions without limited-slip differentials, especially axle drives with hypoid gears. Comply with the vehicle or aggregate manufacturer's instructions.

1 l	6	1035 ⁷¹
20 l	1	1047 ⁷¹
60 l	1	1031 ³⁴



Hypoid Gear Oil (GL5) LS SAE 85W-90

Mineral low-viscosity hypoid gear oil. For vehicles with tried and tested transmission technology. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless aggregate functioning. Provides a stable lubricating film. Provides great lubrication security along with ideal wear protection. Outstanding viscosity temperature behavior.

Specifications and approvals: API GL5, MIL-L 2105 D

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: DAF, GM B 40 1010, Volvo (Axles/limited slip differential), Volvo 97311, ZF TE-ML 05C, ZF TE-ML 21C

For highly stressed axle drives with and without limited-slip differentials – especially for vehicles in which the aggregate or vehicle manufacturer specifies oil with Limited Slip additives (LS). Comply with the vehicle or aggregate manufacturer's instructions.

1 l	6	1410 ⁷¹
20 l	1	4706 ³⁴



Hypoid Gear Oil (GL5) SAE 85W-140

Mineral low-viscosity hypoid gear oil. For vehicles with tried and tested transmission technology. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless aggregate functioning. Greatest lubrication security, maximum wear protection through large viscosity bandwidth. Outstanding viscosity temperature behavior. Reduces transmission noise.

Specifications and approvals: API GL5, MIL-L 2105 D, ZF TE-ML 16D, ZF TE-ML 21A, ZF approval number ZF005974

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: MIL-L 2105 C

For highly stressed vehicle transmissions without limited-slip differentials, especially axle drives with hypoid gears. Comply with the vehicle or aggregate manufacturer's instructions.

20 l	1	1027 ⁷¹
------	---	--------------------



Hypoid Gear Oil (GL4/5) TDL SAE 75W-90

Semi-synthetic hypoid gear oil with extremely high performance reserves. Excellent ageing stability. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless aggregate functioning. Minimizes wear. Outstanding viscosity temperature behavior. Enables long oil change intervals.

Specifications and approvals: API GL4, API GL5, API MT-1

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: DAF, Eaton, MAN M 3343 Typ M, Scania ST0 1:0, ZF TE-ML 02B, ZF TE-ML 08, ZF TE-ML 16B, ZF TE-ML 17B, ZF TE-ML 19B

Specifically developed for use in commercial vehicles. Universal use TDL oil (total drive line) for shift, auxiliary and differential transmissions without limited-slip differentials. Comply with the vehicle or aggregate manufacturer's instructions.

1 l	6	1407 ⁷¹
-----	---	--------------------

HYDRAULIC OILS



Hydraulic Oil HLP 46

Mineral hydraulic oil with the classification type HLP acc. to DIN 51524 Part 2. Contains select agents to improve the aging resistance in the wear and corrosion protection as well as the EP properties. Ideally suited in systems in which high thermal loads may arise.

Specifications and approvals: Hydrauliköl DIN 51524 Teil 2 HLP 46

For machines, pumps and plants. Comply with the machine and plant manufacturer's operating instructions. Viscosity ISO VG 46

20 l	1	1110 ⁷¹
------	---	--------------------

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based

Battery greases

**Battery Clamp Grease Spray**

Special lime soap-based grease which is compatible with plastics. Protects battery terminals and electrical contacts from corrosion and oxidation. For reliable starting as well as bright lights and longer battery life. Prevents acid damage, has good compatibility with plastics and prevents leakage currents. Prevents the contact resistance from increasing during operation and ensures lower loss than with untreated contacts. Labeling according to DIN 51502 M2C-30. Operating temperature range: -30 °C to +60 °C.

Area of use

Especially for battery terminals and connections along with plug connectors in vehicle electronics.

Cont.

Packaging
UnitPart
no.

300 ml	6	3141 ⁷¹
--------	---	--------------------

Multipurpose greases

**Multipurpose Grease**

Lithium soap grease for use in slide and roller bearing lubrication under normal loads and at normal to high temperatures. Wide temperature range and good water resistance. That makes it suitable as a universal grease for the automotive sector and for general machine lubrication. Good long-term lubrication is ensured by the carefully selected raw materials and additives. Designation acc DIN 51502 K2K-20. Service temperature: -25 °C to +120 °C. Intermittent up to +130 °C.

Suitable as universal lubricating grease in the automotive, construction, agricultural machinery and industrial sector. Note manufacturer's instructions.

400 g	12	3552 ⁷¹
25 kg	1	3555 ³⁴

**Lubricant Fix**

Lubricant Fix is an exceptionally adhesive, water resistant, special paste with a wide range of applications. It provides outstanding protection from wear, corrosion and oxidation and prevents creaking and squeaking. Extremely adhesive, reduces friction, is resistant to hot water and seawater. Labeling according to DIN 51502 KP2G-30. Operating temperature range: -30 °C to 110 °C.

For general use in the workshop, industrial, house, hobby, garden areas, etc. For reliable lubrication of bearings, sliding guides, seat rails, sunroofs, door locks.

50 g	12	1080 ²¹
------	----	--------------------

**Silicone Grease Transparent**

Lubricant with diverse application areas at all temperatures. With outstanding separation and lubrication properties, e.g. for metal/plastic pairings, high resistance to oxidation and low tendency to evaporate. It is resistant to both cold and hot water, resistant to aging and temperature stable, it seals out contamination and can be delivered by centralized lubrication systems. Can be used in slightly acidic or slightly alkaline areas. Also suitable for lubricating roller and plain bearings with low bearing pressures. Labeling according to DIN 51502 KS12 S-40. Operating temperature range: -40 °C to +200 °C

For lubricating sunroofs, seat rails, door hinges, rods, etc.

100 g	12	3312 ³⁸
-------	----	--------------------

Special greases

**LM 47 Long-Life Grease + MoS₂**

High-grade special grease. The MoS₂ content provides the selected base grease with outstanding lubricity and high-performance properties that normal grease simply does not have. During operation, a permanently adhering, ultra-thin molybdenum disulfide film forms at the sliding surfaces. This film retains its lubrication properties for a long time even after the grease supply completely fails. Extremely long-lasting lubrication properties, can be delivered by central lubrication systems. Labeling according to DIN 51502 KPF2K-30. Operating temperature range: -30 °C to +120 °C, short term up to +130 °C.

For installation, maintenance and repair of vehicles, tools, construction, agricultural and printing machines. For highly stressed bearings and joints, splined shafts, threads and guides. For constant-velocity drive joints.

400 g	12	3520 ⁷¹
1 kg	4	3530 ⁷¹

**LM 50 Litho HT**

Squeeze-stable, water resistant, oxidation and corrosion resistant high performance lithium complex soap grease. Can be used everywhere. Guarantees very good wear protection and high-pressure absorbance capacity. Designation acc DIN 51502 KP2N-30. Service temperature: -30 °C to +140 °C. Intermittent up to +180 °C.

For lubrication of high-load bearing plain and roller bearings such as wheel bearings or greased industrial transmissions.

400 g	12	3406 ⁵¹
-------	----	--------------------

**Truck Lubricating Grease KP2K-30**

For roller and plain bearings. Under difficult conditions, extreme loads, dusty and moist conditions. Contains highly effective additives for corrosion and oxidation protection as well as EP additives that ensure the best possible lubrication, even under extreme conditions and high pressures. The grease is able to absorb a large amount of water without losses in performance. Operating temperature range: -30 °C to +120 °C. Intermittent up to +130 °C. Pay attention to the manufacturer's instructions. Labeling according to DIN 51502: KP2K-30.

Specially developed for commercial vehicles, construction machinery and machines and equipment used for agriculture and forestry.

Lube Shuttle	400 g	20	3347 ⁷¹
--------------	-------	----	--------------------



PASTES



Brake pastes

**Brake Anti-Squeal Paste (can with brush)**

A special synthetic lubricant for the brake system. Extremely adherent, resistant to road salt and splash water. Prevents and eliminates squealing noises that occur between brake caliper pistons or contact points and the brake lining. Secures the function of the entire brake system and prevents seizing or rust freezing of the rims on the wheel hub. Operating temperature range: -40 °C to +1200 °C.

Area of use

For the entire brake system at disk brake pads, studs, pins as well as contact points for drum brakes. Separating paste for centering rings on aluminum rims, connection points between rims and wheel hubs and other plugged and screwed connections.

Cont.	Packaging Unit	Part no.
200 ml	6	3074 ⁷⁰

**Copper Paste**

Copper Paste is used for the highest temperatures in threaded connections and contact surfaces that are exposed to high pressures and corrosive influences such as compressor and turbine screws, exhaust bolts, sparkplug threads. Application range - 35 °C to +1100 °C.

For lubrication and as corrosion protection for thermally highly stressed connections. Chemical and petrochemical industry, electric power plants, ceramic industry, machines and vehicle manufacturing. Here especially in threaded connections to exhaust manifolds, mufflers, chassis parts.

250 g	6	3081 ⁷¹
-------	---	--------------------

**Copper Spray**

Release agent and lubricant made from ultra-fine copper particles for use with machine elements subject to high thermal stress. Makes dismantling easy after long running times. Is used for screw connections and interfaces exposed to high temperatures, high pressures and corrosive elements. Operating temperature range: -30 °C to +1,100 °C

For lubrication and corrosion protection of connections subject to high thermal stress in the chemical and petrochemical industries, power stations, the ceramics industry, engineering and vehicle construction, particularly for screw connections on exhaust manifolds, silencers, chassis components.

250 ml	12	1520 ⁶⁹
--------	----	--------------------

Tailpipe pastes

**Exhaust Assembly Paste**

For permanently sealing exhaust parts. Heat resistant. Simple, fast application. For professional installation of exhaust systems. Installed pipes do not seize up and can be easily removed. Service temperature range up to approx. +700 °C.

For gas-tight installation of exhaust systems, tailpipe trim, screw and plug connections and flame rings.

150 g	6	3342 ⁷¹
-------	---	--------------------

Special pastes

**LM 48 Installation Paste**

High-performance tungsten disulfide paste for heavy-duty applications. Adheres even to apparently smooth surfaces. Applied to bearings and slide guides, prevents running-in damage and seizing marks when assembling components with tight pairings. With a synergistically active solid lubricant system with a zinc sulfide, graphite, fluorides and tungsten disulfide base. Operating temperature range: -35 °C to +450 °C

For assembly, repair and maintenance in all technical areas. For basic and lifetime lubrication of joints and small components.

50 g	12	3010 ²¹
1 kg	4	4096 ⁷⁷

**LM 49 Fluid Paste**

Thixotropic combination of lubricants developed from commercially available MoS₂ solid lubricant pastes. Outstandingly easy to use and therefore specially suitable for the workshop. Provides spontaneous adherence, highest pressure absorption capacity, good corrosion protection, universal application, quick and easy application, economy and emergency running properties.

Used for assembly, repairs and maintenance in all engineering applications. Especially suitable for use in maintenance and repair work.

500 g	4	3060 ⁷¹
-------	---	--------------------

**Tire Fitting Paste white**

For fast and easy mounting and removal. Ensures very good slide action. Chemically neutral to rubber and metal. Prevents creep of the tire on rim. Improves the leak-proofness of tubeless tires. Easy on the skin and nontoxic. Sparing application.

For fitting all standard wheel/tire combinations for passenger cars, trucks, agricultural machinery, two-wheel vehicles. Especially suitable for run-flat tires.

5 kg	1	3021 ⁷¹
------	---	--------------------

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based



Vehicle care

VEHICLE CARE

Paint	26
Glass	27
Rims/tires	28
Top	28
Interior	29
Plastic	29
Rubber	30
Engine	30
Winter products	30



Insect Remover

For fast, effortless insect remnant removal. For glass, plastic, paint and chrome. Gently and quickly softens insect soiling. Also perfectly suitable for pretreating before washing cars. Highly effective and biologically degradable.

Area of use

Especially for the windowpanes, chrome parts, headlights and paint surfaces. Suitable before machine car brush washing.

Cont.	Packaging Unit	Part no.
500 ml	6	1543 ⁷¹



Tar Remover

Highly effective solvent combination to remove sap and tar spots on automobiles, campers, motorcycles, bicycles, tools, etc. Tuned for high efficiency and paint compatibility.

For cleaning tar soil on all kinds of vehicles, e.g., for removing tar, asphalt, grease stains and fresh paint stains. Do not use on polycarbonate plastics and acrylic glass.

400 ml	6	1600 ⁴³
--------	---	--------------------



Car Wash & Wax

For rapid paintwork care for intermediate use. Maintains, protects and restores the luster in one go. Effortlessly removes dirt and leaves no lime deposits. Facilitates leathering and enhances the vehicle's appearance by increasing the luster. Offers reliable protection against weathering and aggressive environmental influences.

Suitable for all paint surfaces.

1 l	6	1542 ⁷¹
-----	---	--------------------



Car Washing Sponge

Especially absorbent – gentle on the paint. Durable and tough.

For glass, paint and plastic.

1 Piece	12	1549 ²¹
---------	----	--------------------



Scratch Stop

Silicone oil-free, universal grinding paste. The product is suitable for the removal of scratches, paint mist, traces of grinding and orange-peel surface on colored and metallic paints. The product is suitable for manual and mechanical treatment.

Specially developed product for the removal of scratches. Suitable for colored and metallic paints. Ideally suited for treating matt/dull plastic windows or headlamp lenses made of polycarbonate.

200 ml	12	2320 ⁴⁷
--------	----	--------------------



Paint Cleaner

Removes tar, dirt, grease spots and flash rust. Cleans and polishes. Brings back the original color depth. Equalizes slight scratches. Removes soiling and weathered paint particles. Cleans and smooths out the paints. When finished, the paint should be treated with LIQUI MOLY-Hard Wax. Suitable for polishers.

Especially for non-ferrous and metallic paints from dull to extremely weathered paint finishes.

500 ml	6	1486 ⁷¹
--------	---	--------------------



Quick Detailer

Highly effective gloss sealing spray with innovative protective formula. For quick, simple paintwork care without polishing. Removes light soiling such as dust or water spots and gives the paintwork a radiant deep sheen. Seals smooth paintwork for several weeks and provides an excellent water repellent effect and long-lasting protection against aggressive environmental influences. With a pleasantly fruity mango scent.

For the care and protection of smooth paintwork on motor vehicles, commercial vehicles, two-wheeled vehicles and boats. Can also be used on smooth plastic surfaces as well as steel and aluminum rims.

500 ml	6	21611 ³⁴
--------	---	---------------------



Paint Polishing Cream

Cleans, polishes and protects. For radiant gloss through carnauba wax. Offers outstanding protection against damaging environments. Evens out small hairline scratches and restores the finish gloss. Provides the paint with deep gloss. The original appearance of matt paintwork is easily restored. Its creamy consistency means sparing use.

Area of use

Cont.

Packaging
UnitPart
no.

For both new and slightly weathered colored and metallic paints.

300 g 6 1532 ²¹



Gloss Spray Wax

Wax with good cleaning action and outstanding luster. Slight road dirt and greasy soiling are easily and quickly removed without causing scratching. The super-easy polishing (like wiping off dust) produces a smooth finish with high gloss and very good color depth on all paints and dye types. The resulting protective layer equalizes slight scratches and preserves the paint against weather-related influences.

Outstanding paint care for in-between. Ideal paint finish sealing against weather influences. For non-ferrous and metallic paints, new or correspondingly prepared plus fast treatment of new vehicles as well as used vehicles in showrooms.

400 ml 6 1647 ⁷¹



Insect Removal Sponge

Easily and gently removes insects and dirt from glass, paint and plastic. Thoroughly and without scratches. With two different material sides.

For glass, paint and plastic.

1 Piece 12 1548 ²¹



Car Wash Shampoo

For a thorough car wash. Gentle on paint and makes it gleam brilliantly. With wash-active agents removes dust and oily or greasy contaminants without trace. Biologically degradable.

For thorough and gentle paint finish cleaning.

1 l 6 1545 ⁷¹
20 l 1 7509 ²¹



Polishing Microfiber Cloth

High-quality, long-fiber, particularly fluffy microfiber cloth for lint-free polishing out and wiping off of care products and polishing residues. Reliably absorbs wax and polish residues and ensures a brilliant deep sheen without streaks, smudges or cloudiness. Borderless due to a special weaving process to avoid scratches on sensitive surfaces. Washable and therefore extremely long-lasting.

For polishing out and wiping off care products and polishing residues on all sensitive surfaces. Also very well suited as a drying aid after washing the vehicle.

1 Piece 6 20649 ²¹



Gloss Waxing Shampoo

Effective, multi-functional and pH-neutral quick-dispersing shampoo concentrate for washing vehicles by hand, and contains mild, skin-friendly, paintwork-friendly tensides and a high proportion of care ingredients. Washing, product care and drying are all made in a single procedure. The water film disperses immediately after rinsing, which helps stain-free drying of the vehicle. Among other applications, Gloss Waxing Shampoo is ideal for showrooms and general care, as previously applied polish and sealing products are not removed. The paintwork receives a high-gloss finish with long-lasting preservation and is thus protected against aggressive environmental influences.

For cleaning all materials in commercial motor vehicles, motorbikes, boats, mobile homes, garden furniture etc., including paintwork, chrome, rubber, plastic and glass.

10 l 1 8198 ²¹

GLASS



Insect Remover

For fast, effortless insect remnant removal. For glass, plastic, paint and chrome. Gently and quickly softens insect soiling. Also perfectly suitable for pretreating before washing cars. Highly effective and biologically degradable.

Especially for the windowpanes, chrome parts, headlights and paint surfaces. Suitable before machine car brush washing.

500 ml 6 1543 ⁷¹



Insect Removal Sponge

Easily and gently removes insects and dirt from glass, paint and plastic. Thoroughly and without scratches. With two different material sides.

For glass, paint and plastic.

1 Piece 12 1548 ²¹

GLASS

**Windshield Cleaner Foam**

Highly effective foam cleaner. Ensures glare-free vehicle windows and good visibility. Dissolves and removes silicone, nicotine, insects, and oily and greasy residues. Suitable for polycarbonate and does not attack rubber, paints or plastics.

Area of use

For internal and external cleaning of vehicle windows, particularly after window repairs. Also suitable for mirrors and headlights in the passenger car and commercial vehicle sector as well as for windows, mirrors, etc. in the household and in trade.

Cont.	Packaging Unit	Part no.
300 ml	12	1512 ⁷¹

**Windshield Super-Concentrated Cleaner citrus**

Creates clear, streak-free vision in seconds. Removes oil and silicone coatings and insect contamination. Does not react with plastics, rubber or paint and is thus also suitable for vehicles with headlamp washers and plastic lenses made of polycarbonate. Phosphate-free and biodegradable. Dosage 1:100.

For summer operation of all passenger and commercial vehicle windshield washer units. Also suitable for fan nozzles as well as for LED and xenon headlamps and clear-glass style plastic lenses made of polycarbonate.

50 ml	40	1517 ²¹
250 ml	6	1519 ³⁴

**Windshield Cleaner Compact**

Tab for cleaning windshields.

For windscreen washer systems in both winter and summer use.

1 Piece	24	6925 ⁸⁸
---------	----	--------------------

RIMS/TIRES

**Special Rim Cleaner**

With dirt indicator.

For gentle and intensive cleaning of all aluminum and steel rims. Prevents stubborn re-soiling. Periodic rim care gives your rims luster and secures long service life. The rims will look like new. Effortlessly cleans and removes brake dust and other dirt. Special Rim Cleaner is highly biodegradable. Acid free.

Especially for caring for, cleaning and maintaining the value of all kinds of rims. Also perfectly suitable before using the carwash. Do not use on hot rims or in direct sunlight.

1 l	6	1597 ⁷¹
-----	---	--------------------

**Tire Bright Foam**

Cleans, maintains and protects tires in a single operation. Optically enhances weathered tire walls and gives them back their original appearance and suppleness.

For cleaning, maintaining and protecting tires. Do not use on hot, chrome-plated or magnesium rims. Not suitable for two-wheeled vehicles.

400 ml	6	1609 ⁷¹
--------	---	--------------------

**Tire Fitting Paste white**

For fast and easy mounting and removal. Ensures very good slide action. Chemically neutral to rubber and metal. Prevents creep of the tire on rim. Improves the leak-proofness of tubeless tires. Easy on the skin and nontoxic. Sparing application.

For fitting all standard wheel/tire combinations for passenger cars, trucks, agricultural machinery, two-wheel vehicles. Especially suitable for run-flat tires.

5 kg	1	3021 ⁷¹
------	---	--------------------

TOP

**Fabric Impregnation**

For optimal moisture protection. The fabric remains supple and breathable. Protects from stain formation caused by oil, grease and dirt. Silicon-free.

Universal use for textile convertible tops, backpacks, awnings, tents, sports clothes, sunshades. Also suitable for products with climate membrane and suede.

400 ml	6	1594 ⁶⁹
--------	---	--------------------



Speed Air Freshener sport fresh

Promotes sporty fresh air. Open the bag and hang the air freshener in a suitable place. The effect lasts for several weeks.

Area of use

Passenger and heavy-goods vehicle interiors.

Cont.

1 Piece

Packaging Unit

25

Part no.

1664⁸⁹



Speed Air Freshener lemon

Promotes sporty fresh air. Open the bag and hang the air freshener in a suitable place. The effect lasts for several weeks.

Passenger and heavy-goods vehicle interiors.

1 Piece

25

1661⁸⁹



Car Interior Cleaner

Cleaning liquid for intensive, gentle and fast cleaning of plastic parts and fabrics and trims in the vehicle interior. Thoroughly removes oil, grease, nicotine and other soiling. Especially suitable for removing beverage and candy leftovers and nicotine residue.

Eliminates dirt in the entire vehicle interior. Do not use on hot surfaces or in direct sunlight.

500 ml

6

1547⁷¹



Cockpit Bright

Renews dull and weathered plastic. The plastic parts regain their original appearance and do not dry out. Prevents bothersome creaking and squeaking noises. Cares without greasing, is antistatic and dust-repellent. Good lubrication action on rubber and plastic parts, impregnates and insulates, general use. Contains silicon.

On squeaking and creaking dashboards, for stiff seatbelts (spray belts on both sides). For all matt plastics such as plastic bumpers, spoilers, etc. For general interior care in automobiles.

600 ml

12

1610⁷¹



Leather Care

High-quality emulsion for the care and cleaning of smooth and imitation leather. Preserves structure, grip and elasticity of the leather and protects against dirt and wear. Smooths older as well as slightly worn leather surfaces and gives them a silky matt shine. Regular application enhances the appearance of the leather, prevents premature fading and extends the life of the material. Without dyes. Suitable for all leather tones.

For all leather surfaces in the automotive sector, leather suits and leather components in the home, for hobbies and at work. Not suitable for suede leather.

250 ml

6

1554⁷¹



Upholstery Foam Cleaner

Active foam cleaner for fast, gentle removal of dirt from upholstery, velour, carpets and vehicle coverings. Refreshes upholstery colors so they look like new. With allergy-free citrus fragrance.

For the cleaning of upholstery, carpets, velours, vehicle coverings, textiles etc.

300 ml

12

1539⁷⁰

PLASTIC



Plastic Deep Treatment

Cleans, maintains and protects all plastic and rubber parts and freshens them up. Deep penetration into the plastic ensures long-lasting action. Acts antistatic and dirt repellent. For a silky gloss. Also perfectly suitable for plastics in the house, hobby and garden area. Contains silicon.

Especially for maintaining and protecting all plastic finishes in the automotive sector, campers, boats, sports articles and household. For indoors and outdoors.

500 ml

6

1536⁷¹

PLASTIC



“Like new” Plastic Care

Protects, maintains and improves the appearance of extremely faded plastic parts on the vehicle exterior. Ensures comprehensive plastics processing in a single operation. Provides optimum protection against aggressive environmental influences and UV radiation. Contains silicone.

Area of use	Cont.	Packaging Unit	Part no.
For all plastics in the exterior automotive sector.	250 ml	6	1552 ⁷¹

RUBBER



Rubber Care

Maintains, cleans and beautifies door, window and trunk seals and tires. Prevents freezing-up in winter. Keeps rubber parts elastic and extends the service life. Also ideally suited for maintaining and deep-cleaning car tires and rubber mats.

Especially for maintaining and protecting and treating rubber parts such as tires, door seals, mats etc. in the automotive sector.	500 ml	6	1538 ⁷¹
--	--------	---	--------------------

ENGINE



Carburetor Housing Cleaner

Special solvent mixture for fast and thorough removal of greasy soiling and deposits. Cleans without disassembly.

For degreasing and cleaning greasy soiling and deposits on carburetors and injection systems such as the housing, throttle valve, nozzles and holes. Interior and exterior.	400 ml	12	3325 ⁷¹
---	--------	----	--------------------

WINTER PRODUCTS



Windshield De-Icer

Special combination of active agents with ice-dissolving, cleaning properties. Quickly and gently removes ice and white frost from vehicle windows. Prevents immediate re-icing.

For all types of iced-up vehicle windows.	500 ml	6	6902 ²⁴⁸
---	--------	---	---------------------



Repair aids/ service products

REPAIR AIDS/SERVICE PRODUCTS

Brake fluids	32
Radiator antifreeze	32
Rust solvent/multipurpose	34
Exhaust assembly and repair	36
Air-conditioning	36
Cleaner/oil binder	37
Hand care	37

BRAKE FLUIDS

**Brake Fluid DOT 4**

Synthetic brake fluid based on glycol ethers, alkyl polyglycols and glycol ether esters. It contains inhibitors to prevent the corrosion of metallic brake components and to reduce oxidation at increased temperatures. The brake fluid has a high wet and dry boiling point, thus ensuring safe braking even after the absorption of some moisture over an extended period of use. Special moisture scavengers help to prevent against the formation of steam bubbles.

Specifications and approvals: FMVSS 116 DOT 3, FMVSS 116 DOT 4, ISO 4925 Class 3, ISO 4925 Class 4, SAE J 1703, SAE J 1704

Area of use

Exceptionally well-suited for use with all disk and drum brake systems, as well as vehicle clutch systems for which a synthetic brake fluid of this specification is prescribed. The brake fluid is also suitable for use in ABS brake systems.

Cont.	Packaging Unit	Part no.
250 ml	6	21155 ²¹
500 ml	6	21156 ³⁴
5 l	4	21158 ³⁴
20 l	1	21159 ⁷¹

**Brake Fluid DOT 4**

Synthetic brake fluid based on glycol ethers, alkyl poly glycols and glycol ether esters. It contains inhibitors to prevent the corrosion of metallic brake components and to reduce oxidation at increased temperatures. The brake fluid has a high wet and dry boiling point, thus ensuring safe braking even after the absorption of some moisture over an extended period of use. Special moisture scavengers help to prevent against the formation of steam bubbles.

Specifications and approvals: FMVSS 116 DOT 3, FMVSS 116 DOT 4, ISO 4925 Class 3, ISO 4925 Class 4, SAE J 1703, SAE J 1704

Ideally suited to use with all disk and drum brake systems, as well as motor vehicle clutch systems for which a synthetic brake fluid of this specification is prescribed. The brake fluid is also ideally suited to use in ABS brake systems.

500 ml	6	3085 ²⁴⁸
--------	---	---------------------

**Brake Fluid Racing**

Synthetic brake fluid for extreme operating conditions. It contains inhibitors to prevent the corrosion of metallic brake components and to reduce oxidation at increased temperatures. The brake fluid has an excellent wet and dry boiling point, thus ensuring safe braking even after the absorption of some moisture over an extended period of use. Special additives prevent the premature build-up of vapor bubbles.

Specifications and approvals: FMVSS 116 DOT 4, ISO 4925 Class 4, SAE J 1703, SAE J 1704

Exceptionally well suited for the use of all disk and drum brake systems, as well as clutch systems for which a synthetic brake fluid of this specification is prescribed. The brake fluid is also suitable for use in ABS brake systems.

250 ml	24	3679 ¹³⁵
500 ml	6	21172 ³⁴

**Brake Fluid DOT 5.1**

Synthetic brake fluid based on glycol ethers, alkyl polyglycols and polyglycol esters. It contains inhibitors to prevent the corrosion of metallic brake components and to reduce oxidation at increased temperatures. The brake fluid enjoys excellent wet and dry boiling points, thus guaranteeing safe braking even after the absorption of some moisture over an extended period of use. Special moisture scavengers help to minimize the formation of steam bubbles.

Specifications and approvals: FMVSS 116 DOT 3, FMVSS 116 DOT 4, FMVSS 116 DOT 5.1, ISO 4925 Class 3, ISO 4925 Class 4, ISO 4925 Class 5.1, SAE J 1703, SAE J 1704

Exceptionally well-suited for use with all disk and drum brake systems, as well as vehicle clutch systems for which a synthetic brake fluid of this specification is prescribed. The brake fluid is also ideally suited for use in ABS brake systems.

250 ml	6	21160 ²¹
--------	---	---------------------

**Brake Fluid SL6 DOT 4**

Synthetic brake fluid based on glycol ethers and their boric acid esters. Has a high boiling point and wet boiling point, thus ensuring safe braking even after the absorption of some moisture over an extended period of use.

Specifications and approvals: FMVSS 116 DOT 3, FMVSS 116 DOT 4, ISO 4925 Class 6, SAE J 1703, SAE J 1704

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Audi 501 14 (TL 766-Z), BMW QV 34 1, GM Europe GMW 3356, Seat 501 14 (TL 766-Z), Skoda 501 14 (TL 766-Z), VW 501 14 (TL 766-Z)

Ideally suited for use in motor vehicle hydraulic brake and clutch systems for which a synthetic brake fluid is prescribed. Ideal for vehicles equipped with safety systems such as ESP/DSC, ABS and/or ASR.

500 ml	6	21167 ²¹
--------	---	---------------------

RADIATOR ANTIFREEZE

**Battery Coolant EV 200**

Ready-to-use, specially developed coolant for indirect battery cooling. Based on OAT technology, with a low electrical conductance. Contains flux inhibitors to prevent damage caused by flux residues in the cooling system. Characterized by excellent corrosion protection for aluminum, ferrous and non-ferrous metals. Unlike water-based coolants, the formation of hydrogen in the cooling system through hydrolysis is reduced.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: BYD, Hyundai, Kia

For indirect battery cooling systems that require cooling media with reduced conductivity.

5 l	4	21745 ³⁴
20 l	1	21746 ³⁴

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.



Radiator Antifreeze KFS 11

Radiator antifreeze based on ethylene glycol. Combination of active agents formulated using a special selection of inhibitors based on hybrid technology. Provides outstanding protection against frost, corrosion and overheating, and does not contain amines, nitrites or phosphates. If mixed with water in the right ratio, ensures reliable vehicle performance all year round.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Alfa Romeo 9.55523, Audi TL-774 C = G11, Behr, BMW GS 94000, Chrysler MS-7170, Cummins 85T8-2, Deutz DQC CA-14, Fiat 9.55523, IVECO 18-1830, JI Case JIC-501, Lada/Avtovaz TTM VAZ 1.97.717-97, Lancia 9.55523, MAN 324 Typ NF, MB 325.0, MB 325.2, MTU MTL 5048, Opel/GM GME L 46014, Perkins, Porsche TL-774 C = G11, Saturn, Seat TL-774 C = G11, Skoda TL-774 C = G11, Tesla, Toyota Motor Corporation, Vauxhall GMEL1301, Volkswagen TL-774 C = G11, Volvo Cars 128 6083 / 002, Volvo Construction, Volvo Trucks

Area of use

For all cooling systems and engines, in particular aluminum high-performance engines in passenger cars (both with combustion engines as well as hybrid and battery electric vehicles), commercial vehicles, motorcycles, buses, agricultural and construction machinery as well as stationary engines and equipment that require cooling system protection of this quality.

Cont.	Packaging Unit	Part no.
1 l	6	21149 ²¹
5 l	4	21150 ⁷¹
20 l	1	21127 ⁷¹



Radiator Antifreeze KFS 12+

Radiator antifreeze based on ethylene glycol. Combination of active agents with an OAT inhibitor package specially developed for modern aluminum high-performance engines. Does not contain amines, borates, nitrites, phosphates or silicates and provides outstanding protection against frost, rust and overheating. If mixed with water in the right ratio, ensures reliable vehicle performance all year round.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: ADE, Aston Martin, Audi TL-774 D = G12, Audi TL-774 F = G12+, Behr, Bergen Engines 2.13.01, CASE New Holland MAT 3624, Caterpillar / MAK, Caterpillar GCM34, Caterpillar MWM 0199-99-2091/12, Chevrolet, Claas, Cummins CES 14439, Cummins CES 14603, Cummins IS series u N14, DAF74002, Detroit DFS93K217, Deutz DQC CB-14, Fendt, Fiat 9.55523, Ford WSS-M97 B44-D, Foton Q-FPT 2313005-2013, Great Wall, Hitachi, Irisbus Karosa, Isuzu, Jaguar CMR 8229, Jaguar / Land Rover STJLR.651.5003, Jenbacher TA 1000-2000, John Deere JDM H5, Kobelco, Komatsu 07.892 (2009), Land Rover, Lancia 9.55523, Leyland Trucks DW03245403, Liebherr MD1-36-130, Mack 014 GS 17009, MAN 324 Typ SNF, MAN B&G A/S, MAN B&W AG D36 5600, MAN Diesel & Turbo SE, Mazda MEZ MN 121 D, MB 325.3, Mitsubishi Heavy Industry (MHI), MTU MTL 5048, Opel/GM GMW 3420, Proton, Renault-Nissan Renault RNUR 41-01-001/-S Type D, Renault Trucks 41-01-001/-S Type D, Saab B040 1065, Santana Motors, Saturn, Seat TL-774 D = G12, Seat TL-774 F = G12+, Skoda TL-774 D = G12, Skoda TL-774 F = G12+, Skoda 61-0-0257, Suzuki, Tedom, Thermo King, Valtra, Van Hool, Vauxhall GMW 3420, Volkswagen Semt Pielstick, Volkswagen TL-774 D = G12, Volkswagen TL-774 F = G12+, Volvo Construction, Volvo Penta, Volvo Trucks, Wartsila 32-9011, Wartsila SAMC Diesel DLP799861, Waukesha, Yanmar

For all cooling systems and engines, in particular aluminum high-performance engines in passenger cars (both with combustion engines as well as hybrid vehicles and battery electric vehicles), commercial vehicles, motorcycles, buses, agricultural and construction machinery as well as stationary engines and equipment that require cooling system protection of this quality. Particularly suitable for engines of the latest generation.

1 l	6	21145 ³⁴
5 l	4	21146 ⁷¹
20 l	1	21138 ³⁴
200 l	1	21148 ³⁴



Radiator Antifreeze KFS 12++

Combination of active agents which is formulated using an ingenious selection of inhibitors based on hybrid technology. Offers outstanding protection against frost, corrosion and overheating across its entire engine service life. Amine-, borate-, nitrite- and phosphate-free radiator antifreeze based on ethylene glycol.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Audi TL-774 G = G12++, MAN 324 Typ Si-OAT, MB 325.5, Seat TL-774 G = G12++, Skoda TL-774 G = G12++, Volkswagen TL-774 G = G12++

For all cooling systems and engines in passenger cars (both with combustion engines as well as hybrid and battery electric vehicles), commercial vehicles, motorcycles, buses, agricultural and construction machinery as well as stationary engines and equipment that require cooling system protection of this quality. Especially for all-alloy engines in which a special aluminum protection is required at higher temperatures.

1 l	6	21134 ³⁴
5 l	4	21135 ⁷¹
20 l	1	21136 ⁷¹
60 l	1	21137 ³⁴
200 l	1	21304 ³⁴



Radiator Antifreeze KFS 13

Combination of active agents which is formulated using an ingenious selection of inhibitors based on hybrid technology. Offers outstanding protection against frost, corrosion and overheating across its entire engine service life. Amine-, borate-, nitrite- and phosphate-free radiator antifreeze based on ethylene glycol.








LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Audi TL-774 J = G13, Seat TL-774 J = G13, Skoda TL-774 J = G13, Volkswagen TL-774 J = G13








For all cooling systems and engines in passenger cars (both with combustion engines as well as hybrid and battery electric vehicles), commercial vehicles, motorcycles, buses, agricultural and construction machinery as well as stationary engines and equipment that require cooling system protection of this quality. Especially for all-alloy engines in which a special aluminum protection is required at higher temperatures.

1 l	6	21139 ³⁴
5 l	4	21140 ⁷¹
20 l	1	21141 ⁷¹

RUST SOLVENT/MULTIPURPOSE



		Area of use	Cont.	Packaging Unit	Part no.
	Ceramic Rust Solvent with Freeze-Shock Effect Rust solvent that effectively separates rusted parts from each other thanks to its extremely good penetration properties in combination with the lubricating effect of the ceramic particles. The freezing effect, which causes the metal parts to be loosened to shrink, additionally supports and accelerates this.	For freeing rusted and corroded metal parts such as screws, bolts and other moving parts.	300 ml	6	1641 ⁴³
	Rust Solvent XXL Frees seized bolts and nuts particularly quickly. Penetrates even the narrowest of openings. Infiltrates and dissolves rust.	Rusted-in and corroded metal parts like screws, bolts and other movable parts.	600 ml	12	1611 ⁷¹
	MoS₂-Rust Solvent Excellent lubricant for all moving parts. Penetrates even the tightest fits and infiltrates and dissolves rust. Prevents squeaking noises, corrosion as well as oxidation and keeps moving parts permanently smooth-running. Penetrates quickly and is neutral to most paints, metals, plastics and elastomers. Displaces water and ensures low friction values thanks to MoS ₂ solid lubricant.	Rusted-in and corroded metal parts like screws, bolts and other movable parts.	300 ml	12	1614 ⁷¹
	Multi-Spray Plus 7 Multi-functional spray with 7 performance benefits: 1. Suppresses moisture and starts wet motors. 2. Protects the electrical system and eliminates creep currents and short circuits. 3. Loosens rusted screws. 4. Keeps movable parts free and functional. 5. Protects against corrosion and oxidation. 6. Maintains rubber parts; no freezing-on. 7. Prevents squeaking noises. Does not attack plastics, paints, metals and wood.	Universal application in the areas of workshop, home, garden and industry. For hinges, rollers, locks, bolts, switches, handles, Bowden cables, vehicle antennas and much more. Maintains and protects the entire electrical system.	300 ml 500 ml	12 12	3304 ⁷¹ 3305 ⁴⁴
	LM 40 Multi-Purpose Spray Lubricates, cleans, loosens, protects and preserves. Keeps moving parts moving. Reaches even the most hidden lubrication points thanks to its excellent penetration properties. Loosens stubbornly rusted and burnt-on screws quickly. Infiltrates and removes dirt and stubborn oil and grease residues. Provides protection against rust and corrosion and protects chrome parts.	The multipurpose product for house, hobby, workshop, vehicle and industry. For hinges, rollers, locks, bolts, switches, handles, Bowden cables, vehicle antennas and much more.	400 ml	12	3391 ⁷¹
	Sealant Remover Stuck and baked-on seals are removed effortlessly in no time. Just spray on. Removes baked-on, hardened seals and adhesives on engines and machine components quickly and easily. Even adheres to vertical surfaces.	For the automotive sector, construction and agricultural machines and for industrial application.	300 ml	6	3623 ⁷¹
	Cold Spray Universal application for repair purposes and locating faults. Helps to insert structural components in extremely tight spaces and locate faults in electrical circuits caused by thermal overloading.	For inserting ball bearings, shafts and bushings in spaces as well as checking electrical components such as temperature sensors, circuit boards, etc.	400 ml	6	8916 ⁸⁰

		Area of use	Cont.	Packaging Unit	Part no.
	V-Belt Spray Special combination of active ingredients formulated for maintaining and increasing the efficiency and performance of V-belt drives on vehicle engines, compressors, pumps and all other drives with V-belts.	For V-belts made of leather, rubber, balata, hair, etc. Not suitable for flat belts.	400 ml	6	4085 ⁷⁰
	Leak Finder Spray Leak test fluid for detecting spots where gas and compressed air may escape. Locates leaks on tanks, pipes, hoses, screw joints, welding seams, flange connections and fittings. Water-soluble and biodegradable test fluid filled with environmentally friendly propellant. The product's high air bubble formation guarantees economic and reliable application.	For repair work on pneumatic brake systems and air conditioning units in trucks, cars and commercial vehicles. For locating leaks on tires, hoses and welding equipment. For test and maintenance work on compressed air and gas lines as well as plants in industry.	400 ml	6	3350 ⁷¹
	Fluorescent Leak Finder K Water-soluble leak detection fluid for locating water ingress and wind noises quickly and accurately in combination with an indicator lamp (UV flashlight). Rework or complaints following repairs can thus be avoided. Mixing ratio 1:10 – 1:500.	For locating ingress of water after repairs to glass or sliding roofs, accident repairs and for locating wind noises quickly and accurately. Also for locating defective or leaky cooling circuits with conventional radiator protectants (with the exception of "low conductivity" coolants).	50 ml	12	3339 ³⁴
	Air Flow Sensor Cleaner Special active solvent for fast and gentle cleaning of sensitive components of the air flow sensor in gasoline and diesel engines. The Cleaner also distinguishes itself by means of a very fast evaporation that is free of residues. A dirty hot wire or hot plate in the air flow sensor leads to incorrect readings for calculating the fuel/air mixture. The starting and idling properties of the vehicle are thus impaired, the engine performance is reduced and the fuel consumption increases.	Removes contaminants at the hot wire or the hot plate of air flow sensors. Suitable for use in gasoline and diesel engines.	200 ml	6	4066 ³⁸
	Tire Repair Spray Seals punctured tires and inflates them again. Do not use where tube ripped or where tire has slipped off the wheel or tire has been cut at the side. The tire can be subsequently repaired without problems.	First Aid for punctures for all common sizes of passenger car and caravan tires, with and without inner tube.	500 ml	6	3343 ⁷⁰
	Start Fix The reliable starting aid in cold or damp conditions, when the spark plugs are wet and battery charge is low. Consists of a combination of particularly highly flammable substances and is ideal for all gasoline and diesel engines. Helps combustion engines to start and is effective even at very low temperatures. Preserves the battery and is economic to use.	For all 2-stroke and 4-stroke gasoline and diesel engines in cars, trucks, buses, motorcycles, boats, construction machinery, tractors, lawnmowers, motor saws, etc.	200 ml	12	20768 ⁴³
	Door Lock Care Specifically developed for lubricating and maintaining installed lock barrels and ignition locks. Use this care spray to keep movable parts permanently free and to deice frozen door locks.	For lubricating, maintaining and de-icing door locks, door hinges and mechanical wing mirrors.	50 ml	24	1528 ²¹

RUST SOLVENT/MULTIPURPOSE

**Zinc Spray**

Top-grade primer with a zinc purity of 99 % with dried film. For subsequent painting work. Highly resistant and flexible and protects metal parts by means of electrochemical processes. Active corrosion protection, temperature resistant up to approx. 500 °C.

Area of use

As rust and corrosion protection on iron and steel surfaces, especially at welding seams. To repair damaged galvanic surfaces and to protect the entire exhaust system.

Cont.**Packaging Unit****Part no.**

400 ml 6 1540 ⁷¹

EXHAUST ASSEMBLY AND REPAIR

**Exhaust Assembly Paste**

For permanently sealing exhaust parts. Heat resistant. Simple, fast application. For professional installation of exhaust systems. Installed pipes do not seize up and can be easily removed. Service temperature range up to approx. +700 °C.

For gas-tight installation of exhaust systems, tailpipe trim, screw and plug connections and flame rings.

150 g 6 3342 ⁷¹

AIR-CONDITIONING

**A/C System Cleaner (Spray)**

Special cleaner for removing mold and bacteria simply and effectively from A/C systems without dismantling. Leaves behind a pleasantly fresh fragrance after cleaning. All service recommendations released by vehicle manufacturers regarding the cleaning of air conditioning systems are to be followed. **Use biocides safely. Always read the label and product information before use.**

Used for cleaning and disinfecting air conditioning systems in passenger motor vehicles and commercial vehicles. The product can also be used for domestic air conditioning systems.

250 ml 6 4087 ⁷¹

**A/C System Cleaner**

Special cleaner for removing mold and bacteria simply and effectively from A/C systems without dismantling. Leaves behind a pleasantly fresh fragrance after cleaning. All service recommendations released by vehicle manufacturers regarding the cleaning of air conditioning systems are to be followed. **Use biocides safely. Always read the label and product information before use.**

Used for cleaning and disinfecting air conditioning systems in passenger motor vehicles and commercial vehicles. The product can also be used for domestic air conditioning systems.

1 l 6 4091 ⁶²

**Klima Refresh**

Quickly frees the air conditioning of unpleasant odors that are caused by bacteria and mold in air conditioning systems, ventilation ducts or vehicle interiors. Simple to use without removal of the pollen or dust filter. Promotes a pleasantly fresh aroma.

For cleaning vehicle air conditioning systems and vehicle interiors. On vehicles with ionization device or ionizer, this function must be switched off before use.

75 ml 12 20000 ⁷¹

**2K A/C System Cleaner**

The cleaning fluid is comprised of two active components that are mixed for activation directly before use. Removes unpleasant odors from air conditioning systems without complicated removal work. Leaves behind a pleasant fragrance. To apply the cleaner, we recommend our A/C System cleaning gun (part no. 4090). Only for professional use.

For cleaning air conditioning systems in cars, commercial vehicles and private households.

1 Piece 1 9001 ⁵³

**PAG Air Conditioning Oil 46**

Fluorescent, fully synthetic air conditioning system oil based on polyalkylene glycol is highly compatible and miscible with R134a. Not suitable for refrigerant circuits that are filled with R1234yf refrigerant and not for hybrid and electric vehicles with electrically driven compressors. It meets the requirements placed by the prevailing air conditioning compressor manufacturers. Complies with ISO VG Class 46 acc DIN 51519.

Developed for air-conditioners filled with R134a. It is used to lubricate, seal and cool the sliding and rotating parts in the refrigerant circuit. Comply with the vehicle or compressor manufacturer's instructions.

250 ml 6 4083 ⁷¹

**PAG Air Conditioning Oil 150**

Fluorescent, fully synthetic air conditioning system oil based on polyalkylene glycol is highly compatible and miscible with R134a. Not suitable for refrigerant circuits that are filled with R1234yf refrigerant and not for hybrid and electric vehicles with electrically driven compressors. It meets the requirements placed by the prevailing air conditioning compressor manufacturers. Complies with ISO VG Class 150 acc DIN 51519.

Developed for air-conditioners filled with R134a. It is used to lubricate, seal and cool the sliding and rotating parts in the refrigerant circuit. Comply with the vehicle or compressor manufacturer's instructions.

250 ml 6 4082 ⁷¹



Oil & Chemical Binding Agents

High performance oil binder based on 100 % polyurethane rigid foam (PUR) in granulate form. Does not absorb water. Registered oil binder. Conforms to requirements for Types I, II and III/SF with R rating.

Area of use

For absorbing and binding oils, fuel and chemicals. For small and large internal and external surface area applications. 1 l of oil binder will bind approx. 0.6 l of oil.

Cont.	Packaging Unit	Part no.
25 l	1	7250 ⁷¹



Oil Spot Remover

Special agent for fast, effective removal of stubborn, environmentally harmful oil spots on workshop and garage floors, entrances, parking spots etc.

With oil spots on absorbent and non-absorbent surfaces such as asphalt, concrete, clinker, screed and ceramic.

400 ml	6	3315 ⁶⁹
--------	---	--------------------



Rapid Cleaner | Brake & Parts Cleaner (Spray)

Makes assembly work easier, cleaner and safer. Removes oil, grease and dirt quickly and completely. Parts treated will be completely free of residues and fully degreased afterwards. Saves time and money and guarantees trouble-free repair work. Removes resin, oil and grease residues. Has excellent penetration properties as well as controlled evaporation, free of residues.

Universal cleaner for rapid cleaning and degreasing of small components in the automotive and industrial sector. For brakes, clutches, transmissions, and for fitting and repair work. Removes oil and grease spots from floor coverings, materials and linings.

500 ml	12	3318 ⁷¹
--------	----	--------------------



Rapid Cleaner

Makes assembly work easier, cleaner and safer. Removes oil, grease and dirt quickly and completely. Parts treated will be completely free of residues and fully degreased afterwards. Saves time and money and guarantees trouble-free repair work. Removes resin, oil and grease residues. Has excellent penetration properties as well as controlled evaporation, free of residues.

Universal cleaner for rapid cleaning and degreasing of small components in the automotive and industrial sector. For brakes, clutches, transmissions, and for fitting and repair work. Removes oil and grease spots from floor coverings, materials and linings.

5 l	1	3319 ⁶⁹
20 l	1	21285 ¹³⁶
60 l	1	3333 ³⁴



Universal Cleaner

Concentrated universal cleaner that can be diluted with water for cleaning walls and floors as well as for use in high-pressure and spray appliances. Phosphate-free, silicate-free and solvent-free and biodegradable. Depending on the use mixing ratios up to 1:2,000.

Suitable for universal use in the home, the workshop and industry.

1 l	6	1653 ⁷¹
5 l	1	1654 ⁷¹
20 l	1	1655 ⁷¹

HAND CARE



Liquid Hand Cleaning Paste

For thorough and gentle cleaning of hands. Removes even stubborn contamination such as oils, greases, brake abrasion, tar, bitumen, paints, etc. without excessive stress on the skin. Consists to a large extent of renewable raw materials and contains only substances which protect the skin as well as natural abrasives made from finely ground corn cob meal. Dermatologically tested.

For cleaning dirty hands.

10 l	1	3354 ⁷¹
------	---	--------------------



Liquid Hand Cleaner


For thorough and gentle cleaning of hands. Removes even stubborn contamination such as oils, greases, brake abrasion, tar, bitumen, paints, etc. without excessive stress on the skin. Consists to a large extent of renewable raw materials and contains only substances which protect the skin as well as natural abrasives made from finely ground corn cob meal. Dermatologically tested.

For cleaning dirty hands.

3 l	6	3365 ⁶¹
-----	---	--------------------

HAND CARE



		Area of use	Cont.	Packaging Unit	Part no.
	Hand Cleaning Paste For thorough and gentle hand cleansing. Even removes stubborn soiling such as paint, oil and brake dust. Gentle on the skin and sparing in consumption. Dermatologically tested. Thoroughly rub into dry hands and rinse off. Best cleaning effect in connection with LIQUI MOLY Hand Care Cream (part no. 3358) and LIQUI MOLY Invisible Glove (part no. 3334).	For cleaning dirty hands.	12,5 l	1	3363 ⁶¹
	Invisible Glove Protects hands from stubborn soiling. "Invisible Glove" protects from oils and greases, soot, paints, glues, brake dust, primers, etc. Cares for the hands with elastin. Does not contain silicon; breathing. With easy-on-the-skin ph-value 5.5. Dermatological tested. Optimal when combined with LIQUI MOLY Liquid Hand Cleaning Paste (Part no. 3354).	For preventative protection against dirty hands.	650 ml	4	3334 ⁶¹
	Dispenser for Liquid Hand Cleaner Red dosing dispenser.	Dosing dispenser for LIQUI MOLY Liquid Hand Cleaner (part no. 3365).	1 Piece	1	3335 ²¹
	Wall Bracket for Liquid Hand Cleaner Painted metal wall bracket.	Wall bracket for LIQUI MOLY Liquid Hand Cleaner (part no. 3365).	1 Piece	1	3332 ²¹



Workshop Pro-Line

WORKSHOP PRO-LINE

Additives	40
Service products	41
JetClean	43

ADDITIVES



Oil additives



Pro-Line Engine Flush

Cleans the engine from the inside and removes deposits from oil holes, bearings, the piston ring area, etc. Reduces engine noise and oil consumption, improves compression and increases operating reliability of the vehicle. Allows the fresh oil to realize its full potential following an oil change.

Area of use

Suitable for all gasoline and diesel engines with and without a particulate filter (DPF/GPF). Ensures the perfect hydraulic function of oil-controlled systems such as VVT, VANOS and similar. Can be safely used in vehicles with toothed belt running in oil. 500 ml sufficient for up to 5 l of oil. Tested for use with catalytic converters and turbochargers.

Cont.	Packaging Unit	Part no.
500 ml	6	2427 ⁴³
5 l	3	2428 ³⁴



Pro-Line Visco-Plus

Reduces oil consumption. Keeps the viscosity of the motor stable. For constant oil pressure. Visco-Plus provides excellent protection against the oil's mechanical shearing loss even under the toughest conditions. Prevents motor oil thinning under frequent cold starts. The improved sealing of the moving engine parts reduces oil consumption. That makes it especially suitable for older cars. Reduces hydraulic valve lifter noise.

Suitable for all gasoline and diesel engines with and without diesel particulate filter (DPF). Can be mixed with all commercial motor oils. 1 l sufficient for up to 20 l oil volume.

1 l	6	5196 ⁷¹
-----	---	--------------------



Pro-Line Turbocharger Additive

Used for the initial filling of new turbochargers in order to protect them against dry running and damage caused by lack of oil after a change in the running-in phase. Improves the operational reliability of the new turbocharger.

Suitable for all turbochargers. Mixable with all motor oils.

20 g	12	20766 ²¹
------	----	---------------------

Fuel additives



Pro-Line Gasoline System Cleaner

Removes deposits on injection valves, intake valves, spark plugs and in the combustion chamber and prevents them from reforming. Improves engine running and optimizes the exhaust gas values. Eliminates start problems and rough engine running. Maintains and protects the entire fuel system from wear, deposits and corrosion. Clean engines need less fuel and reduce emissions.

Suitable for all gasoline engines. For adding directly to the fuel tank. Preventative during every inspection, after repairs to the fuel system, for solving problems and after every Jet-Clean cleaning. Can contents are sufficient for up to 70 l fuel.

500 ml	6	5153 ⁷¹
--------	---	--------------------



Pro-Line Super Diesel Additive K

With Cetane Plus for enhanced engine performance, less knocking, smoother running and easier starting. Cleans engine and injection systems and reduces seizing up and resinification of the injector needles. Guarantees optimal operation and energy-saving fuel-burning. Prevents corrosion and wear. Suitable for low-sulfur diesel fuels.

Suitable for all diesel engines with and without a diesel particulate filter. To be added directly into the fuel tank. Fully compatible with all conventional diesel and biodiesel fuels. 1 l is sufficient for 500 l of fuel (dosage 1:500). Mixing takes place automatically. Tested for compatibility with turbochargers.

20 l	1	2336 ³⁴
------	---	--------------------



Pro-Line Diesel System Cleaner

Reduces pollutant emissions, thus optimizing smoke opacity prior to emissions test. Successfully tested in international test bench analyses. Cleans injection nozzles, the entire fuel system and combustion chambers of any troublesome deposits. Prevents any seizing up and gumming up of nozzle needles. Optimizes the combustion process and restores the engine's original performance.

Suitable for all diesel and turbocharged diesel engines with and without diesel particulate filter (DPF). Contents are sufficient for max. 70 l of fuel.

500 ml	6	5156 ⁷¹
--------	---	--------------------



Pro-Line Direct Injection Cleaner

Modern fuel additive with polyetheramine technology. Thanks to the use of active PEA, achieves the greatest cleaning effect in the fuel system as well as excellent piston and combustion chamber cleanliness. Considerably reduces the risk for damage to the engine due to low-speed pre-ignition (LSPI).



Suitable for all passenger cars with 4-stroke gasoline engines. 120 ml can formulated for 30 – 50 l of fuel.

120 ml	6	21281 ³⁴
--------	---	---------------------





LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Opel 95527846, Opel 95527847, Opel 95599923

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

Radiator additives

	Area of use	Cont.	Packaging Unit	Part no.
 Pro-Line Radiator Cleaner Deposits in the cooling/heating system create blockages for heat exchange and they also block thermostat valves and control mechanisms. When engine temperatures are too high, the engine runs uneconomically and suffers excessive wear at considerable risk of damage. This concentrate safely removes deposits containing oil and lime and ensures that the engine runs reliably and at the optimum temperature. Does not contain aggressive acids or alkalis.	For all cooling water and heating systems. Compatible with all standard treating agents for coolants and antifreeze. 1 l sufficient for up to 50 l cooling water.	1 l	6	5189 ⁷¹
 Pro-Line Radiator Stop Leak K It's not easy to find small leaks caused by stone chipping, porous soldered connections or hairline cracks in the cooling system. Usually the only clue is in the reduced coolant. This dispersion completely seals this type of leaks immediately and safeguards the combustion chamber against damage caused by coolant ingress.	For radiator coolant and heating systems with and without water filters. Also suitable for aluminum and plastic radiators. 250 ml sufficient for up to 40 l of coolant. Compatible with all conventional coolant additives and antifreezes. Can also be used preventively.	250 ml	12	5178 ⁷¹

Service products

 Pro-Line Throttle Valve Cleaner Special active solvent for removing typical contamination and deposits found in the intake and throttle valve areas. Loosens and removes contamination such as oil, resin, glue, etc. Ensures the operability of all moving parts and increases the operational reliability of gasoline-powered engines.	For the intake and throttle valve area including nozzles and holes. Only suitable for use in gasoline engines.	400 ml	6	5111 ⁴³
 Pro-Line Intake System Cleaner Diesel Active solvent with highly effective additive combination. Eliminates contamination and deposits in the diesel intake and throttle valve area. Loosens and removes contamination such as oil, resin, soot, etc. Ensures the operability of all moving parts and increases the operational reliability of diesel engines.	For cleaning the entire intake system. Recommended for preventive use during the inspection. Only suitable for use in diesel engines.	400 ml	6	5168 ³⁴
 Pro-Line Diesel Particulate Filter Cleaner Highly effective fluid for cleaning clogged passenger car diesel particulate filters when installed. Dissolves hardened, dense and encrusted contaminants on the surface of diesel particulate filters. Secures optimum vehicle handling, engine performance and low fuel consumption. Regular cleaning in combination with flushing can help avoid expensive repairs.	For passenger car diesel engines with diesel particulate filter (DPF/FAP).	1 l	6	5169 ⁷¹
 Pro-Line Diesel Particulate Filter Purge For flushing passenger car diesel particulate filters (DPF/FAP) after cleaning with Pro-Line Diesel Particulate Filter Cleaner when installed. Flushes the soot softened by the cleaner and distributes this in the diesel particulate filter so that it can be burned off with normal regeneration. The cleaner is neutralized by the Purge. Regular cleaning in combination with flushing can help avoid expensive repairs.	For passenger car diesel engines with diesel particulate filter (DPF/FAP).	500 ml	6	5171 ⁷¹
 Pro-Line PTFE Powder Spray Grease-free lubricant and release agent based on PTFE (Teflon or polytetrafluoroethylene). Eliminates squeaking, creaking and stiffness and offers long-lasting protection against wear. The dry lubricant does not attract dirt or dust. Operating temperature range -40 °C to +250 °C.	For optimal lubrication of moving parts such as slide rails, joints, locking parts, belt mechanisms, etc. As a separating agent or to eliminate noise of coverings for almost all materials. Particularly suitable in areas where lubricants containing oil and silicone impair the finishing work.	400 ml	6	7384 ⁷¹



Pro-Line Ceramic Spray

Covers approx. 90 % of all standard spray applications. Lubricates, separates and protects against wear and corrosion. Offers outstanding resistance to hot and cold water as well as very good resistance to acids and alkalis. Separating effect up to 1,400 °C.

Area of use

For the lubrication of highly loaded sliding surfaces of all kinds e.g. screw, plug and bayonet connections of steel and non-ferrous metals. For the separation of temperature-stressed components e.g. of combustion engines, turbines and motor vehicle brake systems. Corrosion protection on screws, pins, bolts, flanges, spindles and fittings.

Cont.	Packaging Unit	Part no.
400 ml	6	7385 ⁷¹



Pro-Line Electronic Spray

Fully synthetic, plastic-compatible electronic spray for the cleaning and maintaining dirty electrical parts. The oxide and sulphide fittings are infiltrated, this reduces contact resistances, the electronic parts are protected and the operational safety ensured. The quick-drying formula leaves no residue and is silicone free. Note: Allow propellant to ventilate for approx. 10 min. Avoid sparking.

Used for the maintenance, care, cleaning and protection of all electrical components on the motor vehicle such as plug and terminal connections, lamp sockets, cable distribution boxes, switch elements, relays, ignition distributors, contact breakers, starters, alternators, fuses, battery terminals and antennae and for the lubrication of fine mechanical parts.

400 ml	6	7386 ⁷¹
--------	---	--------------------



Pro-Line Maintenance Spray, white

White, adherent, water-resistant high-performance lubricant. After the solvent evaporates, leaves behind a soft lubricant whose excellent stability in low and high temperatures allows it to be used in the toughest conditions. Protects all components ideally through reliable corrosion protection and good resistance to water.

For lubricating moving parts such as shafts, hinges, joints, pins, Bowden cables, slide rails, chains, springs, lock strikers, all fine mechanisms, spindles, guides, springs etc.

400 ml	6	7387 ⁷¹
--------	---	--------------------



Pro-Line Injector and Glow Plug Dismantling Aid

Heavy-duty solvent for seized injectors, glow and spark plugs. Undermines accumulated dirt and corrosion and enables easy removal. Outstanding cleaning properties allow stubborn oil residues, resinification and encrusted dirt to be removed easily.

For dismantling seized injectors, glow and spark plugs.

400 ml	6	3379 ⁷¹
--------	---	--------------------



Pro-Line Injector and Glow Plug Grease

Partly synthetic, metal-free special grease for lubricating injectors, spark and glow plugs before installation in the engine. Blocks the ingress of moisture and so prevents corrosion of the injector and glow plug. The special grease also makes disassembly much easier.

For the lubrication of all kinds of high-load sliding surfaces and separating components subject to heat stress such as injectors, spark and glow plugs, pins and bolts.

20 g	12	3381 ³⁴
------	----	--------------------



Pro-Line Tacky Lube Spray

High-grade synthetic, heat-resistant lubricant compound that is extremely adherent and resistant to acceleration forces. The solvent evaporates to leave behind an extremely adherent lubricating film. Uses its special formulation to ensure optimum corrosion protection and outstanding sealing properties. Offers the best possible protection for all components even under extreme conditions thanks to the high pressure absorption capacity and long-term effect.

For preventive periodic lubrication of components in the automotive and industrial sector, such as hinges, joints, linkages, relay levers, spindles, guides, slide rails, door bolts, bearings and spring balancers.

400 ml	6	7388 ⁷¹
--------	---	--------------------



Pro-Line Silicone Spray

Silicone-based release agent, lubricant and protective agent free of mineral oils and greases. Protects, lubricates, maintains and insulates. Does not stain. Has an anti-static effect. Eliminates squeaks, creaking and sluggishness. Offers long-lasting protection against wear. Versatile application, particularly in areas where oil or grease-based lubricants are not desired or would interfere with subsequent finishing work.

Versatile applications, e.g. on plastics, rubber, metal, wood, etc. Can be used as an assembly aid for hose connections and seals, for instance. For interior and exterior use.

400 ml	6	7389 ⁷¹
--------	---	--------------------



Pro-Line Rapid Rust Solvent

Extremely fast rust solvent with outstanding creep effect. Dissolves rust and dirt. Infiltrates and undermines moisture. Has excellent lubrication properties. Does not react with plastics, paints or metals.

Area of use

Suitable for the business and workshop as well as on vehicles and on all household and hobby appliances.

Cont.

Packaging
Unit

Part
no.

400 ml	6	7390 ⁷¹
--------	---	--------------------

JETCLEAN

Fuel system cleaning



Pro-Line JetClean Diesel Injection Cleaner

Highly concentrated, ready to use cleaning fluid. Removes deposits in the injection pump, on injection nozzles and in the combustion chamber and keeps them from forming again. Prevents jet needles from fusing and gumming. Improves engine running and optimizes the exhaust gas values. Eliminates starting problems, rough engine running, poor throttle response and power loss. Maintains and protects the entire fuel system from wear and corrosion. Clean engines need less fuel and reduce emissions.

For all diesel engines both with and without diesel particulate filters (DPF). For direct application via JetClean devices. In a preventative fashion at each inspection, after repairs to the fuel system or for treating problems. Turbocharger tested.

500 ml	6	5154 ⁷¹
1 l	6	5149 ⁷¹



Adhesives & sealants

ADHESIVES & SEALANTS	
Windshield repair	45
Sealants	45
Industrial adhesives	45
Corrosion protection	46
Underseal	47
Cavity protection	47

Separate products

**Glass Sealing Compound; can be dapped off**

Permanently tacky, easy to remove, non-hardening, non-paintable sealing compound.

Area of use

For sealing newly inserted rubber-cushioned windshields, rear and side windows between the rubber and glass and rubber and chassis.

Cont.

Packaging
UnitPart
no.

310 ml	12	6196 ⁶¹
--------	----	--------------------

SEALANTS

**Silicone Sealing Compound, black**

High-quality and easy-to-use silicone-based sealing compound. The automatic cartridge removes the need for a cartridge gun when processing. With outstanding resistance to cold, heat and aging. Stays permanently elastic and is resistant to chemicals, oils, etc. Can withstand temperatures from -40 °C to +250 °C (short periods up to +300 °C).

For sealing oil and transmission pans, engine housings, differentials, valve covers, water pumps, spur gear covers, headlamps, taillamps, battery boxes, etc. For metal parts, plastic and glass.

80 ml	12	6177 ⁴⁷
200 ml	6	6185 ⁶¹

**Silicone Sealing Compound, red**

High-quality and easy-to-use silicone-based sealing compound. The automatic cartridge removes the need for a cartridge gun when processing. With outstanding resistance to cold, heat and aging. Stays permanently elastic and is resistant to chemicals, oils, etc. Can withstand temperatures from -40 °C to 250 °C, short periods up to 300 °C.

For sealing oil and transmission pans, engine housings, differentials, valve covers, water pumps, spur gear covers, headlamps, taillamps, battery boxes, etc. For metal parts, plastic and glass.

80 ml	12	8948 ⁴⁷
-------	----	--------------------

**Silicone Sealing Compound, transparent**

High-quality and easy-to-use silicone-based sealing compound. The automatic cartridge removes the need for a cartridge gun when processing. With outstanding resistance to cold, heat and aging. Stays permanently elastic and is resistant to chemicals, oils, etc. Can withstand temperatures from -40 °C to 150 °C, short periods up to 250 °C.

For sealing oil and transmission pans, engine housings, differentials, valve covers, water pumps, spur gear covers, headlamps, taillamps, battery boxes, etc. For metal parts, plastic and glass.

200 ml	6	6184 ⁶¹
--------	---	--------------------

**Pipe Sealant**

Liquid thread sealant, durable and reliable. Resistant to fuel, oil and hydraulic fluids. Replaces hemp and pastes. Operating temperature range -60 °C to +150 °C. Can be dismantled.

For metallic threads up to max. R3" (M80). Suitable for hydraulic and pneumatic circuits such as braking systems and power steering. Not approved for domestic gas installations in Germany.

10 g	6	3808 ²¹
------	---	--------------------

INDUSTRIAL ADHESIVES

**Epoxy Adhesive**

2-component universal adhesive that cures fast at room temperature. Enables a hard, rigid adhesive bond or seal within just a few minutes. Ideal for bonding metal, wood, concrete, glass, fabric, ceramic, plastic and rubber to themselves and to each other. Also for sealing electronic parts and components.

Ideally suited for repairs, for bonding and insulation in car and vehicle construction, as well as for hobbies and in the household and garden. Replacement mixer (mixer tip with thread, part no. 6029).

25 ml	6	6183 ⁴³
-------	---	--------------------

**Liquimate 2-Component Power Adhesive**

High-strength, fast-curing 2-component methyl acrylate adhesive. For permanent high-performance bonding of various materials such as steel, aluminum, metals, heat-formable plastics, composite materials ABS, acrylics, PVC, GFRP, PC, PET, PU, etc. to themselves and to each other. Extremely impact and peel resistant and can be processed as required. Stable in the presence of gasoline, oil, mild acids and alkalis.

Universal adhesive for body and vehicle manufacture (e.g. bumper, radiator, lights, handles, console parts, spoiler, phone and speaker attachment). Replacement mixer (Mixer tip with thread, part no. 6029).

25 ml	6	6179 ³⁸
-------	---	--------------------

INDUSTRIAL ADHESIVES

**Bushing and Bearing Fixation**

High-strength, low-viscosity, oil-resistant dimethylacrylate ester-based adhesive which does not contain solvents and cures in the absence of oxygen. Operating temperature range: -60 °C to +150 °C.

Area of use

For attaching coaxial assembly parts such as bearings, bushings, shafts and hubs as well as for joining plastics and rubber/metal or metal/metal surfaces.

Cont.	Packaging Unit	Part no.
50 g	12	3807 ²¹

**Screw-Retainer High Strength**

Prevents screw connections from working loose and loosening due to vibration. Cures rapidly and reliably. Can be used on oiled surfaces. Seals threads and prevents leaks. Has good chemical resistance. Wide operating temperature range from -60 °C to +150 °C.

For all common nuts and screw sizes of all grades.

10 g	20	3803 ²¹
50 g	12	3804 ²¹

**Screw-Retainer Medium Strength**

Prevents screw connections from working loose. Resists loosening due to vibration. With a wide operating temperature range of -60 °C to +150 °C. Fast and reliable hardening. Can be used on oiled surfaces. Seals threads, prevents leaks and has good chemical resistance.

For all common nuts and screw sizes of all grades.

10 g	20	3801 ²¹
50 g	12	3802 ³⁸

**Instant Glue**

Single-component, solvent-free cyanoacrylate adhesive. Bonds various materials in seconds, cures extremely rapidly and has very high bond strength and heat resistance.

For bonding plastics, metals, wood, leather and rubber.

10 g	24	3805 ²¹
------	----	---------------------------

**Adhesive Body Spray**

Contact glue spray with high instant adhesion power.

For gluing fabrics, foam rubber, leather and artificial leather, fleece, cardboard etc. with each other or to rubber and metal. Also suitable for gluing PE foils in car doors.

400 ml	12	6192 ⁷⁰
--------	----	---------------------------

CORROSION PROTECTION

**Zinc Spray**

Top-grade primer with a zinc purity of 99 % with dried film. For subsequent painting work. Highly resistant and flexible and protects metal parts by means of electrochemical processes. Active corrosion protection, temperature resistant up to approx. 500 °C.

As rust and corrosion protection on iron and steel surfaces, especially at welding seams. To repair damaged galvanic surfaces and to protect the entire exhaust system.

400 ml	6	1540 ⁷¹
--------	---	---------------------------

**Weld Primer Spray**

Fast drying welding point sealant for inert gas and spot welding operations. The high impact strength allows long-lasting protection to be achieved. The product protects against corrosion between bodywork panels. Good filling capacity and excellent coverage.

For sealing welding points in automotive workshops, accident repairs, automotive construction, welding workshops and locksmith's shops.

400 ml	6	6000 ⁶⁹
--------	---	---------------------------



Stoneguard, black (Spray)

Stoneguard coating based on rubber and resins. Is distinguished by fast drying and ability to be painted over, provides abrasion-resistant corrosion protection, offers excellent protection against stone chipping and has sound-absorbing properties. After drying completely, a permanently elastic film remains. Can be painted over using commercially available paint systems and is easy to grind after drying.

Area of use

As stoneguard and corrosion protection on visible vehicle parts such as sills, rear and front facing panels as well as for chassis and body parts.

Cont.	Packaging Unit	Part no.
500 ml	12	6109 ⁷⁸



Underseal, black (Spray)

Stoneguard coating based on rubber and resins. Is distinguished by fast drying and ability to be painted over, provides abrasion-resistant corrosion protection, offers excellent protection against stone chipping and has sound-absorbing properties. After drying completely, a permanently elastic film remains. Can be painted over using commercially available paint systems and is easy to grind after drying.

For coating repaired parts such as fenders, wheel arches, underbodies, sills and front and rear aprons. For deadening wheel housings and for sealing and covering repaired spots.

500 ml	12	6113 ⁷⁸
--------	----	--------------------



Underseal, black

Stoneguard coating based on rubber and resins. Is distinguished by fast drying and ability to be painted over, provides abrasion-resistant corrosion protection, offers excellent protection against stone chipping and has sound-absorbing properties. After drying completely, a permanently elastic film remains. Can be painted over using commercially available paint systems and is easy to grind after drying.

For coating repaired parts such as fenders, wheel arches, underbodies, sills and front and rear aprons. For deadening wheel housings and for sealing and covering repaired spots.

1 l	12	6114 ⁷⁸
-----	----	--------------------

CAVITY PROTECTION



Cavity Protection, light brown (Spray)

Low viscosity corrosion inhibitor for cavity sealing. Water-repellent, with excellent penetration properties and "self-healing effect". Very finely atomized during spraying, has outstanding creep properties and penetrates well into narrow gaps which need protection (such as sheet metal folds). A slightly sticky wax coating remains after drying.

As corrosion protection coating of cavities on doors, hoods, crossmembers, reinforcements, etc. in passenger cars, commercial vehicles or as a universal corrosion protection product for machines, machine components and other tools.

500 ml	12	6107 ⁷⁸
--------	----	--------------------



Cavity Protection, light brown

Low viscosity corrosion inhibitor for cavity sealing. Water-repellent, with excellent penetration properties and "self-healing effect". Very finely atomized during spraying, has outstanding creep properties and penetrates well into narrow gaps which need protection (such as sheet metal folds). A slightly sticky wax coating remains after drying.

As corrosion protection coating of cavities on doors, hoods, crossmembers, reinforcements, etc. in passenger cars, commercial vehicles or as a universal corrosion protection product for machines, machine components and other tools.

1 l	12	6108 ⁷⁸
-----	----	--------------------



Cavity Protection, transparent

Low viscosity corrosion inhibitor for cavity sealing. Water-repellent, with excellent penetration properties and "self-healing effect". Very finely atomized during spraying, has outstanding creep properties and penetrates well into narrow gaps which need protection (such as sheet metal folds). A slightly sticky wax coating remains after drying.

As corrosion protection coating of cavities on doors, hoods, crossmembers, reinforcements, etc. in passenger cars, commercial vehicles or as a universal corrosion protection product for machines, machine components and other tools.

10 l	1	6118 ⁶¹
------	---	--------------------



Cable Grease (Spray)

High-quality lubricant for the preservation of wire cables. Thanks to its excellent corrosion protection, it is also suitable for cavity sealing and underfloor protection in the automotive sector. Complies with the following specifications and standards: Ö-Norm DSB 80, DIN EN 12385-8. Important: Product should always be stored and transported free of frost.

For preventive preservation of wire cables. Also suitable for the cavity sealing and underfloor protection of vehicles. Pay attention to the relevant manufacturer's instructions.

500 ml	12	6135 ⁷¹
--------	----	--------------------



Commercial Vehicles/ Construction and Mining Equipment

COMMERCIAL VEHICLES/CONSTRUCTION AND MI

Additives	49
Engine oils	49
Automatic transmission fluids	50
Gear oils	50
Greases/pastes	51
Vehicle care	51



Pro-Line Engine Flush

Cleans the engine from the inside and removes deposits from oil holes, bearings, the piston ring area, etc. Reduces engine noise and oil consumption, improves compression and increases operating reliability of the vehicle. Allows the fresh oil to realize its full potential following an oil change.

Area of use

Suitable for all gasoline and diesel engines with and without a particulate filter (DPF/GPF). Ensures the perfect hydraulic function of oil-controlled systems such as VVT, VANOS and similar. Can be safely used in vehicles with toothed belt running in oil. 500 ml sufficient for up to 5 l of oil. Tested for use with catalytic converters and turbochargers.

Cont.	Packaging Unit	Part no.
500 ml	6	2427 ⁴³
5 l	3	2428 ³⁴



Super Diesel Additive

Removes deposits in the diesel injection system and in the combustion chamber and prevents new deposits. Maintains all components of the diesel injection system. Prevents any seizing up and gumming up of nozzle needles. Boosts the cetane number, improves the ignition performance of the diesel fuel and ensures smooth engine running. Protects the entire fuel system against corrosion and wear. Optimizes the emission test values and the performance of the engine. Clean engines use less fuel and reduce the pollutant emissions.

Suitable for all diesel engines with and without a diesel particulate filter. Preventive or remedial. Fully compatible with all conventional diesel and biodiesel fuels. 250 ml is sufficient for up to 75 l of fuel (dosage 1:300). Effect remains for up to 2,000 km. Tested for compatibility with turbochargers.

250 ml	20	1806 ¹⁵²
--------	----	---------------------



Anti-bacterial Diesel additive

Highly effective biocide with wide action spectrum against bacteria, yeasts and moulds. For preventive use in diesel-powered vehicles that have been decommissioned for a long time or are in low use such as construction machinery, commercial vehicles, motorhomes, passenger cars, storage tankers etc. and for sterilizing already infested tank systems. **Use biocides safely. Always read the label and product information before use.**

For all diesel engines both with and without diesel particulate filters – as a preventative measure or to deal with problems. Turbocharger tested. For adding directly to the fuel tank. Perfectly compatible with all conventional diesel and biodiesel fuels. One filling of the dispenser 25 ml (integrated in the cap) is sufficient during preventative use for 25 l fuel (dosage 1 : 1000) and for using during problems for 5 l fuel (dosage 1:200).

1 l	6	21317 ²⁶⁶
-----	---	----------------------



Pro-Line Super Diesel Additive K

With Cetane Plus for enhanced engine performance, less knocking, smoother running and easier starting. Cleans engine and injection systems and reduces seizing up and resinification of the injector needles. Guarantees optimal operation and energy-saving fuel-burning. Prevents corrosion and wear. Suitable for low-sulfur diesel fuels.

Suitable for all diesel engines with and without a diesel particulate filter. To be added directly into the fuel tank. Fully compatible with all conventional diesel and biodiesel fuels. 1 l is sufficient for 500 l of fuel (dosage 1:500). Mixing takes place automatically. Tested for compatibility with turbochargers.

20 l	1	2336 ³⁴
------	---	--------------------

ENGINE OILS

10W-40



Top Tec Truck 4050 10W-40

Synthetic technology low-friction motor oil in combination with the latest additives. High-performance, economical and covers the maximum range of vehicles. Even under critical operating conditions, it assures optimum oil pressure and a stable lubricating film. Allows longer oil change intervals. Reduces oil consumption. Exceeds even the highest test requirements of well-known vehicle manufacturers. Assures reliable operation and maximizes the service life of the diesel particulate filter (DPF).

Specifications and approvals: ACEA E6, ACEA E7, ACEA E9, API CK-4, Deutz DQC IV-18 LA, Mack EOS-4.5, MB-Approval 228.51, Renault Trucks RGD, Renault Trucks RLD-3, Renault Trucks RXD, Volvo VDS-4.5

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Caterpillar ECF-1-a, Caterpillar ECF-3, Cummins CES 20076, Cummins CES 20077, Cummins CES 20086, DAF HP2, Deutz DQC IV-10 LA, Mack EO-M Plus, Mack EO-N, MAN M 3271-1, MAN M 3477, MB 226.9, MTU Typ 3.1, Scania Low Ash, Volvo CNG, Volvo VDS-3

Specially designed for high-load commercial vehicle diesel engines in compliance with the Euro IV, Euro V and Euro VI emissions standard with exhaust aftertreatment system and soot particle filter (DPF/CRT). It is backwards compatible and can also sometimes be used in older commercial vehicles in compliance with the Euro II and Euro III emissions standard when unmixed.

20 l	1	3794 ⁷¹
205 l	1	3798 ³⁴

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

³⁴ D-GB ⁴³ D-GB-E-P ⁷¹ D-GB-I-E-P ¹⁵² GB-GR-I ²⁶⁶ D-GB-F-I-NL-GR

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based



ENGINE OILS



15W-40

**Top Tec Truck 4450 15W-40****Protects the exhaust after-treatment systems.**

High performance lubricants. Thanks to the new additive technology with improved wear protection characteristics and oxidation stability, this lubricant meets the requirements of state-of-the-art engine concepts. In addition, the ash-reduced formulation enables an improved compatibility with catalytic converters and diesel particle filters (DPF).

Specifications and approvals: ACEA E9, API CK-4, API SN, Cummins CES 20086, Detroit Diesel DFS 93K222, Ford WSS-M2C 171-F1, Mack EOS-4.5, MB-Approval 228.31, Renault Trucks RLD-3, Volvo VDS-4.5

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: ACEA E7, Caterpillar ECF-3, Cummins CES 20081, Deutz DQC III-10 LA, JASO DH-2, MAN M 3575, MTU Typ 2.1

Area of use

Ideal for trucks, short- and longdistance buses, as well as for forestry, agricultural and construction machinery. Due to its good performance, this product is ideally suitable for use in state-of-the-art engines according to Euro IV, V and VI emission standards. Can be used in many vehicles without any limitations and is backward-compatible. Can be used in engines of older Euro II and III emission standards, if manufacturers' specifications are observed.

Cont.	Packaging Unit	Part no.
20 l	1	3778 ⁷¹
205 l	1	3780 ³⁴

**Touring High Tech Super SHPD 15W-40**

Mineral high-performance motor oil with modern wear-protection technology. Allows long oil change intervals. Reduces oil thickening caused by drag-in of soot. Keeps oil consumption low. Offers maximum lubrication reliability and optimum oil pressure under all operating conditions.

Specifications and approvals: ACEA E7, A3/B4, API CI-4, API SL, Allison C4, Deutz DQC III-18, Global DHD-1, JASO DH-1, Mack EO-N, MB-Approval 228.3, Renault Trucks RLD-2, Volvo VDS-3

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Caterpillar ECF-1-a, Caterpillar ECF-2, Cummins CES 20076, Cummins CES 20077, Cummins CES 20078, Deutz DQC III-10, John Deere JDQ 78A, Mack EO-M Plus, MAN M 3275-1, MB 229.1, MTU Typ 2, Renault Trucks RLD

Specially developed for commercial vehicle diesel engines without diesel particulate filter (DPF). Also suitable for mixed vehicle fleets. Tested for turbochargers and catalytic converters.

20 l	1	1121 ⁷¹
------	---	---------------------------

AUTOMATIC TRANSMISSION FLUIDS

**Top Tec ATF 1100**

Synthetic technology automatic transmission oil from the latest generation with extremely high performance reserves. Provides high thermal stability, ensuring ideal ageing resistance. Excellent wear protection and favorable friction behavior. Greatest safety reserves through modern additive technology. With improved formula for long transmission life. Compatible with all sealing materials.

Specifications and approvals: Allison C4, Dexron III G, Dexron III H, Dexron TASA (Typ A/Suffix A), DTRF 13C100 [236.1], Ford Mercon, MAN 339 Typ L1, MAN 339 Typ V1, MAN 339 Typ Z1, MB-Approval 236.1, Voith H55.6335.XX (G 607), ZF TE-ML 03D, ZF TE-ML 04D, ZF TE-ML 14A, ZF TE-ML 17C, ZF approval number ZF004926

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Allison TES 389, Caterpillar TO-2, Ford ESP-M2C 166-H, MB 236.6, Volvo 97341, ZF TE-ML 02F, ZF TE-ML 09, ZF TE-ML 11A, ZF TE-ML 11B, ZF TE-ML 14B

For automatic transmissions, manual shift transmission, steering systems, hydraulic and lateral drives both in the passenger car and in the commercial vehicle sector. Use according to the aggregate or car and transmission manufacturer's prescribed specifications.

1 l	6	3651 ⁷¹
20 l	1	3653 ⁷¹

GEAR OILS

**Fully Synthetic Hypoid-Gear Oil Truck (GL4/5) 75W-90**

Full synthetic hypoid transmission oil with extremely high performance reserves. Exceeds the highest test requirements demanded by renowned manufacturers. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless aggregate functioning. Provides great lubrication security along with ideal wear protection. Has outstanding low-temperature behavior. Reduces transmission noise. Enables extremely long oil change intervals.

Specifications and approvals: API GL4, API GL5, API MT-1, MAN 341 Typ Z2, MAN 342 Typ S1, MB-Approval 235.8, MIL-PRF 2105 E, Scania STO 2:0A, ZF TE-ML 02B, ZF TE-ML 05A, ZF TE-ML 12L, ZF TE-ML 12N, ZF TE-ML 16F, ZF TE-ML 17B, ZF TE-ML 19C, ZF TE-ML 21A, ZF approval number ZF001347

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: DFS 93K219.01 Detroit, MAN 341 Typ E3, MAN 342 Typ M3, MAN 3343 Typ S, SAE J 2360, Scania STO 1:0, Volvo 97312, ZF TE-ML 07A, ZF TE-ML 08, ZF TE-ML 12B

Specifically developed for use in commercial vehicles. Universal use TDL oil (total drive line) for shift, auxiliary and differential transmissions without limited-slip differentials. Comply with the vehicle or aggregate manufacturer's instructions.

20 l	1	1182 ⁷¹
------	---	---------------------------

**Hypoid Gear Oil (GL5) SAE 85W-90**

Mineral low-viscosity hypoid gear oil. For vehicles with tried and tested transmission technology. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless aggregate functioning. Provides a stable lubricating film. Provides great lubrication security along with ideal wear protection.

Specifications and approvals: API GL5, DTRF 12B100 [235.0], MB-Approval 235.0, MIL-L 2105 D, ZF TE-ML 16C, ZF TE-ML 17B, ZF TE-ML 19B, ZF TE-ML 21A, ZF approval number ZF000695

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: MAN 342 Typ M1

For highly stressed vehicle transmissions without limited-slip differentials, especially axle drives with hypoid gears. Comply with the vehicle or aggregate manufacturer's instructions.

1 l	6	1035 ⁷¹
20 l	1	1047 ⁷¹
60 l	1	1031 ³⁴

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based



Hypoid Gear Oil (GL5) LS SAE 85W-90

Mineral low-viscosity hypoid gear oil. For vehicles with tried and tested transmission technology. Even under the most difficult conditions and during large temperature fluctuations, it ensures flawless aggregate functioning. Provides a stable lubricating film. Provides great lubrication security along with ideal wear protection. Outstanding viscosity temperature behavior.

Specifications and approvals: API GL5, MIL-L 2105 D

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: DAF, GM B 40 1010, Volvo (Axles/limited slip differential), Volvo 97311, ZF TE-ML 05C, ZF TE-ML 21C

Area of use

For highly stressed axle drives with and without limited-slip differentials – especially for vehicles in which the aggregate or vehicle manufacturer specifies oil with Limited Slip additives (LS). Comply with the vehicle or aggregate manufacturer's instructions.

Cont.	Packaging Unit	Part no.
1 l	6	1410 ⁷¹
20 l	1	4706 ³⁴

GREASES/PASTES



Truck Lubricating Grease KP2K-30

For roller and plain bearings. Under difficult conditions, extreme loads, dusty and moist conditions. Contains highly effective additives for corrosion and oxidation protection as well as EP additives that ensure the best possible lubrication, even under extreme conditions and high pressures. The grease is able to absorb a large amount of water without losses in performance. Operating temperature range: -30 °C to +120 °C. Intermittent up to +130 °C. Pay attention to the manufacturer's instructions. Labeling according to DIN 51502: KP2K-30.

Specially developed for commercial vehicles, construction machinery and machines and equipment used for agriculture and forestry.

Lube Shuttle	400 g	20	3347 ⁷¹
--------------	-------	----	--------------------

VEHICLE CARE



Gloss Waxing Shampoo

Effective, multi-functional and pH-neutral quick-dispersing shampoo concentrate for washing vehicles by hand, and contains mild, skin-friendly, paintwork-friendly tensides and a high proportion of care ingredients. Washing, product care and drying are all made in a single procedure. The water film disperses immediately after rinsing, which helps stain-free drying of the vehicle. Among other applications, Gloss Waxing Shampoo is ideal for showrooms and general care, as previously applied polish and sealing products are not removed. The paintwork receives a high-gloss finish with long-lasting preservation and is thus protected against aggressive environmental influences.

For cleaning all materials in commercial motor vehicles, motorbikes, boats, mobile homes, garden furniture etc., including paintwork, chrome, rubber, plastic and glass.


10 l	1	8198 ²¹
------	---	--------------------

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

²¹ D ³⁴ D-GB ⁷¹ D-GB-I-E-P

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based



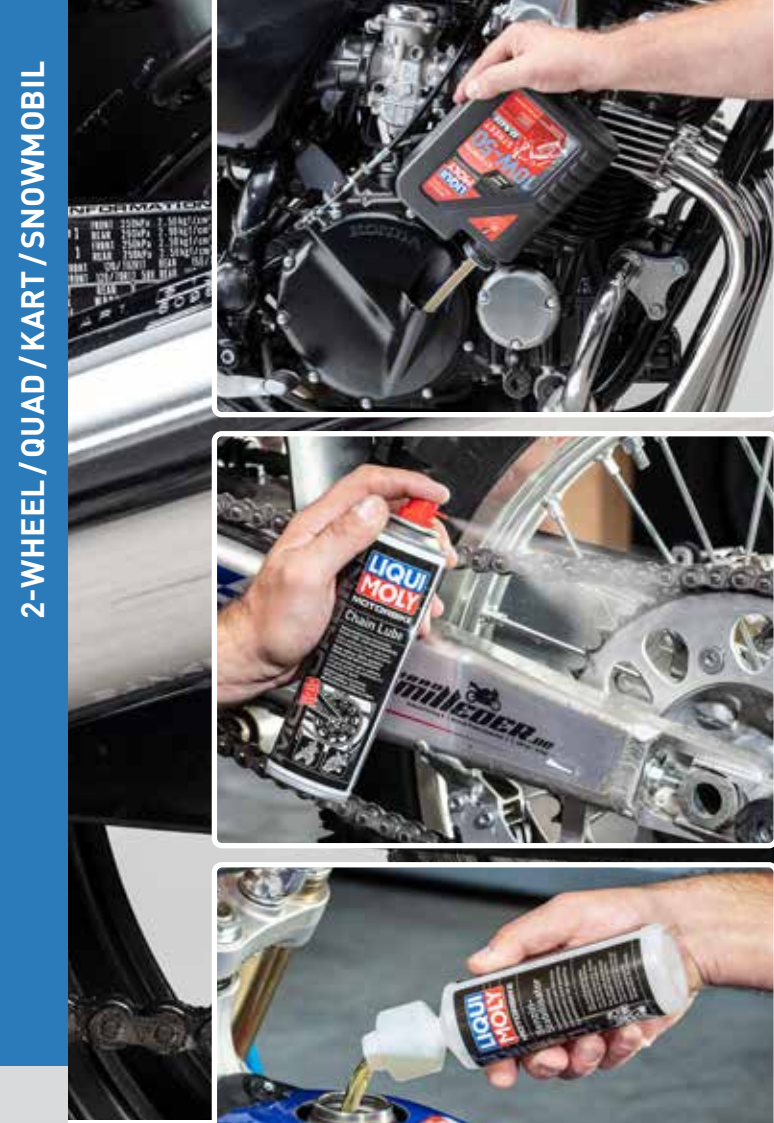

2-wheel/Quad/ Kart/Snowmobil

2-WHEEL/QUAD/KART/SNOWMOBILE

Additives	53
Engine oils 4-stroke - street	53
Engine oils 4-stroke - offroad	54
Engine oils 2-stroke - street	55
Engine oils 2-stroke - scooter	55
Engine oils 2-stroke - offroad	55
Gear oils	56
Fork oils/Shock absorber oils	56
Maintenance products for filters	57
Maintenance products	57
Brake fluids	58



Area of use

Cont.

Packaging Unit

Part no.



Motorbike 4T Bike-Additive

Optimizes engine performance. Removes deposits in the fuel system, on valves, spark plugs and in the combustion chamber and prevents renewed formation. This also reduces fuel consumption. Protects the entire fuel system from corrosion. Prevents carburetor icing. Cat tested.

Add to fuel in all 4-cycle engines (carburetor and injection system). 125 ml sufficient for 15 to 20 l fuel. Add every time you fill up.

125 ml 6 1581 ³⁴



Motorbike Gasoline Stabilizer

Preserves and protects fuel against aging and oxidation. Prevents corrosion throughout the entire fuel system. Prevents problems from occurring when motorbikes, motor scooters, ATVs, snowmobiles and other gasoline-driven 2-stroke and 4-stroke engines are decommissioned. Increases operational reliability. The product has a lasting effect.

Suitable for all 4-stroke and 2-stroke gasoline engines – especially for preventive care. Tested for turbochargers and catalytic converters. Filling the dosage chamber (25 ml) once is sufficient for 5 liters of fuel.

250 ml 6 3041 ⁴³



Motorbike Engine Flush

Cleaning fluid for clearing the engine interior of troublesome deposits. Dissolves sludge and lacquer formers. All types of oil-soluble and oil-insoluble residues are brought into suspension and removed during the next oil change. This allows the clean engine and fresh oil to realize their full potential.

Flushes out and cleans the oil circuits of motorcycles with four-stroke gasoline engines. The frequency of use is dependent on the degree of contamination of the oil circuit and on the quality of the oil used. 250 ml (1 can) is sufficient for up to 4.5 l of oil.

250 ml 6 1657 ⁴³

ENGINE OILS 4-STROKE - STREET

5W-40



Motorbike 4T Synth 5W-40 Street Race

Fully-synthetic motor oil of supreme quality. Lubricates and protects the engine, optimizes the power output, minimizes wear and ensures excellent cleanliness. As the official motor oil of the Moto2 and Moto3 series, it has proven itself even under extreme conditions. Transports the performance and experience from the racetrack directly to the road. Tested on engines with catalytic converters.

Specifications and approvals: API SN PLUS, JASO MA2

Ideal for air and water-cooled 4-stroke engines in both racing and road driving. For engines with or without a wet clutch.

1 l 6 2592 ²⁴⁷
4 l 4 1685 ²⁴⁷

10W-40



Motorbike 4T Synth 10W-40 Street Race

Fully synthetic high-performance motor oil. For maximum performance and outstanding engine protection under all operating conditions. Offers perfect lubrication, outstanding engine cleanliness, excellent friction and minimum wear. Ensures smooth engagement and disengagement as well as gear shifting, which significantly increases driving pleasure. Tested for use with catalytic converters and on racing machines.

Specifications and approvals: API SN PLUS, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to extreme operating conditions. Suitable for sporting applications. For engines with or without a wet clutch.

1 l 6 20753 ²⁴⁷
4 l 4 20754 ²⁴⁷



Motorbike 4T 10W-40 Street

High-performance motor oil based on synthetic technology. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction and minimum wear are just as much taken for granted as gentle clutch engagement and disengagement and gear shifting. Tested on engines with catalytic converters.

Specifications and approvals: API SN PLUS, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to extreme operating conditions. For sporting applications. Suitable for engines with or without a wet clutch.

4 l 4 1243 ²⁴⁷
20 l 1 1562 ³⁴
60 l 1 1563 ³⁴
205 l 1 1568 ³⁴



Motorbike 4T 10W-40

High-performance motor oil based on selected mineral oils. Ensures optimum performance and protection of the engine under all operating conditions. Reliable lubrication, optimum noise damping and low wear are just as much taken for granted as gentle clutch engagement and disengagement and gear shifting. Tested on engines with catalytic converters.

Specifications and approvals: API SN PLUS, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to tough operating conditions. Suitable for engines with or without a wet clutch.

1 l 6 3044 ²⁴⁷
4 l 4 3046 ²⁴⁷

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

³⁴ D-GB ⁴³ D-GB-E-P ²⁴⁷ D-B00KLET

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based



ENGINE OILS 4-STROKE - STREET



10W-50



Motorbike 4T Synth 10W-50 Street Race

Fully synthetic high-performance motor oil. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction and minimum wear are just as much taken for granted as gentle clutch engagement and disengagement and gear shifting. That makes a big difference to driving enjoyment! Tested on engines with catalytic converters. Tested on racing machines.

Specifications: API SN PLUS

Specifications and approvals: JASO MA2

Area of use

Developed for air and water-cooled 4-stroke engines exposed to normal to extreme operating conditions. For sporting applications. Suitable for engines with or without a wet clutch.

Cont.	Packaging Unit	Part no.
1 l	6	1502 ²⁴⁷
4 l	4	1686 ²⁴⁷
20 l	1	1567 ³⁴

10W-60



Motorbike 4T Synth 10W-60 Street Race

Fully synthetic high-performance motor oil. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction and minimum wear are just as much taken for granted as gentle clutch engagement and disengagement and gear shifting. That makes a big difference to driving enjoyment! Tested on engines with catalytic converters. Tested on racing machines.

Specifications and approvals: API SN PLUS, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to extreme operating conditions. For sporting applications. Suitable for engines with or without a wet clutch.

4 l	4	1687 ²⁴⁷
-----	---	---------------------

15W-50



Motorbike 4T 15W-50 Street

High-performance motor oil based on synthetic technology. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction and minimum wear are just as much taken for granted as gentle clutch engagement and disengagement and gear shifting. Tested on engines with catalytic converters.

Specifications and approvals: API SN PLUS, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to extreme operating conditions. For sporting applications. Suitable for engines with or without a wet clutch.

4 l	4	1689 ²⁴⁷
60 l	1	2565 ³⁴
205 l	1	2566 ³⁴

20W-50



Motorbike HD Synth 20W-50 Street

Fully synthetic motor oil tailored for use in air and water-cooled four-stroke motorbike engines, especially suitable for Harley Davidsons. Selected base oils and high-quality additive components ensure optimum lubrication, outstanding engine cleanliness and excellent friction in all operating conditions.

Specifications and approvals: API SN PLUS, JASO MA2

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Harley-Davidson H-D 360 Motor Cycle Oil 62600042

For a large number of Harley Davidson V-twin engines which specify a synthetic motor oil of 20W-50 viscosity. Exceptionally well-suited for use with or without a wet clutch.

1 l	6	3816 ²⁴⁷
4 l	4	3817 ²⁴⁷
20 l	1	3818 ³⁴

ENGINE OILS 4-STROKE - OFFROAD

5W-40



Motorbike 4T Synth 5W-40 Offroad Race

Fully synthetic high-performance motor oil. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction and minimum wear are just as much taken for granted as gentle clutch engagement and disengagement and gear shifting. That makes a big difference to driving enjoyment! Tested on engines with catalytic converters. Tested on racing machines.

Specifications and approvals: API SN PLUS, JASO MA2

Specially developed for air and water-cooled 4-stroke engines exposed to extreme loads off-road. For sporting applications. Suitable for Enduro and motocross motorbikes, quads, SxS and snowmobiles with and without a wet clutch.

1 l	6	3018 ²⁴⁷
4 l	4	3019 ²⁴⁷

10W-40



Motorbike 4T 10W-40 Offroad

High-performance motor oil based on synthetic technology. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction and minimum wear are just as much taken for granted as gentle clutch engagement and disengagement and gear shifting. Tested on engines with catalytic converters.

Specifications and approvals: API SN PLUS, JASO MA2

Specially developed for air and water-cooled 4-stroke engines exposed to extreme loads off-road. For sporting applications. Suitable for Enduro and motocross motorbikes, quads, SxS and snowmobiles with and without a wet clutch.

1 l	6	3055 ²⁴⁷
4 l	4	3056 ²⁴⁷

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based



ENGINE OILS 4-STROKE - OFFROAD



10W-50



Motorbike 4T Synth 10W-50 Offroad Race

Fully synthetic high-performance motor oil. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction and minimum wear are just as much taken for granted as gentle clutch engagement and disengagement and gear shifting. That makes a big difference to driving enjoyment! Tested on engines with catalytic converters. Tested on racing machines.

Specifications and approvals: API SN PLUS, JASO MA2

Area of use

Specially developed for air and water-cooled 4-stroke engines exposed to extreme loads off-road. For sporting applications. Suitable for Enduro and motocross motorbikes, quads, SxS and snowmobiles with and without a wet clutch.

Cont.

Packaging Unit

Part no.

1 l	6	3051 ²⁴⁷
4 l	4	3052 ²⁴⁷

10W-60



Motorbike 4T Synth 10W-60 Offroad Race

Fully synthetic high-performance motor oil. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction and minimum wear are just as much taken for granted as gentle clutch engagement and disengagement and gear shifting. That makes a big difference to driving enjoyment! Tested on engines with catalytic converters. Tested on racing machines.

Specifications and approvals: API SN PLUS, JASO MA2

Specially developed for air and water-cooled 4-stroke engines exposed to extreme loads off-road. For sporting applications. Suitable for Enduro and motocross motorbikes, quads, SxS and snowmobiles with and without a wet clutch.

4 l	4	3054 ²⁴⁷
-----	---	---------------------

ENGINE OILS 2-STROKE - STREET



Motorbike 2T Synth Street Race

Fully synthetic high-performance motor oil. Ensures maximum performance, lubrication, wear protection and engine cleanliness under all operating conditions. Offers excellent friction values, low smoke development and thus significantly increases the driving pleasure. Tested on engines with catalytic converters. Tested on racing machines.

Specifications and approvals: API TC, Husqvarna, ISO L-EGD, JASO FD

For separate and mixture lubrication systems in air- and water-cooled 2-stroke engines. Specifically for sporting applications. Self-mixing. Mixture ratio up to 1:100 according to the manufacturer's instructions.

20 l	1	1566 ³⁴
------	---	--------------------



2T Motoroil Race Tec

High-performance 2-stroke motor oil on an ester basis. Specially adapted to the extreme demands of sports and racing. Approved by the FIA for karting. Can be used for fuels of any kind, except methanol, etc.

Specifications and approvals: API TC, ISO L-EGD, JASO FD

For self-mixing (mixed lubrication) in air and water-cooled 2-stroke engines on motocross and street bikes, karts, scooters, etc.

1 l	6	21633 ³⁴
-----	---	---------------------

ENGINE OILS 2-STROKE - SCOOTER



Motorbike 2T Synth Scooter Race

Fully synthetic high-performance motor oil. Ensures maximum performance, lubrication, wear protection and engine cleanliness under all operating conditions. Offers excellent friction values, low smoke development and thus significantly increases the driving pleasure. Tested on engines with catalytic converters. Tested on racing machines.

Specifications and approvals: API TC, Husqvarna, ISO L-EGD, JASO FD

For air and water-cooled 2-stroke engines with separate and mixture lubrication. Specifically for sporting applications. Self-mixing. Mixture ratio up to 1:100 according to the manufacturer's instructions.

1 l	6	1053 ²⁴⁷
-----	---	---------------------

ENGINE OILS 2-STROKE - OFFROAD



Motorbike 2T Synth Offroad Race

Fully synthetic high-performance motor oil. Ensures maximum performance, lubrication, wear protection and engine cleanliness under all operating conditions. Offers excellent friction values, low smoke development and thus significantly increases the driving pleasure. Tested on engines with catalytic converters. Tested on racing machines.

Specifications and approvals: API TC, Husqvarna, ISO L-EGD, JASO FD

For separate and mixture lubrication systems in air- and water-cooled 2-stroke engines. Specifically for Enduro and motocross bikes, ATVs, SxS and snowmobiles. Self-mixing. Mixture ratio up to 1:100 according to the manufacturer's instructions.

1 l	6	3063 ²⁴⁷
4 l	4	3064 ²⁴⁷

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

³⁴ D-GB ²⁴⁷ D-BOOKLET

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based



GEAR OILS



Area of use

Cont.

Packaging Unit

Part no.

For transmissions and final drives operating under normal to high load.

1 l	6	3087 ⁷¹
-----	---	--------------------

For the most extremely stressed motorcycle transmission and final drives. Comply with the transmission manufacturer's instructions.

500 ml	6	1516 ⁷¹
1 l	6	3825 ⁷¹

For use in primary chain drives and clutches for most Harley Davidson models between 1984 and 2010. Important: Not suitable for models with primary belt drives.

1 l	6	3822 ⁷¹
-----	---	--------------------

**Motorbike Gear Oil 10W-30**

High-Performance high-pressure gear oil made from carefully selected base oils and multifunctional additives. The oil can therefore be used in a wide range of transmissions and drives.

Specifications and approvals: API GL4

**Motorbike Gear Oil 75W-90**

High-performance high-pressure transmission oil made from high-grade synthetic base oils and additives. Facilitates smooth and precise shifting even under extreme conditions and complies with performance class API GL5. Has excellent wear protection properties and ideal viscosity-temperature behavior.

Specifications and approvals: API GL5, MIL-L 2105 C, MIL-L 2105 D

**Motorbike Gear Oil HD 150**

Special synthetic gear oil for primary drives in Harley Davidson motorbikes. Optimum lubrication in all temperature ranges. The synthetic base oil ensures optimum pressure resistance.

FORK OILS/SHOCK ABSORBER OILS

**Motorbike Fork Oil 5W light**

Fully synthetic fork and shock absorber oil with optimized responsiveness. Also includes suitability for the fork oil requirement SAE 4W through SAE 2.5W. Prevents the formation of foam and the hardening of seals. Offers good corrosion and wear protection for high operating reliability.

Universal use in telescopic forks, shock absorbers in motorcycles, motor bicycles, mopeds and other two-wheeled vehicles.

500 ml	6	1523 ⁷¹
1 l	6	2716 ⁷¹
20 l	1	3016 ³⁴

**Motorbike Fork Oil 7,5W medium/light**

Full synthetic fork oil and shock-absorber oil. Reduces shear losses and provides sure handling performance even after long use. Prevents foam formation and seal hardening. Good corrosion and wear protection provide long service life.

Universal use in telescopic forks, shock absorbers in motorcycles, motor bicycles, mopeds and other two-wheeled vehicles.

1 l	6	2719 ⁷¹
-----	---	--------------------

**Motorbike Fork Oil 10W medium**

Full synthetic fork oil and shock-absorber oil. Reduces shear losses and provides sure handling performance even after long use. Prevents foam formation and seal hardening. Good corrosion and wear protection provide long service life.

Universal use in telescopic forks, shock absorbers in motorcycles, motor bicycles, mopeds and other two-wheeled vehicles.

500 ml	6	1506 ⁷¹
1 l	6	2715 ⁷¹

**Motorbike Shock Absorber Oil RACE**

Fully synthetic shock absorber oil. Prevents the build-up of deposits and reduces friction and wear. Suppresses foaming even under the toughest operating conditions. Absolutely compatible with gaskets. The unique formulation ensures a better feeling of contact between the tires and the road, enhancing both safety and the pleasure of riding.

Universal use in shock absorbers on motorbikes, mopeds, motor-assisted bicycles and other two-wheelers in the racing sector.

1 l	6	20972 ⁷¹
-----	---	---------------------

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based





Motorbike Foam Filter Cleaner

Water-miscible cleaning concentrate specially formulated for air filters. Excellently dissolves dust, dirt and grease and cleans gently, without damage to the foam pores. Has high capacity and is therefore economical to use.

Area of use

Cont.

Packaging Unit

Part no.

For all standard foam air filters in the 2 and 4-stroke range.

1 l	6	1299	71
-----	---	------	----



Motorbike Foam Filter Oil

Special oil for wetting foam air filters. Thanks to the outstanding adhesive properties of the liquid, sand and dust are reliably trapped in the filter, preventing greater wear on the engine. Increases engine service life. Water-repellent effect. Does not resinify or foam. The blue color when the filter is wetted helps to ensure uniform application.

Suitable for use on all two-stroke and four-stroke motorbikes with air or water-cooled engines using foam air filters.

500 ml	6	1625	43
1 l	6	3096	43



Motorbike Foam Filter Oil (Spray)

Specially developed aerosol for wetting foam and fabric air filters. Dust and dirt are reliably deterred even under extreme operating conditions and engine damage is thus avoided. Guarantees an optimum air flow and thereby maximum engine performance.

Suitable for use on all two-stroke and four-stroke motorbikes with air or water-cooled engines using foam or fabric air filters.

400 ml	6	1604	43
--------	---	------	----

MAINTENANCE PRODUCTS



Motorbike Cleaner

Cleaning fluid specially developed for motorcycles, motor scooters, ATVs and snowmobiles. Free of solvents that damage the environment.

For quick and thorough cleaning of motorcycles, motor scooters, ATVs, snowmobiles, etc.

1 l	6	1509	72
-----	---	------	----



Motorbike Chain and Brake Cleaner

Specially developed cleaner with selected solvent combinations for fast, easy cleaning and degreasing structural parts in the two-wheel sector.

For cleaning chains with and without O/X rings on two-wheelers and quads as well as drum and disc brake systems, their brake pads and components as well as brake calipers.

500 ml	6	1602	43
--------	---	------	----



Motorbike Chain Lube

Fully synthetic, extremely adherent and waterproof chain lubricating grease. With outstanding creep and lubricating effect. Particularly suitable for fast-running chains. Reduces chain elongation and helps to extend chain service life. Full effectiveness only when used unmixed. Before use we recommend cleaning the chain with Motorbike Chain and Brake Cleaner (part no. 1602).

For initial and maintenance lubrication of power-transmission chains. Especially suitable for dusty, dirty and corrosive conditions. For high-load and fast-running chains with and without O-rings and X-rings.

250 ml	12	1508	38
--------	----	------	----



Motorbike Chain Lube white

White, full synthetic special grease. For optimal lubrication through visible application on the chain. Cold, heat and spray resistant. Very good adhesion and wear protection. Reduces chain elongation and extends the service life of the chain. Good creeping properties and good corrosion protection. The 50 ml can can be refilled with the 400 ml can. We recommend cleaning the chain with Motorbike Chain and Brake Cleaner (part no. 1602) before use.

For all highly-stressed and high-speed motorcycle chains with and without O/X-rings.

400 ml	12	1591	43
--------	----	------	----



MAINTENANCE PRODUCTS



Motorbike Gloss Spray Wax

Wax with good cleaning action and outstanding luster. Slight road dirt and greasy soiling are easily and quickly removed without causing scratching. The super-easy polishing (like wiping off dust) produces a smooth finish with high gloss and very good color depth on all paints and dye types. The resulting protective layer equalizes slight scratches and preserves the paint against weather-related influences.

Area of use

For outstanding paintwork care for intermediate use. Optimum sealing properties for paint surfaces to protect against the weather. For colored and metallic paints, new or rejuvenated paint finishes, as well as for quickly preparing new and used vehicles in the show room.

Cont.

400 ml

Packaging Unit

6

Part no.

3039 43



Motorbike Helmet Interior Cleaner

Cleans gently and thoroughly. Within a short time (approx. 10 minutes) removes the unpleasant odors that are caused by bacteria and mold. Forms a protective film that prevents rapid recontamination.

For cleaning helmet padding, visors, trim, dual seats, etc.

300 ml

12

1603 43



Motorbike Visor Cleaner

Preserves and cleans helmets, visors and protective goggles. Active anti-misting for common glass and plastic surfaces. The product has a long-term effect. Removes dirt, insects, oil and silicone layers. For a clear view and increased safety.

Used especially for cleaning, care and anti-misting for common glass and plastic surfaces.

100 ml

12

1571 34



Motorbike Tire Inflator and Sealer

Seals punctured tires and inflates them again. Do not use where tube ripped or where tire has slipped off the wheel or tire has been cut at the side. After the repair, only travel at moderate speed. At the next opportunity, the tire must be repaired or replaced.

First Aid for punctures for all tire sizes with or without inner tube.

300 ml

12

1579 38

BRAKE FLUIDS



Brake Fluid DOT 4

Synthetic brake fluid based on glycol ethers, alkyl polyglycols and glycol ether esters. It contains inhibitors to prevent the corrosion of metallic brake components and to reduce oxidation at increased temperatures. The brake fluid has a high wet and dry boiling point, thus ensuring safe braking even after the absorption of some moisture over an extended period of use. Special moisture scavengers help to prevent against the formation of steam bubbles.

Specifications and approvals: FMVSS 116 DOT 3, FMVSS 116 DOT 4, ISO 4925 Class 3, ISO 4925 Class 4, SAE J 1703, SAE J 1704

Exceptionally well-suited for use with all disk and drum brake systems, as well as vehicle clutch systems for which a synthetic brake fluid of this specification is prescribed. The brake fluid is also suitable for use in ABS brake systems.

250 ml	6	21155	21
500 ml	6	21156	34
5 l	4	21158	34
20 l	1	21159	71



Brake Fluid Racing


Synthetic brake fluid for extreme operating conditions. It contains inhibitors to prevent the corrosion of metallic brake components and to reduce oxidation at increased temperatures. The brake fluid has an excellent wet and dry boiling point, thus ensuring safe braking even after the absorption of some moisture over an extended period of use. Special additives prevent the premature build-up of vapor bubbles.


Specifications and approvals: FMVSS 116 DOT 4, ISO 4925 Class 4, SAE J 1703, SAE J 1704

Exceptionally well suited for the use of all disk and drum brake systems, as well as clutch systems for which a synthetic brake fluid of this specification is prescribed. The brake fluid is also suitable for use in ABS brake systems.

250 ml	24	3679	135
500 ml	6	21172	34

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.



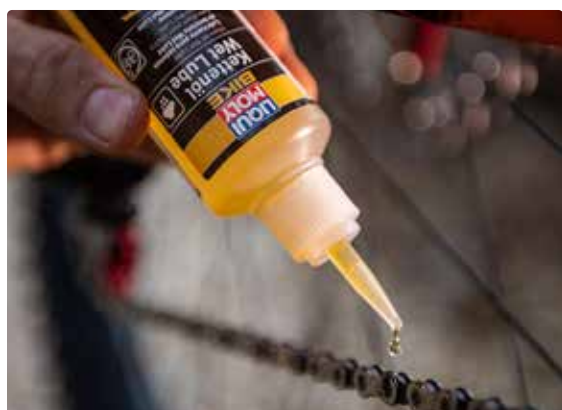






Bicycle products

BICYCLE PRODUCTS



Lubricants	60
Maintenance products	60
Tyre reparation	60

LUBRICANTS




		Area of use	Cont.	Packaging Unit	Part no.
	Bike Chain Oil Dry Lube Outstanding long-lasting lubricant for the bicycle chain. Specially designed for dry and dusty conditions. Contains a selected combination of active ingredients that offer extreme wear protection as well as high penetration and adhesive properties. Tangibly reduces the friction of the chain and ensures particularly quiet operation.	Specially designed for lubricating and maintaining bicycle chains in dry and dusty conditions. Also suitable for e-bikes.	100 ml	6	21780 ²⁷⁰
	Bike Chain Oil Wet Lube Powerful long-life lubricant for all bicycle chains. Specially suited for moist, dirty conditions. Ensures particularly smooth running and protects the metal parts against corrosion and wear. Drives out moisture and is strongly water-repellent and has outstanding penetration and adhesive properties. Does not react with plastics, paints or metals. Environmentally friendly as biodegradable.	Especially for lubrication and care of bike chains under wet or moist conditions. Also suitable for e-bikes.	100 ml	6	21779 ²⁷⁰
	Bike Brake and Chain Cleaner Cleaner with specially selected combination of solvents. For the rapid and effective cleaning and degreasing chains and disk brakes on bicycles. Particularly effective on oily and greasy dirt.	For cleaning and degreasing chains and disk brakes on bicycles. Also suitable for e-bikes.	400 ml	6	21777 ²⁴⁷
	Bike Ceramic Chain Spray Special lubricant for chains on bicycles and e-bikes. Reduces friction and wear due to its ceramic high-performance additives. Protects chain and cassette in moist and dirty conditions as well as in dry and dusty ones. Has outstanding creep directly after application. Spin-off is minimized thanks to the tremendous adhesion strength. Provides excellent corrosion protection for metallic components and does not react with plastics, paints or metals.	For lubricating and protecting bicycle and e-bike chains under all operating conditions.	200 ml	6	21774 ⁶¹
	Bike Chain Spray Universal long-lasting lubricant for bicycle chains. Suitable for use both in damp and dirty and in dry and dusty conditions. Displaces moisture, has a water-repellent effect, ensures quieter operation and offers outstanding penetration and adhesive properties. Protects all metal parts from corrosion. Does not react with plastics, paints or metals. Plant-based, so biodegradable.	Specially designed for lubricating and maintaining bicycle chains in both damp and dry conditions. Also suitable for e-bikes.	400 ml	6	21776 ²⁴⁷

MAINTENANCE PRODUCTS

	Bike Cleaner Highly effective biodegradable cleaner. Developed specially for very dirty bicycles. Dissolves and removes sludge, grime, dust, leaves etc. quickly and simply. Does not leave any greasy residues and has no influence on braking effect.	For cleaning bicycles and carbon parts. Also suitable for e-bikes.	1 l	6	21778 ²⁶⁴
	Bike Detailer For quick paintwork care for intermediate use. Removes light soiling such as dust or water spots and leaves a nice shine. Seals smooth paintwork for several weeks and provides an excellent water repellent effect as well as long-lasting protection against aggressive environmental influences. Maintains the cleaning finish for an extended period and reduces the adhesion of dirt. With a pleasantly fruity scent.	For all smooth paintwork of bicycles, e-bikes and pedelecs made of aluminum, carbon, steel as well as bikes made of titanium. Can also be used on smooth plastic surfaces, rims, handlebars, etc.	500 ml	6	21773 ²⁷⁰

TYRE REPARATION

	Bike Tire Fix Special combination of active agents for first aid in the event of punctured tires. Repairs flat tires without the need for removal. Not suitable for use on tubes that ripped or cut at the side, or if the tire has slipped off the rim.	For the repair of bicycle tires (with or without inner tube) from 12 – 29 inches. Can be used for all common bicycle valves (Schrader, Presta valve and Dunlop valves). Also suitable for e-bikes.	75 ml	6	21775 ²⁷⁰
---	--	--	-------	---	----------------------



Marine

MARINE

Additives	62
Engine oils 4-stroke	62
Engine oils 2-stroke	63
Gear oils	64
Greases	64
Maintenance products	64

ADDITIVES

**Marine Diesel Protect**

The efficient solution for bacteria, yeast and mold. Suitable for reliable long-term preservation. Maintains and protects the entire fuel system thanks to cleaners and corrosion protection. With cetane number booster for easier starting when recommissioning and maximum engine performance. **Use biocides safely. Always read the label and product information before use.**

Area of use

For preventive use and for disinfecting contaminated tank systems on vessels and in storage tanks. Ratio 1:200 booster dose for systems which are already contaminated. One measuring cup (25 ml) is sufficient for 5 l of diesel fuel. As a preventive application (1:1,000), one measuring cup (25 ml) is sufficient for 25 l of diesel fuel.

Cont.	Packaging Unit	Part no.
500 ml	6	25001 ¹⁴²
1 l	6	25002 ²⁹

**Marine Super Diesel Additive**

A combination of agents which cleans, protects and boosts the cetane number. The enhanced ignition performance improves the combustion of the fuel. Corrosion protection additives protect the entire fuel system reliably against the formation of rust and corrosion. Due to its outstanding cleaning properties, the components remain clean and deposits are prevented from forming.

For all diesel engines in the marine sector, including pumped-jet and common rail injection systems. Fully compatible with all conventional diesel and biodiesel fuels. 500 ml is sufficient for 250 l of fuel. Filling the dosage chamber (25 ml) once is sufficient for 12.5 l of fuel.

500 ml	6	25005 ¹⁴²
1 l	6	25007 ¹⁴²

**Marine Fuel Stabiliser**

Preserves and protects fuel against aging and oxidation. Prevents corrosion throughout the fuel system and ensures no problems arise when decommissioning the engine. Stabilizes gasoline with organic content.

For all 2-stroke and 4-stroke gasoline engines for storage and preservation. Also suitable for long-term use in seldom-used engines. 500 ml is sufficient for 100 l of fuel. Filling the dosage chamber (25 ml) once is sufficient for 5 l of fuel.

500 ml	6	25009 ¹⁴²
--------	---	----------------------

**Marine Fuel System Cleaner**

Highly effective combination of cleaning and preserving additives for 2-stroke and 4-stroke gasoline engines. Removes deposits on injection valves, intake valves, spark plugs and in the combustion chamber and prevents new deposits from forming. For a smoother running engine Eliminates starting problems and rough engine running. Saves fuel and reduces pollutant emissions.

For all types of gasoline injection systems and carburetors. For adding to fuel tanks to deal with and prevent problems. 500 ml is sufficient for 250 l of fuel. Filling the dosage chamber (25 ml) once is sufficient for 12.5 l of fuel.

500 ml	6	25011 ¹⁴²
--------	---	----------------------

ENGINE OILS 4-STROKE

10W-30

**Marine 4T Motor Oil 10W-30**

High-performance low-friction motor oil based on synthetic technology. Provides increased corrosion and wear protection as well as quick oil penetration of the engine and turbocharger with additives specially adapted to maritime use. Exceeds leading engine manufacturers' requirements. Fulfills warranty cover provided by manufacturers who require NMMA FC-W Catalyst Compatible® approval.



For all gasoline-driven in-board and outboard engines.

1 l	6	25022 ²⁴⁷
5 l	4	25023 ²⁴⁷

Specifications and approvals: API SM, NMMA FC-W Catalyst Compatible®

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Honda Marine, Mercury Marine, NMMA FC-W, Selva, Suzuki Marine, Tohatsu, Volvo Penta, Yamaha

10W-40

**Marine 4T Motor Oil 10W-40**

High-performance low-friction motor oil based on synthetic technology with modern additive technology. Specially developed for maritime use. Provides excellent wear and corrosion protection and maximum engine cleanliness. Meets leading engine manufacturers' requirements. Tested for use with catalytic converters and turbochargers.

For all gasoline and diesel engines in the marine sector. Especially suitable for high-load boat engines.

1 l	6	25012 ²⁴⁷
5 l	4	25013 ²⁴⁷
60 l	1	25014 ³⁴

Specifications and approvals: ACEA A3/B4, E7, API SL, API CI-4, Mack EO-N, Renault Trucks RLD-2, Volvo VDS-3

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Caterpillar ECF-1-a, Caterpillar ECF-2, Cummins CES 20071, Cummins CES 20072, Cummins CES 20076, Cummins CES 20077, Cummins CES 20078, Detroit Diesel, Deutz DQC III-10, MAN M 3275-1, Mercury Marine, MTU Typ 2, Selva, Suzuki Marine, Tohatsu, Yamaha

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

10W-40



Marine PWC Oil 10W-40

High-performance motor oil based on synthetic technology. The special additive package ensures maximum engine performance and ideal wear protection. Guarantees the best possible lubrication, outstanding engine cleanliness and excellent friction values for wet clutches, even at high speeds. Satisfies or exceeds the requirements and specifications of the leading engine manufacturers.

Specifications and approvals: API SN PLUS, JASO MA2

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Honda, Kawasaki, SeaDoo, Suzuki, Yamaha

Area of use

Especially suitable for PWC (personal water craft) 4-stroke engines. Ideal for sporting applications. Outstandingly suited for engines with or without a wet clutch.

Cont.	Packaging Unit	Part no.
1 l	6	25076 ²⁴⁷
4 l	4	25077 ²⁴⁷

15W-40



Marine 4T Motor Oil 15W-40

High-performance motor oil based on selected base oils and modern additive technology, developed specially for the maritime requirements. Even in extreme conditions guarantees optimum lubrication and reliable protection against wear. Tested for use with catalytic converters and turbochargers.

Specifications and approvals: ACEA A3/B4, E7, API CI-4, API SL, Mack EO-N, MTU Typ 2, Renault Trucks RLD-2, Volvo VDS-3

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Caterpillar ECF-1-a, Caterpillar ECF-2, Cummins CES 20076, Cummins CES 20077, Cummins CES 20078, Detroit Diesel, Deutz QDC III-10, MAN M 3275-1

All-season oil for gasoline and diesel marine engines. Can be mixed with all commercially available motor oils.

1 l	6	25015 ²⁴⁷
5 l	4	25016 ²⁴⁷
20 l	1	25061 ³⁴

25W-40



Marine 4T Motor Oil 25W-40

High-performance motor oil with synthetic additives specially adapted to maritime use. Even under extreme operating conditions, it provides for a stable lubricating film. Keeps engine seals, such as shaft sealing rings and valve stem seals flexible and minimizes oil consumption. Meets leading engine manufacturers' requirements. Fulfills warranty cover provided by manufacturers who require NMMA FC-W Catalyst Compatible® approval. Tested for use with catalytic converters and turbochargers.

Specifications and approvals: API SM, NMMA FC-W Catalyst Compatible®

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Honda Marine, Mercury Marine, NMMA FC-W, Selva, Suzuki Marine, Tohatsu, Volvo Penta, Yamaha



Motor oil for gasoline-driven inboard and outboard engines. Can be mixed with all commercially available motor oils.

1 l	6	25026 ²⁴⁷
5 l	4	25027 ²⁴⁷
20 l	1	25028 ³⁴

ENGINE OILS 2-STROKE



Marine 2T Motor Oil

High-performance 2-stroke motor oil based on selected base oils and specially formulated additives. Ensures reliable lubrication, high operational reliability and outstanding protection against wear and corrosion.

Specifications and approvals: API TC, JASO FB, NMMA TC-W3®

For air and water-cooled 2-stroke marine engines with separate and premix lubrication systems. Self-mixing. Mixing ratio up to 1:100. Please note that the mixture ratio specified by the manufacturer must be observed.

1 l	6	25019 ²⁴⁷
5 l	4	25020 ²⁴⁷



Marine 2T DFI Motor Oil

Semi-synthetic, ultra-high-performance 2-stroke motor oil specially developed for the marine sector. Specially developed to satisfy the complex requirements of the latest generation of direct injection engines. Ensures optimum lubrication even at high operating temperatures, guarantees maximum engine and piston cleanliness and low-fuming combustion.

Specifications and approvals: NMMA TC-W3®

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Evinrude E-Tec Engines, ISO L-EGC, ISO L-EGD, JASO FC, JASO FD, Mercury DFI 2 stroke Engines

Recommended and tested for Evinrude E-Tec and Mercury DFI 2-stroke engines. Can be used in the mixing ratios 1:30, 1:50 or 1:100. Also suitable for all other 2-stroke and DFI 2-stroke engines. For separate and mixture lubrication.

5 l	4	25063 ²⁴⁷
-----	---	----------------------



Marine Fully Synthetic 2T Motor Oil

Fully synthetic high-performance motor oil for 2-stroke outboard engines. Top quality basic oils and specially formulated additives provide for excellent lubrication, superb reliability and outstanding protection against wear and corrosion. With TC-W3-level performance.

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: NMMA TC-W3

For air and water-cooled 2-stroke marine engines with separate and premix lubrication systems. An outstanding product formulated for high-performance engines. Biodegradable (CEC L-33-T-82 Test: 80 % in 21 days)

1 l	6	25021 ¹³
-----	---	---------------------

GEAR OILS

**Marine ATF**

ATF oil specially developed for the marine sector based on synthetic technology and the latest additive technology. Offers increased corrosion protection and minimizes wear compared with conventional ATF oils. The high thermal stability and excellent protective properties give it optimum resistance to aging with maximum safety reserves. Compatible with all sealing materials.

Specifications and approvals: Dexron II D, Dexron II E, Dexron III G, Dexron III H, Dexron TASA (Typ A/Suffix A), ZF TE-ML 04D, ZF approval number ZF004927

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: Allison C4, Mariner, MerCruiser, Mercury

Area of use

For drives and transmissions such as reverse gears, power steering, control systems, trimming systems, hydrostatic transmission ratios and hydraulic and mechanical systems that require the use of an ATF oil. Cannot be used where GL4 or GL5 oils are specified.

Cont.	Packaging Unit	Part no.
1 l	6	25067 ¹⁴²

**Marine Fully Synthetic Gear Oil GL4/GL5 75W-90**

Fully synthetic high-performance gear oil with extremely high performance reserves. Ensures assemblies function perfectly, even under extreme operating conditions and when exposed to large temperature fluctuations. Meets the requirements for API GL4 and GL5 performance categories and corresponds to SAE 75W-90 viscosity grade.

Specifications and approvals: API GL4/5, API MT-1

LIQUI MOLY also recommends this product for vehicles or assemblies for which the following specifications or original part numbers are required: ZF TE-ML 02B, ZF TE-ML 05A, ZF TE-ML 12L, ZF TE-ML 12N, ZF TE-ML 16F, ZF TE-ML 17B, ZF TE-ML 19C, ZF TE-ML 21A

For marine transmissions which require a top quality lubricant. Also suitable for drive wheels of different categories and reverse gears. Exceeds the highest test requirements of well-known transmission manufacturers.

250 ml	12	25037 ¹⁴²
--------	----	----------------------

**Marine Gear Oil GL4/GL5 80W-90**

High-performance gear oil based on selected base oils and with specially formulated additives for manual shift transmissions. Minimizes wear and noise. Outstanding corrosion protection and resistance to aging. Meets the requirements for API GL4 and GL5 performance categories and corresponds to SAE 80W-90 viscosity grade.

Specifications and approvals: API GL4/5, API MT-1

For outboard and inboard transmissions subject to a normal to high load. Also suitable for Z-drives.

250 ml	12	25031 ¹⁴²
--------	----	----------------------

**Marine High Performance Gear Oil 85W-90**

Special high-performance gear lube for the maritime sector. With unique package of additives that guarantees outstanding wear protection even in the case of contamination with water. Stable under extreme pressures even under high stresses and at high speeds. Offers outstanding corrosion protection and very good oxidation resistance.

blue coloring

Meets the requirements of common transmission manufacturers in the marine sector. For Mercury outboard motors as of 75 hp output as well as MerCruiser Z-drives. Can be used as a replacement for a high-performance gear lube with viscosity SAE 90.

1 l	6	25079 ¹⁴²
20 l	1	25080 ³⁴

GREASES

**Marine Winch Grease**

Synthetic high-performance grease with PTFE solid lubricants specially developed for all kinds of winching and hoisting applications. The solid lubricant provides the ultimate in wear protection and reduces friction. Resistant to seawater and saltwater with excellent adhesive properties. Does not contain resins or acids.

Ideally suited for winching and hoisting applications with non-ferrous metal pairings and plastic/metal pairings. Powerful adhesive properties and neutral in respect of harmful environmental factors.

100 g	6	25046 ¹⁴²
-------	---	----------------------

**Marine Grease**

Heavy-duty grease for many of the lubrication points in the maintenance of vessels. Reduces friction and wear. Extremely long-lasting lubrication properties. Excellent aging and shear stability, and resistant to hot and cold water. Water-repellent and totally impervious to saltwater. Meets the requirements of NATO Marine Specification G460. Resistant in wet environments and provides excellent sealing properties. Labeling according to DIN 51502. KPF2G-20.

Versatile product for use on grease points across all marine needs. Can also be used for exterior components which are exposed to salty air and seawater.

250 g	12	25042 ¹⁴²
400 g	12	25044 ¹⁴²

MAINTENANCE PRODUCTS

**Marine Multi-Spray**

Specifically designed for marine purposes to protect and preserve. Keeps moving parts moving and protects against corrosion and oxidation. Drives out moisture and protects the vessel's entire electrical system. Frees up bolts which have rusted solid and reduces squeaking noises. Neutral acting on plastics, paints, metals and wood.

Versatile product for use as a multi-purpose spray. For all maintenance and service work.

400 ml	6	25052 ¹⁴²
--------	---	----------------------

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.



Marine Gloss Spray Wax

Water-repellent, saltwater and UV-resistant wax with excellent cleaning properties that leave an outstanding shine. Quickly and easily removes light soiling and greasy contaminants without leaving scratches. The protective layer left behind smooths out scratches and protects the paint from the weather.

Area of use

An outstanding product for quickly sprucing up paintwork. Optimum sealing properties on paintwork (e.g. GFRP and gelcoat). Also suitable for imitation leather and chrome elements.

Cont.	Packaging Unit	Part no.
400 ml	12	25054 ¹⁴²



Marine Universal Cleaner K

Low-foaming, biodegradable boat cleaner with outstanding cleaning performance. Dissolves even stubborn accumulated dirt such as dark drain tracks after lengthy storage, bird droppings, abrasion marks from shoes and dirt caused by fenders. Very economical thanks to efficient concentration for use. Biodegradable according to the Detergent and Cleaning Agent Law (Germany).

Universal special cleaner for routine cleaning or extremely dirty boats. Suitable for many different materials such as coated and uncoated plastics, GFRP and gelcoats as well as fabric soft tops, brass, aluminum, stainless steel, chrome, rubber and painted or sealed wood.

1 l	6	25073 ¹⁴²
-----	---	----------------------



Garden equipment

GARDEN EQUIPMENT	
Lubricants	67
Maintenance Products	67



2-Cycle Power Saw Oil

High quality and high performance motor oil specifically developed for lubricating air-cooled 2-cylinder engines. Exceeds the tough requirements placed by the leading power saw manufacturers. With API-TC. For optimal lubrication and wear protection even under the toughest conditions. With effective corrosion protection. Keeps the engine clean. Cat tested.

Specifications and approvals: API TC

Area of use

For high performance power saws. With and without catalytic converters. Highly mixable with fuels. Comply with the manufacturer's mixing ratios.

Cont.	Packaging Unit	Part no.
1 l	6	1282 ²¹



2-Stroke Motor Oil

High quality semi-synthetic 2-cycle motor oil for use in all 2-cycle engines. Secures the functional performance of the engine and ensures maximum service life. Self-mixing. Selected mineral and synthetic base oils combined with advanced additive technology facilitates residue-free combustion and keeps the engine clean. The engine is ideally protected from wear.

Specifications and approvals: API TC, ISO L-EGC, JASO FC, TISI (Thailand International Standards Institute)

For separate lubrication and gasoil lubrication in motorcycles, motor bicycles, lawnmowers, power saws and emergency power units. Mixing ratio up to 1:50.

250 ml	12	1051 ²¹
1 l	6	1052 ²¹



Lawnmower Oil SAE 30

Single-grade motor oil with high-quality base oils and high additive content. Ensures first-class lubrication, optimum engine cleanliness, outstanding wear protection and a long service life of the lawnmower engine. Also provides reliable protection against corrosion under adverse conditions and when overwintering. Tested on engines with catalytic converters.

Specifications and approvals: API SJ

For 4-stroke lawnmower engines, emergency power units and other engines that require a single-grade motor oil with viscosity class SAE 30 and the existing specifications.

1 l	6	1264 ²⁴⁷
-----	---	---------------------



Universal Oil for Garden Equipment 10W-30

Multigrade motor oil with high-quality base oils and high additive content. Ensures optimum lubrication and outstanding engine cleanliness year-round, even under the most demanding conditions.

Specifications and approvals: ACEA A3, ACEA B3, API CF, API SG, API SH, API SJ

For 4-stroke gasoline and diesel engines in lawnmowers, emergency power units, riding mowers, chippers, rotary tillers, scarifiers, string trimmers, high-pressure cleaners, snow blowers, etc.

1 l	6	1273 ²⁴⁷
-----	---	---------------------



Bio Saw Chain Oil

Environmentally friendly, biodegradable chain oil (test OECD 301 B), plant based. Thanks to the outstanding adhesion properties and first-class lubricating effect, provides optimum protection of moving parts such as chain links and joints against wear and corrosion. Ensures year-round use at all outside temperatures based on its favorable viscosity characteristics. Tested by the KWF (Committee for Forests and Forestry [Germany]).

For lubricating chains on motor saws. Also for extreme applications such as sawing hardwoods.

1 l	6	1280 ²⁴⁷
-----	---	---------------------



www.blauer-engel.de/uz178



Hydraulic Oil HLP 46

Mineral hydraulic oil with the classification type HLP acc. to DIN 51524 Part 2. Contains select agents to improve the aging resistance in the wear and corrosion protection as well as the EP properties. Ideally suited in systems in which high thermal loads may arise.

Specifications and approvals: Hydrauliköl DIN 51524 Teil 2 HLP 46

For machines, pumps and plants. Comply with the machine and plant manufacturer's operating instructions. Viscosity ISO VG 46

20 l	1	1110 ⁷¹
------	---	--------------------

MAINTENANCE PRODUCTS



LM 40 Multi-Purpose Spray

Lubricates, cleans, loosens, protects and preserves. Keeps moving parts moving. Reaches even the most hidden lubrication points thanks to its excellent penetration properties. Loosens stubbornly rusted and burnt-on screws quickly. Infiltrates and removes dirt and stubborn oil and grease residues. Provides protection against rust and corrosion and protects chrome parts.

The multipurpose product for house, hobby, workshop, vehicle and industry. For hinges, rollers, locks, bolts, switches, handles, Bowden cables, vehicle antennas and much more.

400 ml	12	3391 ⁷¹
--------	----	--------------------



Start Fix

The reliable starting aid in cold or damp conditions, when the spark plugs are wet and battery charge is low. Consists of a combination of particularly highly flammable substances and is ideal for all gasoline and diesel engines. Helps combustion engines to start and is effective even at very low temperatures. Preserves the battery and is economic to use.

For all 2-stroke and 4-stroke gasoline and diesel engines in cars, trucks, buses, motorcycles, boats, construction machinery, tractors, lawnmowers, motor saws, etc.

200 ml	12	20768 ⁴³
--------	----	---------------------

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

²¹ D ⁴³ D-GB-E-P ⁷¹ D-GB-I-E-P ²⁴⁷ D-BOOKLET

Fully synthetic
Synthetic technology
Semi synthetic
Mineral-based





Gun care products

Gun care products

**GUNTEC Barrel and Gun Cleaner**

Cleaning foam for intensive yet gentle cleaning of handguns and rifles, including the barrels. Compatible with practically all materials (wood, blued metals, stainless steel, plastic). Particularly suitable for removing copper or tombac residues from barrels, thereby resolving the problems with precision that these cause.

Area of use

For cleaning handguns and rifles as well as gun barrels.

Cont.

200 ml

Packaging Unit

6

Part no.

24394 ³⁴

**GUNTEC Gun Grease**

Strongly adherent synthetic special grease with ceramic solid lubricants. Ensures the safe functioning of all types of weapons due to its excellent lubricating effect. The solid lubricants contained ensure the lowest friction coefficients and best possible wear protection even in critical lubrication situations. Offers the necessary corrosion protection for all metallic components even under extreme operating conditions.

For the lubrication of guns, weapon components and precision mechanical components of all kinds. Also for the lubrication of components in the low temperature range as well as components which are subject to a wide operating temperature range.

20 ml
50 ml

12
6

24397 ¹³³
24392 ³⁴

**GUNTEC Gun Oil**

Highly adherent, medium-viscous special oil for preserving and lubricating guns and metal parts. Ensures optimum corrosion and wear protection for moving parts and at all lubrication points. Thanks to good penetration properties and high protection against resinification, it is also ideal for lubricating precision mechanical components. Versatile gun oil with good plastic compatibility and the option of oiling wood.

For guns, machines, tools, metallic components, instruments and much more. Excellent protection against environmental influences during intermediate storage of metal parts and semi-finished products.

100 ml

6

24391 ³⁴

**GUNTEC Gun Care Spray**

Highly adhesive, medium-viscous special oil spray for preserving and lubricating guns and metal parts. Ensures optimum protection against corrosion and wear and forms an even, stable and particularly water-repellent oil film. Offers extremely good penetration properties, high protection against resinification and the lowest friction coefficients. Versatile with good plastic compatibility and the option of oiling wood.

Preserves, lubricates and protects guns, machines, tools, metallic components, instruments and much more from wear, rust and corrosion.

200 ml

6

24396 ¹³³

**GUNTEC Silencer Cleaner**

Aqueous special surfactant solution to quickly and thoroughly dissolve and neutralize tenacious combustion residues in silencers. Thanks to its independent effect, it enables even silencers that cannot be disassembled and high-performance carbon silencers to be cleaned easily and completely.

For cleaning silencers in the event of smoke deposits. Also suitable for ultrasonic baths.

500 ml

6

24395 ³⁸



Workshop equipment/ accessories/tools

WORKSHOP EQUIPMENT/ACCESSORIES/TOOLS	
Accessories for containers/drums	71
Accessories/tool – Greases	72
Accessories/tool – Adhesives & sealants - Underseal	72
Accessories/tool – Workshop chemical products	73
Accessories/tool – A/C system cleaning	73
Accessories/tool – Diesel particulate filter purge	73

Gear oil filler



Oil Filling Unit for Transmissions

- Tank volume: 7 liters
- Filling hose: 1,600 mm
- 16 adapters for BMW, Ford, Mercedes-Benz, V.A.G. in case
- Drip pan

Area of use

For filling transmissions and differentials with oil. Specifically for dual-clutch transmissions.

Cont.

Packaging Unit

Part no.

1 Piece 1 **7941** ²¹

Other accessories for containers/drums/tank systems



Measuring cup with flexible outlet pipe 3 l

3 liter capacity, not calibrated.

For easier filling and measuring of liquids such as oils, radiator antifreeze, etc.

1 Piece 1 **29078** ²¹



Plastic Hand Pump

- Plastic hand pump made of polypropylene
- For 55 l, 60 l and 205 l drums
- Telescope intake pipe
- Adjustable from 480 to 950 mm

Can be used for nearly all low viscosity fluids. Do not use to pump Hazard Class A I and A II solvents and fluids.

1 Piece 1 **7932** ²¹



Drum Fill Level Indicator

For commercially available 60 and 205-liter drums.

- Reusable
- Oil resistant
- Provides ventilation

Can be used for all fresh oils, industrial oils and used oils as well as diesel fuel and other liquids. Simplifies stockpiling, reordering and inventory.

1 Piece 1 **7988** ²¹

Accessories for drum packages



Hose reel, closed

- 10 m hose length, 1/2"
- For wall or floor mounting
- Dimensions: 508 (H) x 495 (W) x 158 (D) mm
- Weight: 18,9 kg

1 Piece 1 **7838** ²¹



Hose reel, open

- 10 m hose length, 1/2"
- For wall or floor mounting
- Dimensions: 498 (H) x 472 (W) x 152 (D) mm
- Weight: 13 kg

1 Piece 1 **7883** ²¹

Drain tap and oil change accessories



Drain cock DIN 61 with disposable seal

Suitable for all LIQUI MOLY oil canisters in 20-liter containers with ventilation and DIN 61 thread. Drain cock without ventilation. Spare seals (sealing rings (4 pieces), part no. 29130).

1 Piece 1 **7924** ²¹

ACCESSORIES FOR CONTAINERS/DRUMS



Drain tap and oil change accessories



Sealing rings (4 pieces)

Spare seals for the drain cock, part no. 29122 and part no. 7924.

Area of use

Cont.

Packaging
Unit

Part
no.

1 Piece 50 **29130** ²¹



Hand Pump

plastic pump incl. universal hose and adapter

- adapter for metric thread and imperial screw joints
- for all 1 l containers from LIQUI MOLY
- for 0.5 l and 5 l containers from LIQUI MOLY with SK 38 thread

For filling transmissions and other units such as outboard motors, lawnmowers, emergency power units, riding mowers, snow blowers or motorcycle transmissions.

1 Piece 1 **29026** ²¹



Oil Change Canister

- Capacity 10 l
- Separate venting screw
- Suitable for passenger cars and motorcycles
- Dimensions: 57 x 32 x 13 cm

For environmentally friendly do-it-yourself oil change without lifting platform.

1 Piece 4 **7055** ²¹

ACCESSORIES/TOOL – GREASES

Grease guns



Grease Gun for Cartridges

Grease gun for grease dosing from 400 g grease cartridges.

Device for grease application in the workshop and industry.

1 Piece 1 **5310** ²¹



Lube Shuttle® System Grease Press

Hand-lever grease gun (two-hand operation) for Lube-Shuttle® system cartridges, high-quality design with galvanized grease tank, ergonomically shaped handle and 300 mm safety reinforced rubber hose RH-30C: (steel braid inserts, burst pressure 1650 bar, Ø 13 mm) with 4-jaw hydraulic coupler. Operating pressure over 400 bar, maximum pressure up to approx. 800 bar, TÜV, DLG, BLT tested.

For the application of greases in Lube Shuttle® system cartridges.

1 Piece 1 **3514** ²¹

ACCESSORIES/TOOL – ADHESIVES & SEALANTS - UNDERSEAL

Processors



Spray Gun

The LIQUI MOLY structure gun is suitable for processing 1 liter of underbody and stoneguard protection products and can be used on spots where it is important to restore the original structure. The adjustable spray jet lets you produce various finish structures.

For structure spraying with 1 liter of underbody and stoneguard protection.

1 Piece 1 **6219** ²¹




Cavity Compressed-Air Can Gun


Powder coated aluminum-container with standard compressed air connection and check valve. Filling volume 1 liter. The material volume can be exactly set by using a control valve. Adding air to the directed spray achieves very fine spray material atomization.

For coating difficult to access cavities with preservation products.



1 Piece 1 **6226** ²¹

	Area of use	Cont.	Packaging Unit	Part no.
 <p>Pump Spray Bottle Spray bottle with hand pump. For applying a variety of chemicals. With its chemically resistant Viton seal material, this pump can be used universally. Capacity 0.9 l cleaning liquid.</p>	Universal use for applying and atomizing chemicals such as Rust Solvent, Rapid Cleaner, Multi Spray, Leak Detector and Universal Cleaner. Clean the container and pump when switching over to a different fluid.	1 l	1	3316 ²¹

ACCESSORIES/TOOL – A/C SYSTEM CLEANING

 <p>Air-Conditioner System Cleaner Gun Spray gun with flexible probe that produces a ball-shaped directed spray. The approx. 1.2 liter (0.32 gal) tank is connected to the gun via a quick connector located on the tube and thus enables ideal handling when cleaning.</p>	Cleaning automotive and industrial air conditioners.	1 Piece	1	4090 ⁴⁹
---	--	---------	---	--------------------

ACCESSORIES/TOOL – DIESEL PARTICULATE FILTER PURGE

 <p>DPF Pressurized Tank Spray Gun Powder-coated aluminum tank with commercially available compressed air connection and non-return valve. Filling amount 1 liter. The material quantity can be specified exactly by means of a control valve. The air fed spray stream causes the sprayed material to be very finely atomized.</p>	For the processing of Pro-Line Diesel Particulate Filter Cleaner and Pro-Line Diesel Particulate Filter Purge with the especially developed DPF-Probe with 5 interchangeable tips (part no. 7945).	1 Piece	1	7946 ²¹
 <p>DPF-Probe with 5 interchangeable tips Specially developed probe with 5 different moving tips made from stainless steel for processing Pro-Line Diesel Particulate Filter Cleaner and Pro-Line Diesel Particulate Filter Purge. The probe has a flexible hose connection with a length of 1 m and push-on nipples that fit the DPF pressurized tank spray gun (part no. 7946).</p>	Depending on the type of vehicle, enables ideal access for cleaning passenger car diesel particulate filters (DPF/FAP) when installed.	1 Piece	1	7945 ²¹



First and second
placements



Part No. 9348



Part No. 5245

Part No. 5247



Counter display

Area of use

Display, folding*

Stable sales display made of printed and laminated cardboard with plastic protective edges and loadable trays.

Dimensions of the display:

Height: approx. 153 cm (without topper) width: approx. 55 cm

Height: approx. 182.5 cm (with topper) depth: approx. 31.5 cm

Dimensions of the tray:

Width: approx. 50.5 cm (usable inner dimension)

Depth: approx. 23.5 cm (usable inner dimension of the two top trays)

Depth: approx. 26.5 cm (usable inner dimension of the two bottom trays)

Assembly instructions are included with the display packaging.

Dimensions: Width: approx. 55 cm Height without topper: approx. 153 cm Height with topper: approx. 182.5 cm Depth: approx. 31.5 cm

Futura-Plastic-Rack*

empty

width: 60 cm

depth: 40 cm

height: 160 cm

Topper Futura-Plastic-Rack „Logo“**Topper Futura-Plastic-Rack Motorbike****Topper Futura-Plastic-Rack Marine****Side sections for Futura-Plastic-Rack (2 pieces)**

Attaching the side sections is as easy as it could be. You don't need either tools or fixing materials.

Counter Display LIQUI MOLY*

empty

Dimensions of the display:

Height: approx. 18 cm (without topper)

Height: approx. 38 cm (with topper)

Width: approx. 34 cm

Depth: approx. 26 cm

Topper Counter Display Logo**Topper Counter Display Motorbike**

Cont.	Packaging Unit	Part no.
1 Piece	1	9348

1 Piece	1	9989
---------	---	------

1 Piece	1	9966
---------	---	------

1 Piece	1	50160
---------	---	-------

1 Piece	1	5876
---------	---	------

Standard	1 Piece	1	5245 ²¹
Motorbike	1 Piece	1	5247 ²¹
Marine	1 Piece	1	50439 ²¹

1 Piece	1	9965
---------	---	------

1 Piece	1	9950
---------	---	------

1 Piece	1	9925
---------	---	------

*Standard pallet contents can be viewed upon request or in the Internet. Custom pallet contents are also possible.

TABLE OF CONTENTS, NUMERIC



Part-No.	Description	Cont.	P.U.	Language	Page
1001	Hybrid Additive	250 ml	6	D-GB-I-E-P	7
1007	Gear Protect	80 ml	6	D-GB-NL-F-E-I	5
1010	Lead Substitute	250 ml	6	D-F-NL	7
1012	Oil Additive	200 ml	6	D-F-NL	5
1024	Fully Synthetic Hypoid Gear Oil (GL4/5) 75W-90	1 l	6	D-GB-I-E-P	22
1027	Hypoid Gear Oil (GL5) SAE 85W-140	20 l	1	D-GB-I-E-P	22
1031	Hypoid Gear Oil (GL5) SAE 85W-90	60 l	1	D-GB	22;50
1035	Hypoid Gear Oil (GL5) SAE 85W-90	1 l	6	D-GB-I-E-P	22;50
1047	Hypoid Gear Oil (GL5) SAE 85W-90	20 l	1	D-GB-I-E-P	22;50
1051	2-Stroke Motor Oil	250 ml	12	D	17;67
1052	2-Stroke Motor Oil	1 l	6	D	17;67
1053	Motorbike 2T Synth Scooter Race	1 l	6	D-BOOKLET	55
1080	Lubricant Fix	50 g	12	D	23
1099	Power Steering Oil Leak Stop	35 ml	12	D-GB	6
1110	Hydraulic Oil HLP 46	20 l	1	D-GB-I-E-P	22;67
1121	Touring High Tech Super SHPD 15W-40	20 l	1	D-GB-I-E-P	50
1127	Central Hydraulic System Oil	1 l	6	D-GB-I-E-P	19
1145	Steering Gear Oil 3100	1 l	6	D-GB-I-E-P	18
1147	Central Hydraulic System Oil	20 l	1	D-GB-I-E-P	19
1151	Synthoil Longtime Plus 0W-30	5 l	4	D-GB-I-E-P	11
1182	Fully Synthetic Hypoid-Gear Oil Truck (GL4/5) 75W-90	20 l	1	D-GB-I-E-P	50
1194	Special Tec LL 5W-30	20 l	1	D-GB-I-E-P	13
1195	Special Tec LL 5W-30	60 l	1	D-GB	13
1196	Special Tec LL 5W-30	205 l	1	D-GB	13
1212	MoS ₂ Low-Friction 20W-50	5 l	4	BOOKLET	17
1220	MoS ₂ Low-Friction 20W-50	1 l	6	BOOKLET	17
1221	MoS ₂ Low-Friction 20W-50	205 l	1	D-GB	17
1243	Motorbike 4T 10W-40 Street	4 l	4	D-BOOKLET	53
1264	Lawnmower Oil SAE 30	1 l	6	D-BOOKLET	67
1273	Universal Oil for Garden Equipment 10W-30	1 l	6	D-BOOKLET	67
1280	Bio Saw Chain Oil	1 l	6	D-BOOKLET	67
1282	2-Cycle Power Saw Oil	1 l	6	D	67
1296	Touring High Tech 15W-40	60 l	1	D-GB	17
1298	Touring High Tech 15W-40	20 l	1	D-GB-I-E-P	17
1299	Motorbike Foam Filter Cleaner	1 l	6	D-GB-I-E-P	57
1302	Super Leichtlauf 10W-40	60 l	1	D-GB	16
1303	Super Leichtlauf 10W-40	205 l	1	D-GB	16
1304	Super Leichtlauf 10W-40	20 l	1	D-GB-I-E-P	16
1308	Synthoil High Tech 5W-40	20 l	1	D-GB-I-E-P	15
1362	Synthoil Energy 0W-40	20 l	1	D-GB-I-E-P	12
1378	Leichtlauf HC7 5W-40	20 l	1	D-GB-I-E-P	15
1385	Leichtlauf HC7 5W-40	205 l	1	D-GB	15
1392	Synthoil Race Tech GT1 10W-60	20 l	1	D-GB-I-E-P	17
1393	Synthoil Race Tech GT1 10W-60	60 l	1	D-GB	17
1407	Hypoid Gear Oil (GL4/5) TDL SAE 75W-90	1 l	6	D-GB-I-E-P	22
1410	Hypoid Gear Oil (GL5) LS SAE 85W-90	1 l	6	D-GB-I-E-P	22;51
1414	Fully Synthetic Gear Oil (GL5) SAE 75W-90	1 l	6	D-GB-I-E-P	21
1415	Fully Synthetic Gear Oil (GL5) SAE 75W-90	20 l	1	D-GB-I-E-P	21
1439	Formula Super 15W-40	1 l	6	D	17
1440	Formula Super 15W-40	5 l	4	D	17
1443	Formula Super 15W-40	205 l	1	D-GB	17
1451	Formula Super 15W-40	20 l	1	D-GB	17
1486	Paint Cleaner	500 ml	6	D-GB-I-E-P	26
1502	Motorbike 4T Synth 10W-50 Street Race	1 l	6	D-BOOKLET	54
1506	Motorbike Fork Oil 10W medium	500 ml	6	D-GB-I-E-P	56
1508	Motorbike Chain Lube	250 ml	12	D-GB-E	57
1509	Motorbike Cleaner	1 l	6	D-GB-I-E-P-F	57
1512	Windshield Cleaner Foam	300 ml	12	D-GB-I-E-P	28
1516	Motorbike Gear Oil 75W-90	500 ml	6	D-GB-I-E-P	56
1517	Windshield Super-Concentrated Cleaner citrus	50 ml	40	D	28
1519	Windshield Super-Concentrated Cleaner citrus	250 ml	6	D-GB	28
1520	Copper Spray	250 ml	12	D-GB-I	24
1523	Motorbike Fork Oil 5W light	500 ml	6	D-GB-I-E-P	56
1528	Door Lock Care	50 ml	24	D	35
1532	Paint Polishing Cream	300 g	6	D	27
1536	Plastic Deep Treatment	500 ml	6	D-GB-I-E-P	29
1538	Rubber Care	500 ml	6	D-GB-I-E-P	30
1539	Upholstery Foam Cleaner	300 ml	12	D-GB-I-E	29

Part-No.	Description	Cont.	P.U.	Language	Page
1540	Zinc Spray	400 ml	6	D-GB-I-E-P	36;46
1542	Car Wash & Wax	1 l	6	D-GB-I-E-P	26
1543	Insect Remover	500 ml	6	D-GB-I-E-P	26-27
1545	Car Wash Shampoo	1 l	6	D-GB-I-E-P	27
1547	Car Interior Cleaner	500 ml	6	D-GB-I-E-P	29
1548	Insect Removal Sponge	1 pc	12	D	27;27
1549	Car Washing Sponge	1 pc	12	D	26
1552	„Like new“ Plastic Care	250 ml	6	D-GB-I-E-P	30
1554	Leather Care	250 ml	6	D-GB-I-E-P	29
1562	Motorbike 4T 10W-40 Street	20 l	1	D-GB	53
1563	Motorbike 4T 10W-40 Street	60 l	1	D-GB	53
1566	Motorbike 2T Synth Street Race	20 l	1	D-GB	55
1567	Motorbike 4T Synth 10W-50 Street Race	20 l	1	D-GB	54
1568	Motorbike 4T 10W-40 Street	205 l	1	D-GB	53
1571	Motorbike Visor Cleaner	100 ml	12	D-GB	58
1579	Motorbike Tire Inflator and Sealer	300 ml	12	D-GB-E	58
1581	Motorbike 4T Bike-Additive	125 ml	6	D-GB	53
1591	Motorbike Chain Lube white	400 ml	12	D-GB-E-P	57
1594	Fabric Impregnation	400 ml	6	D-GB-I	28
1597	Special Rim Cleaner	1 l	6	D-GB-I-E-P	28
1600	Tar Remover	400 ml	6	D-GB-E-P	26
1602	Motorbike Chain and Brake Cleaner	500 ml	6	D-GB-E-P	57
1603	Motorbike Helmet Interior Cleaner	300 ml	12	D-GB-E-P	58
1604	Motorbike Foam Filter Oil (Spray)	400 ml	6	D-GB-E-P	57
1609	Tire Bright Foam	400 ml	6	D-GB-I-E-P	28
1610	Cockpit Bright	600 ml	12	D-GB-I-E-P	29
1611	Rust Solvent XXL	600 ml	12	D-GB-I-E-P	34
1614	MoS ₂ -Rust Solvent	300 ml	12	D-GB-I-E-P	34
1625	Motorbike Foam Filter Oil	500 ml	6	D-GB-E-P	57
1641	Ceramic Rust Solvent with Freeze-Shock Effect	300 ml	6	D-GB-E-P	34
1647	Gloss Spray Wax	400 ml	6	D-GB-I-E-P	27
1653	Universal Cleaner	1 l	6	D-GB-I-E-P	37
1654	Universal Cleaner	5 l	1	D-GB-I-E-P	37
1655	Universal Cleaner	20 l	1	D-GB-I-E-P	37
1657	Motorbike Engine Flush	250 ml	6	D-GB-E-P	53
1661	Speed Air Freshener lemon	1 pc	25	D-GB-RUS-UA	29
1664	Speed Air Freshener sport fresh	1 pc	25	D-GB-RUS-UA	29
1685	Motorbike 4T Synth 5W-40 Street Race	4 l	4	D-BOOKLET	53
1686	Motorbike 4T Synth 10W-50 Street Race	4 l	4	D-BOOKLET	54
1687	Motorbike 4T Synth 10W-60 Street Race	4 l	4	D-BOOKLET	54
1689	Motorbike 4T 15W-50 Street	4 l	4	D-BOOKLET	54
1803	Injection Cleaner	300 ml	20	GB-GR-I	6
1804	Radiator Cleaner	300 ml	20	GB-GR-I	8
1806	Super Diesel Additive	250 ml	20	GB-GR-I	7;49
1838	Lead Substitute	250 ml	12	GB-GR-I	7
1856	Synthoil High Tech 5W-40	5 l	4	BOOKLET	15
2101	Leichtlauf Performance 10W-40	60 l	1	D-GB	16
2102	Leichtlauf Performance 10W-40	205 l	1	D-GB	16
2309	Leichtlauf HC7 5W-40	5 l	4	BOOKLET	15
2315	Top Tec 4600 5W-30	1 l	6	BOOKLET	14
2316	Top Tec 4600 5W-30	5 l	4	BOOKLET	14
2317	Top Tec 4500 5W-30	1 l	6	BOOKLET	14
2318	Top Tec 4500 5W-30	5 l	4	BOOKLET	14
2320	Scratch Stop	200 ml	12	D-GB-F-ARAB	26
2322	Top Tec 4400 5W-30	5 l	4	BOOKLET	14
2325	Special Tec F 5W-30	1 l	6	BOOKLET	13
2326	Special Tec F 5W-30	5 l	4	BOOKLET	13
2327	Leichtlauf High Tech 5W-40	1 l	6	BOOKLET	15
2328	Leichtlauf High Tech 5W-40	5 l	4	BOOKLET	15
2336	Pro-Line Super Diesel Additive K	20 l	1	D-GB	40;49
2361	Top Tec 4310 0W-30	1 l	6	BOOKLET	11
2362	Top Tec 4310 0W-30	5 l	4	BOOKLET	11
2363	Special Tec V 0W-30	20 l	1	D-GB	11
2427	Pro-Line Engine Flush	500 ml	6	D-GB-E-P	40;49
2428	Pro-Line Engine Flush	5 l	3	D-GB	40;49
2447	Special Tec LL 5W-30	1 l	6	BOOKLET	13
2448	Special Tec LL 5W-30	5 l	4	BOOKLET	13
2507	Carburetor and Valve Cleaner	300 ml	20	GB-ARAB-F	6

TABLE OF CONTENTS, NUMERIC

Part-No.	Description	Cont.	P.U.	Language	Page
2510	Gear-Oil Additive	50 g	12	GB-I-E	6
2512	Automatic Transmission Cleaner	300 ml	6	D-GB-I-E-P	6
2530	Fuel Protect Gasoline	300 ml	20	GB-ARAB-F	7
2537	Leichtlauf Performance 10W-40	20 l	1	D-GB	16
2542	Molygen 5W-50	1 l	12	BOOKLET	16
2543	Molygen 5W-50	4 l	4	BOOKLET	16
2565	Motorbike 4T 15W-50 Street	60 l	1	D-GB	54
2566	Motorbike 4T 15W-50 Street	205 l	1	D-GB	54
2592	Motorbike 4T Synth 5W-40 Street Race	1 l	6	D-BOOKLET	53
2715	Motorbike Fork Oil 10W medium	1 l	6	D-GB-I-E-P	56
2716	Motorbike Fork Oil 5W light	1 l	6	D-GB-I-E-P	56
2719	Motorbike Fork Oil 7,5W medium/light	1 l	6	D-GB-I-E-P	56
2782	Motor Oil Saver	300 ml	6	GB-AUS	5
2783	Hydraulic Lifter Additive	300 ml	6	GB-AUS	5
2852	Special Tec V 0W-30	1 l	6	BOOKLET	11
2853	Special Tec V 0W-30	5 l	4	BOOKLET	11
2956	Octane Plus	150 ml	20	GB-GR-I	7
3010	LM 48 Installation Paste	50 g	12	D	24
3016	Motorbike Fork Oil 5W light	20 l	1	D-GB	56
3018	Motorbike 4T Synth 5W-40 Offroad Race	1 l	6	D-BOOKLET	54
3019	Motorbike 4T Synth 5W-40 Offroad Race	4 l	4	D-BOOKLET	54
3021	Tire Fitting Paste white	5 kg	1	D-GB-I-E-P	24;28
3039	Motorbike Gloss Spray Wax	400 ml	6	D-GB-E-P	58
3041	Motorbike Gasoline Stabilizer	250 ml	6	D-GB-E-P	53
3044	Motorbike 4T 10W-40	1 l	6	D-BOOKLET	53
3046	Motorbike 4T 10W-40	4 l	4	D-BOOKLET	53
3051	Motorbike 4T Synth 10W-50 Offroad Race	1 l	6	D-BOOKLET	55
3052	Motorbike 4T Synth 10W-50 Offroad Race	4 l	4	D-BOOKLET	55
3054	Motorbike 4T Synth 10W-60 Offroad Race	4 l	4	D-BOOKLET	55
3055	Motorbike 4T 10W-40 Offroad	1 l	6	D-BOOKLET	54
3056	Motorbike 4T 10W-40 Offroad	4 l	4	D-BOOKLET	54
3060	LM 49 Fluid Paste	500 g	4	D-GB-I-E-P	24
3063	Motorbike 2T Synth Offroad Race	1 l	6	D-BOOKLET	55
3064	Motorbike 2T Synth Offroad Race	4 l	4	D-BOOKLET	55
3074	Brake Anti-Squeal Paste (can with brush)	200 ml	6	D-GB-I-E	24
3081	Copper Paste	250 g	6	D-GB-I-E-P	24
3085	Brake Fluid DOT 4	500 ml	6	D-GB-I-P	32
3087	Motorbike Gear Oil 10W-30	1 l	6	D-GB-I-E-P	56
3096	Motorbike Foam Filter Oil	1 l	6	D-GB-E-P	57
3141	Battery Clamp Grease Spray	300 ml	6	D-GB-I-E-P	23
3304	Multi-Spray Plus 7	300 ml	12	D-GB-I-E-P	34
3305	Multi-Spray Plus 7	500 ml	12	D-GB-E-P-F-RUS-ARAB	34
3312	Silicone Grease Transparent	100 g	12	D-GB-E	23
3315	Oil Spot Remover	400 ml	6	D-GB-I	37
3316	Pump Spray Bottle	1 l	1	D	73
3318	Rapid Cleaner Brake & Parts Cleaner (Spray)	500 ml	12	D-GB-I-E-P	37
3319	Rapid Cleaner	5 l	1	D-GB-I	37
3325	Carburetor Housing Cleaner	400 ml	12	D-GB-I-E-P	30
3332	Wall Bracket for Liquid Hand Cleaner	1 pc	1	D	38
3333	Rapid Cleaner	60 l	1	D-GB	37
3334	Invisible Glove	650 ml	4	D-GB-F-I-E-NL-P	38
3335	Dispenser for Liquid Hand Cleaner	1 pc	1	D	38
3339	Fluorescent Leak Finder K	50 ml	12	D-GB	35
3342	Exhaust Assembly Paste	150 g	6	D-GB-I-E-P	24;36
3343	Tire Repair Spray	500 ml	6	D-GB-I-E	35
3347	Truck Lubricating Grease KP2K-30	400 g	20	D-GB-I-E-P	23;51
3350	Leak Finder Spray	400 ml	6	D-GB-I-E-P	35
3354	Liquid Hand Cleaning Paste	10 l	1	D-GB-I-E-P	37
3363	Hand Cleaning Paste	12,5 l	1	D-GB-F-I-E-NL-P	38
3365	Liquid Hand Cleaner	3 l	6	D-GB-F-I-E-NL-P	37
3379	Pro-Line Injector and Glow Plug Dismantling Aid	400 ml	6	D-GB-I-E-P	42
3381	Pro-Line Injector and Glow Plug Grease	20 g	12	D-GB	42
3391	LM 40 Multi-Purpose Spray	400 ml	12	D-GB-I-E-P	34;67
3406	LM 50 Litho HT	400 g	12	D-GB-F-E-NL	23
3514	Lube Shuttle® System Grease Press	1 pc	1	D	72
3520	LM 47 Long-Life Grease + MoS ₂	400 g	12	D-GB-I-E-P	23
3530	LM 47 Long-Life Grease + MoS ₂	1 kg	4	D-GB-I-E-P	23
3552	Multipurpose Grease	400 g	12	D-GB-I-E-P	23

Part-No.	Description	Cont.	P.U.	Language	Page
3555	Multipurpose Grease	25 kg	1	D-GB	23
3623	Sealant Remover	300 ml	6	D-GB-I-E-P	34
3640	Dual Clutch Transmission Oil 8100	1 l	6	D-GB-I-E-P	17
3641	Dual Clutch Transmission Oil 8100	20 l	1	D-GB-I-E-P	17
3642	Dual Clutch Transmission Oil 8100	60 l	1	D-GB	17
3648	Top Tec ATF 1900	1 l	6	D-GB-I-E-P	19
3649	Top Tec ATF 1900	20 l	1	D-GB-I-E-P	19
3651	Top Tec ATF 1100	1 l	6	D-GB-I-E-P	18;50
3653	Top Tec ATF 1100	20 l	1	D-GB-I-E-P	18;50
3658	Gear Oil (GL5) 75W-80	1 l	6	D-GB-I-E-P	21
3659	Top Tec ATF 1600	1 l	6	D-GB-I-E-P	18
3662	Top Tec ATF 1400	1 l	6	D-GB-I-E-P	18
3664	Central Hydraulic System Oil 2200	1 l	6	D-GB-I-E-P	19
3665	Central Hydraulic System Oil 2300	1 l	6	D-GB-I-E-P	20
3666	Central Hydraulic System Oil 2400	1 l	6	D-GB-I-E-P	20
3667	Central Hydraulic System Oil 2500	1 l	6	D-GB-I-E-P	20
3679	Brake Fluid Racing	250 ml	24	GB-ARAB-F	32;58
3681	Top Tec ATF 1200	1 l	6	D-GB-I-E-P	18
3682	Top Tec ATF 1200	5 l	4	D-GB-I-E-P	18
3683	Top Tec ATF 1200	20 l	1	D-GB-I-E-P	18
3685	Top Tec ATF 1200	205 l	1	D-GB	18
3687	Top Tec ATF 1800	1 l	6	D-GB-I-E-P	19
3688	Top Tec ATF 1800	20 l	1	D-GB-I-E-P	19
3689	Top Tec ATF 1800	60 l	1	D-GB	19
3692	Top Tec ATF 1400	20 l	1	D-GB-I-E-P	18
3694	Top Tec ATF 1600	20 l	1	D-GB-I-E-P	18
3702	Top Tec 4100 5W-40	20 l	1	D-GB-I-E-P	16
3703	Top Tec 4100 5W-40	60 l	1	D-GB	16
3704	Top Tec 4100 5W-40	205 l	1	D-GB	16
3708	Top Tec 4200 5W-30 New Generation	20 l	1	D-GB-I-E-P	14
3709	Top Tec 4200 5W-30 New Generation	60 l	1	D-GB	14
3711	Top Tec 4200 5W-30 New Generation	205 l	1	D-GB	14
3720	Speed Tec Gasoline	250 ml	6	D-GB-I	6
3721	Cera Tec	300 ml	6	D-GB-I-E-P-NL-F-ARAB-RUS	5
3731	Top Tec 4500 5W-30	20 l	1	D-GB-I-E-P	14
3732	Top Tec 4500 5W-30	60 l	1	D-GB	14
3737	Top Tec 4310 0W-30	20 l	1	D-GB-I-E-P	11
3739	Top Tec 4310 0W-30	205 l	1	D-GB	11
3752	Top Tec 4400 5W-30	20 l	1	D-GB-I-E-P	14
3757	Top Tec 4600 5W-30	20 l	1	D-GB-I-E-P	14
3758	Top Tec 4600 5W-30	60 l	1	D-GB	14
3759	Top Tec 4600 5W-30	205 l	1	D-GB	14
3778	Top Tec Truck 4450 15W-40	20 l	1	D-GB-I-E-P	50
3780	Top Tec Truck 4450 15W-40	205 l	1	D-GB	50
3794	Top Tec Truck 4050 10W-40	20 l	1	D-GB-I-E-P	49
3798	Top Tec Truck 4050 10W-40	205 l	1	D-GB	49
3801	Screw-Retainer Medium Strength	10 g	20	D	46
3802	Screw-Retainer Medium Strength	50 g	12	D-GB-E	46
3803	Screw-Retainer High Strength	10 g	20	D	46
3804	Screw-Retainer High Strength	50 g	12	D-GB-E	46
3805	Instant Glue	10 g	24	D	46
3807	Bushing and Bearing Fixation	50 g	12	D	46
3808	Pipe Sealant	10 g	6	D	45
3816	Motorbike HD Synth 20W-50 Street	1 l	6	D-BOOKLET	54
3817	Motorbike HD Synth 20W-50 Street	4 l	4	D-BOOKLET	54
3818	Motorbike HD Synth 20W-50 Street	20 l	1	D-GB	54
3822	Motorbike Gear Oil HD 150	1 l	6	D-GB-I-E-P	56
3825	Motorbike Gear Oil 75W-90	1 l	6	D-GB-I-E-P	56
3834	Special Tec AA 5W-20	20 l	1	D-GB-I-E-P	12
3842	Special Tec F ECO 5W-20	20 l	1	D-GB-I-E-P	12
3854	Special Tec F 5W-30	20 l	1	D-GB-I-E-P	13
3856	Special Tec F 5W-30	60 l	1	D-GB	13
3857	Special Tec F 5W-30	205 l	1	D-GB	13
3867	Leichtlauf High Tech 5W-40	20 l	1	D-GB-I-E-P	15
3868	Leichtlauf High Tech 5W-40	60 l	1	D-GB	15
3869	Leichtlauf High Tech 5W-40	205 l	1	D-GB	15
4066	Air Flow Sensor Cleaner	200 ml	6	D-GB-E	35
4082	PAG Air Conditioning Oil 150	250 ml	6	D-GB-I-E-P	36

TABLE OF CONTENTS, NUMERIC



Part-No.	Description	Cont.	P.U.	Language	Page
4083	PAG Air Conditioning Oil 46	250 ml	6	D-GB-I-E-P	36
4085	V-Belt Spray	400 ml	6	D-GB-I-E	35
4087	A/C System Cleaner (Spray)	250 ml	6	D-GB-I-E-P	36
4090	Air-Conditioner System Cleaner Gun	1 pc	1	D-GB-F-DK-S-NL-I-E-P	73
4091	A/C System Cleaner	1 l	6	D-GB-F-I-E-P	36
4096	LM 48 Installation Paste	1 kg	4	D-GB-I-NL-F	24
4421	Fully Synthetic Hypoid Gear Oil (GL5) LS SAE 75W-140	1 l	6	D-GB-I-E-P	21
4422	Fully Synthetic Hypoid Gear Oil (GL5) LS SAE 75W-140	20 l	1	D-GB	21
4427	High Performance Gear Oil (GL3+) SAE 75W-80	1 l	6	D-GB-I-E-P	21
4428	High Performance Gear Oil (GL3+) SAE 75W-80	20 l	1	D-GB-I-E-P	21
4434	High Performance Gear Oil (GL4+) SAE 75W-90	1 l	6	D-GB-I-E-P	21
4435	High Performance Gear Oil (GL4+) SAE 75W-90	20 l	1	D-GB-I-E-P	21
4436	High Performance Gear Oil (GL4+) SAE 75W-90	60 l	1	D-GB	21
4706	Hypoid Gear Oil (GL5) LS SAE 85W-90	20 l	1	D-GB	22;51
5111	Pro-Line Throttle Valve Cleaner	400 ml	6	D-GB-E-P	41
5113	Injection Cleaner	50 l	1	D-GB	6
5135	ATF Additive	250 ml	6	D-GB-I-E-P	5
5149	Pro-Line JetClean Diesel Injection Cleaner	1 l	6	D-GB-I-E-P	43
5153	Pro-Line Gasoline System Cleaner	500 ml	6	D-GB-I-E-P	40
5154	Pro-Line JetClean Diesel Injection Cleaner	500 ml	6	D-GB-I-E-P	43
5156	Pro-Line Diesel System Cleaner	500 ml	6	D-GB-I-E-P	40
5168	Pro-Line Intake System Cleaner Diesel	400 ml	6	D-GB	41
5169	Pro-Line Diesel Particulate Filter Cleaner	1 l	6	D-GB-I-E-P	41
5171	Pro-Line Diesel Particulate Filter Purge	500 ml	6	D-GB-I-E-P	41
5178	Pro-Line Radiator Stop Leak K	250 ml	12	D-GB-I-E-P	41
5189	Pro-Line Radiator Cleaner	1 l	6	D-GB-I-E-P	41
5196	Pro-Line Visco-Plus	1 l	6	D-GB-I-E-P	40
5245	Side sections for Futura-Plastic-Rack (2 pieces)	1 pc	1	D	75
5247	Side sections for Futura-Plastic-Rack (2 pieces)	1 pc	1	D	75
5310	Grease Gun for Cartridges	1 pc	1	D	72
5876	Topper Futura-Plastic-Rack Marine	1 pc	45	D	75
6000	Weld Primer Spray	400 ml	6	D-GB-I	46
6107	Cavity Protection, light brown (Spray)	500 ml	12	D-GB-I-NL-P	47
6108	Cavity Protection, light brown	1 l	12	D-GB-I-NL-P	47
6109	Stoneguard, black (Spray)	500 ml	12	D-GB-I-NL-P	47
6113	Underseal, black (Spray)	500 ml	12	D-GB-I-NL-P	47
6114	Underseal, black	1 l	12	D-GB-I-NL-P	47
6118	Cavity Protection, transparent	10 l	1	D-GB-F-I-E-NL-P	47
6135	Cable Grease (Spray)	500 ml	12	D-GB-I-E-P	47
6177	Silicone Sealing Compound, black	80 ml	12	D-GB-F-ARAB	45
6179	Liquimate 2-Component Power Adhesive	25 ml	6	D-GB-E	45
6183	Epoxy Adhesive	25 ml	6	D-GB-E-P	45
6184	Silicone Sealing Compound, transparent	200 ml	6	D-GB-F-I-E-NL-P	45
6185	Silicone Sealing Compound, black	200 ml	6	D-GB-F-I-E-NL-P	45
6192	Adhesive Body Spray	400 ml	12	D-GB-I-E	46
6196	Glass Sealing Compound; can be dapped off	310 ml	12	D-GB-F-I-E-NL-P	45
6219	Spray Gun	1 pc	1	D	72
6226	Cavity Compressed-Air Can Gun	1 pc	1	D	72
6738	Special Tec AA 0W-20	1 l	6	BOOKLET	10
6739	Special Tec AA 0W-20	5 l	4	BOOKLET	10
6902	Windshield De-Icer	500 ml	6	D-GB-I-P	30
6925	Windshield Cleaner Compact	1 pc	24	D-GB-RUS-ARAB	28
7055	Oil Change Canister	1 pc	4	D	72
7180	Diesel Particulate Filter Protector	250 ml	20	GB-GR-I	8
7250	Oil & Chemical Binding Agents	25 l	1	D-GB-I-E-P	37
7384	Pro-Line PTFE Powder Spray	400 ml	6	D-GB-I-E-P	41
7385	Pro-Line Ceramic Spray	400 ml	6	D-GB-I-E-P	42
7386	Pro-Line Electronic Spray	400 ml	6	D-GB-I-E-P	42
7387	Pro-Line Maintenance Spray, white	400 ml	6	D-GB-I-E-P	42
7388	Pro-Line Tacky Lube Spray	400 ml	6	D-GB-I-E-P	42
7389	Pro-Line Silicone Spray	400 ml	6	D-GB-I-E-P	42
7390	Pro-Line Rapid Rust Solvent	400 ml	6	D-GB-I-E-P	43
7509	Car Wash Shampoo	20 l	1	D	27
7517	Special Tec AA 5W-30	20 l	1	D-GB-I-E-P	13
7518	Special Tec AA 5W-30	205 l	1	D-GB	13
7530	Special Tec AA 5W-30	5 l	4	BOOKLET	13
7615	Special Tec AA 5W-30	1 l	6	BOOKLET	13
7838	Hose reel, closed	1 pc	1	D	71

Part-No.	Description	Cont.	P.U.	Language	Page
7883	Hose reel, open	1 pc	1	D	71
7924	Drain cock DIN 61 with disposable seal	1 pc	1	D	71
7932	Plastic Hand Pump	1 pc	1	D	71
7941	Oil Filling Unit for Transmissions	1 pc	1	D	71
7945	DPF-Probe with 5 interchangeable tips	1 pc	1	D	73
7946	DPF Pressurized Tank Spray Gun	1 pc	1	D	73
7988	Drum Fill Level Indicator	1 pc	1	D	71
8071	Special Tec AA 0W-20	20 l	1	D-GB-I-E-P	10
8072	Special Tec AA 0W-20	60 l	1	D-GB	10
8198	Gloss Waxing Shampoo	10 l	1	D	27;51
8374	Engine Flush Plus	300 ml	20	GB-ARAB-F	6
8380	Diesel Purge	500 ml	20	GB-ARAB-F	8
8460	Special Tec LR 5W-20	5 l	4	BOOKLET	12
8536	Molygen New Generation 5W-40	5 l	4	BOOKLET	15
8576	Molygen New Generation 5W-40	1 l	12	BOOKLET	15
8578	Molygen New Generation 5W-40	4 l	4	BOOKLET	15
8902	Special Tec F 0W-30	1 l	6	BOOKLET	11
8903	Special Tec F 0W-30	5 l	4	BOOKLET	11
8908	Synthoil Race Tech GT1 10W-60	1 l	6	BOOKLET	17
8909	Synthoil Race Tech GT1 10W-60	5 l	4	BOOKLET	17
8916	Cold Spray	400 ml	6	D-GB-NL-F	34
8931	Catalytic-System Cleaner	300 ml	20	GB-GR-I	7
8948	Silicone Sealing Compound, red	80 ml	12	D-GB-F-ARAB	45
8953	Common Rail Additive	250 ml	6	GB-GR-I	8
8956	Radiator Stop Leak	150 ml	20	GB-GR-I	8
8958	Viscoplus for Oil	300 ml	20	GB-GR-I	5
8972	Top Tec 4200 5W-30 New Generation	1 l	6	BOOKLET	14
8973	Top Tec 4200 5W-30 New Generation	5 l	4	BOOKLET	14
9001	2K A/C System Cleaner	1 pc	1	D-GB-F-E-P-ARAB-RUS-TR	36
9348	Display, folding*	1 pc	1	D	75
9503	Super Leichtlauf 10W-40	1 l	6	BOOKLET	16
9505	Super Leichtlauf 10W-40	5 l	4	BOOKLET	16
9510	Top Tec 4100 5W-40	1 l	6	BOOKLET	16
9511	Top Tec 4100 5W-40	5 l	4	BOOKLET	16
9515	Synthoil Energy 0W-40	5 l	4	BOOKLET	12
9925	Topper Counter Display Motorbike	1 pc	1	D	75
9950	Topper Counter Display Logo	1 pc	130	D	75
9955	Molygen New Generation 10W-40	1 l	12	BOOKLET	16
9965	Counter Display LIQUI MOLY*	1 pc	1	D	75
9966	Topper Futura-Plastic-Rack „Logo“	1 pc	1	D	75
9989	Futura-Plastic-Rack*	1 pc	1	D	75
20000	Klima Refresh	75 ml	12	D-GB-I-E-P	36
20614	Top Tec ATF 1400	60 l	1	D-GB	18
20624	Top Tec ATF 1800	205 l	1	D-GB	19
20626	Dual Clutch Transmission Oil 8100	5 l	4	D-GB-I-E-P	17
20631	Special Tec V 0W-20	1 l	6	BOOKLET	10
20632	Special Tec V 0W-20	5 l	4	BOOKLET	10
20633	Special Tec V 0W-20	20 l	1	D-GB-I-E-P	10
20649	Polishing Microfiber Cloth	1 pc	6	D	27
20724	Special Tec F 0W-30	20 l	1	D-GB-I-E-P	11
20753	Motorbike 4T Synth 10W-40 Street Race	1 l	6	D-BOOKLET	53
20754	Motorbike 4T Synth 10W-40 Street Race	4 l	4	D-BOOKLET	53
20766	Pro-Line Turbocharger Additive	20 g	12	D	40
20768	Start Fix	200 ml	12	D-GB-E-P	35;67
20777	Top Tec 6100 0W-30	1 l	6	BOOKLET	12
20779	Top Tec 6100 0W-30	5 l	4	BOOKLET	12
20782	Top Tec 6200 0W-20	20 l	1	D-GB	10
20783	Top Tec 6200 0W-20	60 l	1	D-GB	10
20785	Top Tec 6200 0W-20	205 l	1	D-GB	10
20787	Top Tec 6200 0W-20	1 l	6	BOOKLET	10
20789	Top Tec 6200 0W-20	5 l	4	BOOKLET	10
20792	Special Tec AA 5W-20	1 l	6	BOOKLET	12
20793	Special Tec AA 5W-20	5 l	4	BOOKLET	12
20795	MoS ₂ Low-Friction 20W-50	20 l	1	D-GB	17
20842	Top Tec MTF 5100 75W	1 l	6	D-GB-I-E-P	20
20843	Top Tec MTF 5100 75W	20 l	1	D-GB	20
20845	Top Tec MTF 5200 75W-80	1 l	6	D-GB-I-E-P	20
20846	Top Tec MTF 5200 75W-80	20 l	1	D-GB-I-E-P	20

TABLE OF CONTENTS, NUMERIC



Part-No.	Description	Cont.	P.U.	Language	Page
20972	Motorbike Shock Absorber Oil RACE	1 l	6	D-GB-I-E-P	56
21123	Leichtlauf HC7 5W-30	205 l	1	D-GB	13
21127	Radiator Antifreeze KFS 11	20 l	1	D-GB-I-E-P	33
21134	Radiator Antifreeze KFS 12++	1 l	6	D-GB	33
21135	Radiator Antifreeze KFS 12++	5 l	4	D-GB-I-E-P	33
21136	Radiator Antifreeze KFS 12++	20 l	1	D-GB-I-E-P	33
21137	Radiator Antifreeze KFS 12++	60 l	1	D-GB	33
21138	Radiator Antifreeze KFS 12+	20 l	1	D-GB	33
21139	Radiator Antifreeze KFS 13	1 l	6	D-GB	33
21140	Radiator Antifreeze KFS 13	5 l	4	D-GB-I-E-P	33
21141	Radiator Antifreeze KFS 13	20 l	1	D-GB-I-E-P	33
21145	Radiator Antifreeze KFS 12+	1 l	6	D-GB	33
21146	Radiator Antifreeze KFS 12+	5 l	4	D-GB-I-E-P	33
21148	Radiator Antifreeze KFS 12+	200 l	1	D-GB	33
21149	Radiator Antifreeze KFS 11	1 l	6	D	33
21150	Radiator Antifreeze KFS 11	5 l	4	D-GB-I-E-P	33
21155	Brake Fluid DOT 4	250 ml	6	D	32;58
21156	Brake Fluid DOT 4	500 ml	6	D-GB	32;58
21158	Brake Fluid DOT 4	5 l	4	D-GB	32;58
21159	Brake Fluid DOT 4	20 l	1	D-GB-I-E-P	32;58
21160	Brake Fluid DOT 5.1	250 ml	6	D	32
21167	Brake Fluid SL6 DOT 4	500 ml	6	D	32
21172	Brake Fluid Racing	500 ml	6	D-GB	32;58
21176	Top Tec ATF 1600	5 l	4	D-GB-I-E-P	18
21217	Top Tec 6300 0W-20	5 l	4	BOOKLET	10
21224	Molygen New Generation 5W-30 DPF	1 l	12	BOOKLET	13
21225	Molygen New Generation 5W-30 DPF	4 l	4	BOOKLET	13
21254	Molygen New Generation 10W-40	5 l	4	ALGERIEN-GB-ARAB-F	16
21281	Pro-Line Direct Injection Cleaner	120 ml	6	D-GB	40
21285	Rapid Cleaner	20 l	1	GB-AUS	37
21304	Radiator Antifreeze KFS 12++	200 l	1	D-GB	33
21317	Anti-bacterial Diesel additive	1 l	6	D-GB-F-I-NL-GR	8;49
21324	Special Tec AA 0W-16	20 l	1	D-GB-I-F-E-P-DK-FIN-N-S	10
21326	Special Tec AA 0W-16	1 l	6	BOOKLET	10
21328	Special Tec AA 0W-16	5 l	4	BOOKLET	10
21330	Special Tec AA 5W-40 Diesel	1 l	6	D-BOOKLET	15
21332	Special Tec AA 5W-40 Diesel	5 l	4	D-BOOKLET	15
21356	Molygen New Generation 0W-20	1 l	12	BOOKLET	11
21357	Molygen New Generation 0W-20	4 l	4	BOOKLET	11
21359	Top Tec MTF 5300 70W-75W	1 l	6	D-GB-I-E-P	21
21360	Top Tec MTF 5300 70W-75W	20 l	1	BOOKLET	21
21363	Leichtlauf Performance 5W-30	1 l	12	BOOKLET	12
21364	Leichtlauf Performance 5W-30	5 l	4	BOOKLET	12
21365	Leichtlauf Performance 5W-30	20 l	1	D-GB-I-F-E-P-DK-FIN-N-S	12
21366	Leichtlauf Performance 5W-30	205 l	1	D-GB	12
21367	Leichtlauf Performance 5W-40	1 l	12	BOOKLET	15
21368	Leichtlauf Performance 5W-40	5 l	4	BOOKLET	15
21369	Leichtlauf Performance 5W-40	20 l	1	D-GB-I-F-E-P-DK-FIN-N-S	15
21370	Leichtlauf Performance 5W-40	205 l	1	D-GB	15
21377	DFI Cleaner	120 ml	6	D-GB	7
21378	Top Tec ATF 1950	1 l	6	D-I-E-P	19
21379	Top Tec ATF 1950	20 l	1	BOOKLET	19
21383	Special Tec B FE 5W-30	20 l	1	D-GB-I-F-E-P-DK-FIN-N-S	13
21385	Special Tec B FE 5W-30	205 l	1	D-GB	13
21399	Top Tec 4410 5W-30	20 l	1	D-BOOKLET	14
21402	Top Tec 4410 5W-30	1 l	6	BOOKLET	14
21404	Top Tec 4410 5W-30	5 l	4	BOOKLET	14
21410	Top Tec 6600 0W-20	1 l	6	BOOKLET	10
21411	Top Tec 6600 0W-20	5 l	4	BOOKLET	10
21412	Top Tec 6600 0W-20	20 l	1	BOOKLET	10
21419	Multi-disc Clutch Oil	1 l	6	D-GB-I-E-P	19
21442	Top Tec 6600 0W-20	60 l	1	D-GB	10
21443	Top Tec 6600 0W-20	205 l	1	D-GB	10
21480	Top Tec 4110 5W-40	20 l	1	D-BOOKLET	16
21604	Top Tec 4210 0W-30	1 l	6	D-BOOKLET	11
21605	Top Tec 4210 0W-30	5 l	4	D-BOOKLET	11
21606	Top Tec 4210 0W-30	20 l	1	D-BOOKLET	11
21608	Top Tec 4210 0W-30	205 l	1	D-GB	11

Part-No.	Description	Cont.	P.U.	Language	Page
21611	Quick Detailer	500 ml	6	D-GB	26
21633	2T Motoroil Race Tec	1 l	6	D-GB	55
21702	Top Tec Gear EV 510	1 l	6	D-GB-I-E-P	20
21745	Battery Coolant EV 200	5 l	4	D-GB	32
21746	Battery Coolant EV 200	20 l	1	D-GB	32
21773	Bike Detailer	500 ml	6	D-GB-F-I-E-P-NL-S-DK-PL-TR	60
21774	Bike Ceramic Chain Spray	200 ml	6	D-GB-F-I-E-NL-P	60
21775	Bike Tire Fix	75 ml	6	D-GB-F-I-E-P-NL-S-DK-PL-TR	60
21776	Bike Chain Spray	400 ml	6	D-BOOKLET	60
21777	Bike Brake and Chain Cleaner	400 ml	6	D-BOOKLET	60
21778	Bike Cleaner	1 l	6	D-GB-E-P-F-NL-I-GR-DK-S-N-FIN	60
21779	Bike Chain Oil Wet Lube	100 ml	6	D-GB-F-I-E-P-NL-S-DK-PL-TR	60
21780	Bike Chain Oil Dry Lube	100 ml	6	D-GB-F-I-E-P-NL-S-DK-PL-TR	60
24391	GUNTEC Gun Oil	100 ml	6	D-GB	69
24392	GUNTEC Gun Grease	50 ml	6	D-GB	69
24394	GUNTEC Barrel and Gun Cleaner	200 ml	6	D-GB	69
24395	GUNTEC Silencer Cleaner	500 ml	6	D-GB-E	69
24396	GUNTEC Gun Care Spray	200 ml	6	GB	69
24397	GUNTEC Gun Grease	20 ml	12	GB	69
25001	Marine Diesel Protect	500 ml	6	GB-DK-N-FIN-S-RUS	62
25002	Marine Diesel Protect	1 l	6	D-F-I-E-GR	62
25005	Marine Super Diesel Additive	500 ml	6	GB-DK-N-FIN-S-RUS	62
25007	Marine Super Diesel Additive	1 l	6	GB-DK-N-FIN-S-RUS	62
25009	Marine Fuel Stabiliser	500 ml	6	GB-DK-N-FIN-S-RUS	62
25011	Marine Fuel System Cleaner	500 ml	6	GB-DK-N-FIN-S-RUS	62
25012	Marine 4T Motor Oil 10W-40	1 l	6	D-BOOKLET	62
25013	Marine 4T Motor Oil 10W-40	5 l	4	D-BOOKLET	62
25014	Marine 4T Motor Oil 10W-40	60 l	1	D-GB	62
25015	Marine 4T Motor Oil 15W-40	1 l	6	D-BOOKLET	63
25016	Marine 4T Motor Oil 15W-40	5 l	4	D-BOOKLET	63
25019	Marine 2T Motor Oil	1 l	6	D-BOOKLET	63
25020	Marine 2T Motor Oil	5 l	4	D-BOOKLET	63
25021	Marine Fully Synthetic 2T Motor Oil	1 l	6	BOOKLET	63
25022	Marine 4T Motor Oil 10W-30	1 l	6	D-BOOKLET	62
25023	Marine 4T Motor Oil 10W-30	5 l	4	D-BOOKLET	62
25026	Marine 4T Motor Oil 25W-40	1 l	6	D-BOOKLET	63
25027	Marine 4T Motor Oil 25W-40	5 l	4	D-BOOKLET	63
25028	Marine 4T Motor Oil 25W-40	20 l	1	D-GB	63
25031	Marine Gear Oil GL4/GL5 80W-90	250 ml	12	GB-DK-N-FIN-S-RUS	64
25037	Marine Fully Synthetic Gear Oil GL4/GL5 75W-90	250 ml	12	GB-DK-N-FIN-S-RUS	64
25042	Marine Grease	250 g	12	GB-DK-N-FIN-S-RUS	64
25044	Marine Grease	400 g	12	GB-DK-N-FIN-S-RUS	64
25046	Marine Winch Grease	100 g	6	GB-DK-N-FIN-S-RUS	64
25052	Marine Multi-Spray	400 ml	6	GB-DK-N-FIN-S-RUS	64
25054	Marine Gloss Spray Wax	400 ml	12	GB-DK-N-FIN-S-RUS	65
25061	Marine 4T Motor Oil 15W-40	20 l	1	D-GB	63
25063	Marine 2T DFI Motor Oil	5 l	4	D-BOOKLET	63
25067	Marine ATF	1 l	6	GB-DK-N-FIN-S-RUS	64
25073	Marine Universal Cleaner K	1 l	6	GB-DK-N-FIN-S-RUS	65
25076	Marine PWC Oil 10W-40	1 l	6	D-BOOKLET	63
25077	Marine PWC Oil 10W-40	4 l	4	D-BOOKLET	63
25079	Marine High Performance Gear Oil 85W-90	1 l	6	GB-DK-N-FIN-S-RUS	64
25080	Marine High Performance Gear Oil 85W-90	20 l	1	D-GB	64
29026	Hand Pump	1 pc	1	D	72
29078	Measuring cup with flexible outlet pipe 3 l	1 pc	1	D	71
29130	Sealing rings (4 pieces)	1 pc	50	D	72
50160	Topper Futura-Plastic-Rack Motorbike	1 pc	1	D	75
50439	Side sections for Futura-Plastic-Rack (2 pieces)	1 pc	1	D	75



LIQUI MOLY GmbH
Jerg-Wieland-Straße 4
89081 Ulm
GERMANY

Phone: +49 731 1420-0
Fax: +49 731 1420-75
E-Mail: info@liqui-moly.com
www.liqui-moly.com

Technical support:
Phone: +49 731 1420-871
E-Mail: support@liqui-moly.com

No liability for misprints.
Subject to technical modifications.

Specifications, approvals and
recommendations correspond to the
status at the time of going to press.



facebook.com/liquimoly



instagram.com/liquimoly



LIQUIMOLYwebTV

58102307

The quick way to find the right oil



It provides information on the right motor oil for a particular vehicle. The LIQUI MOLY app is available free of charge for iOS and Android.

liqui-moly.to/AppStore

liqui-moly.to/PlayStore



YOUR INDEPENDENT SUPPLIER OF QUALITY
NEW CAR PARTS FOR EUROPEAN VEHICLES

Call free **0508 2 SPEED (77333)**
sales@speed.co.nz | www.speed.co.nz
www.liqui-moly.co.nz



SPEED[®]
quality parts for quality cars

